
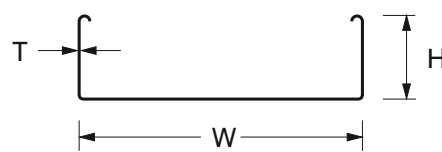
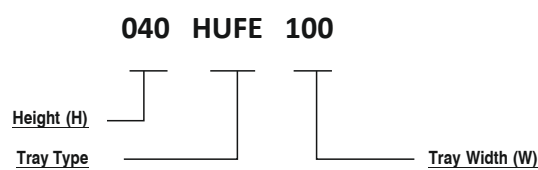


HUFE UNIVERSAL FORMED CABLE TRAYS
Hot-Dip Galvanized (TS EN ISO 1461)


Description	H (mm)	W (mm)	T (mm)	Weight (kg/pcs)
040 HUFE 100	40	100	0,7	1,01
040 HUFE 200	40	200	0,7	1,488
040 HUFE 300	40	300	0,7	2,031
040 HUFE 400	40	400	0,9	3,253
040 HUFE 500	40	500	0,9	3,918
040 HUFE 600	40	600	0,9	4,594
050 HUFE 100	50	100	0,7	1,287
050 HUFE 200	50	200	0,7	1,708
050 HUFE 300	50	300	0,7	2,227
050 HUFE 400	50	400	0,9	3,535
050 HUFE 500	50	500	0,9	4,201
050 HUFE 600	50	600	0,9	4,876
060 HUFE 100	60	100	0,7	1,287
060 HUFE 200	60	200	0,7	1,708
060 HUFE 300	60	300	0,7	2,227
060 HUFE 400	60	400	0,9	3,535
060 HUFE 500	60	500	0,9	4,201
060 HUFE 600	60	600	0,9	4,876

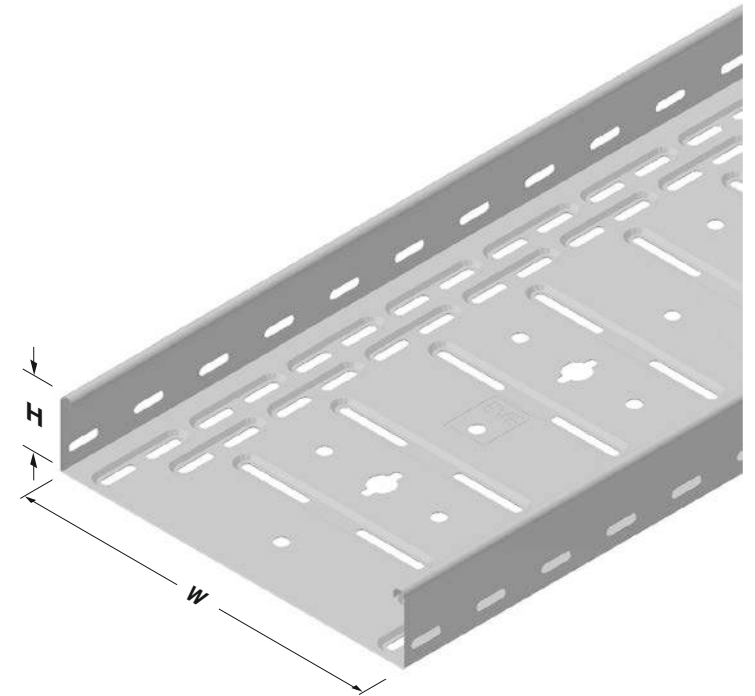

HUFE CABLE TRAYS;
USED WITH HM SERIES MODULES.PLEASE CHECK
ACCESSORIES PAGE.


HUFE-C CONNECTION PART
Hot-Dip Galvanized (TS EN ISO 1461)

H (mm)	T (mm)	Weight (kg/pcs)
40	1,2	0,121
50	1,2	0,153
60	1,2	0,16



Below Accessories should be used for
040/050/060 HUFE-C Connection;

- 4 pcs M6x12 Bolt
- 4 pcs M6 Nut



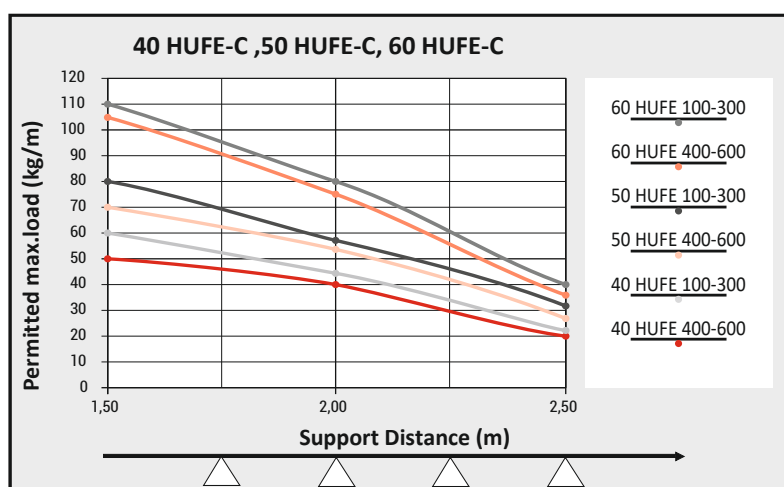


Please inform order code.




Product weights may vary $\pm$ % 10.

HUFE UNIVERSAL FORMED HEAVY DUTY CABLE TRAYS
Hot-Dip Galvanized (TS EN ISO 1461)

Description	H (mm)	W (mm)	T (mm)	Weight (kg/pcs)
040 HUFE 100	40	100	0,8	1,269
040 HUFE 200	40	200	0,8	1,871
040 HUFE 300	40	300	1	3,192
040 HUFE 400	40	400	1	3,976
040 HUFE 500	40	500	1,2	5,747
040 HUFE 600	40	600	1,2	6,737
050 HUFE 100	50	100	0,8	1,426
050 HUFE 200	50	200	0,8	2,009
050 HUFE 300	50	300	1	3,328
050 HUFE 400	50	400	1	4,149
050 HUFE 500	50	500	1,2	5,954
050 HUFE 600	50	600	1,2	6,944
060 HUFE 100	60	100	0,8	1,618
060 HUFE 200	60	200	0,8	2,147
060 HUFE 300	60	300	1	3,5
060 HUFE 400	60	400	1	4,321
060 HUFE 500	60	500	1,2	6,161
060 HUFE 600	60	600	1,2	7,151

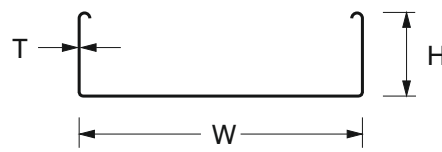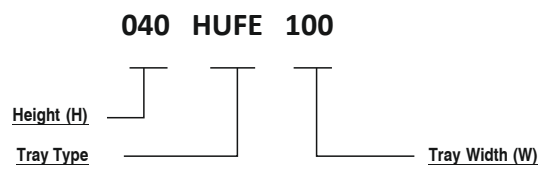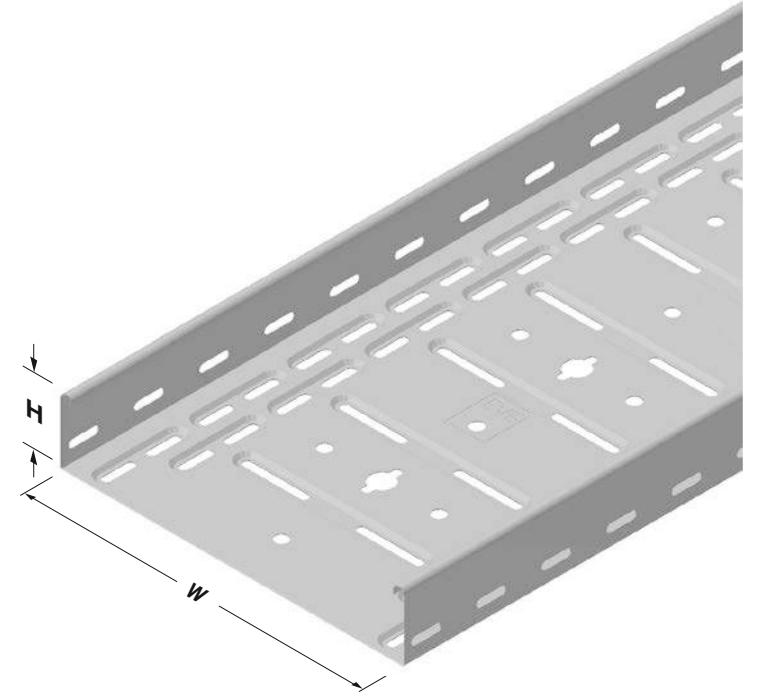

HUFE CABLE TRAYS;
USED WITH HM SERIES MODULES.PLEASE CHECK
ACCESSORIES PAGE.

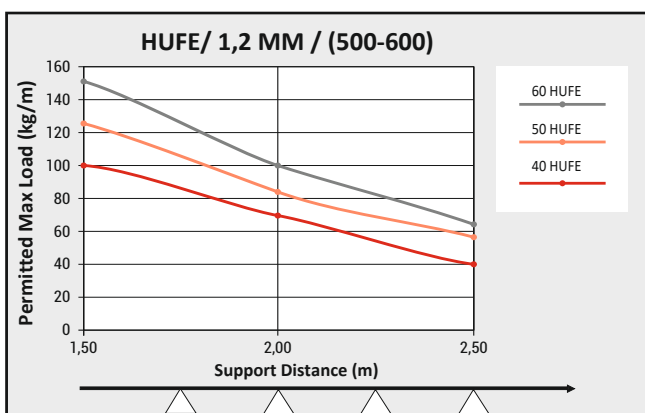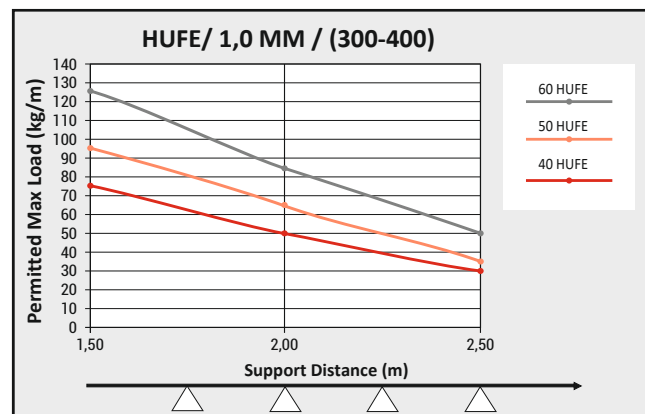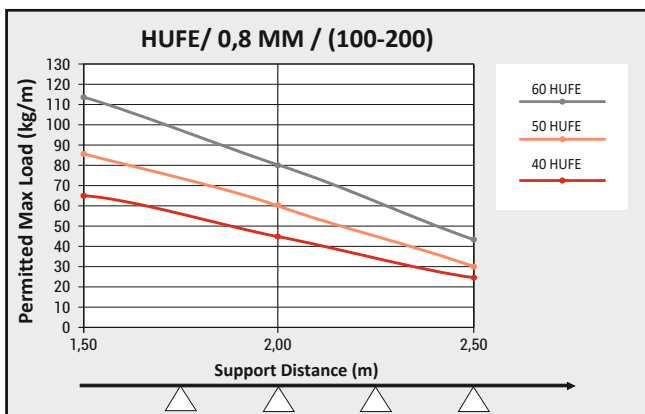

Please inform order code.




Product weights may vary $\pm$ % 10.

CABLE TRAY

HCT CABLE TRAYS

Hot-Dip Galvanized (TS EN ISO 1461)

Description	H (mm)	W (mm)	T (mm)	Weight (kg/pcs)
040 HCT 050	40	50	1	0,95
040 HCT 100	40	100	1	1,31
040 HCT 150	40	150	1	1,66
040 HCT 200	40	200	1	2,01
050 HCT 100	50	100	1	1,48
050 HCT 150	50	150	1	1,83
050 HCT 200	50	200	1	2,19
060 HCT 100	60	100	1	1,65
060 HCT 150	60	150	1	2,01
060 HCT 200	60	200	1	2,36

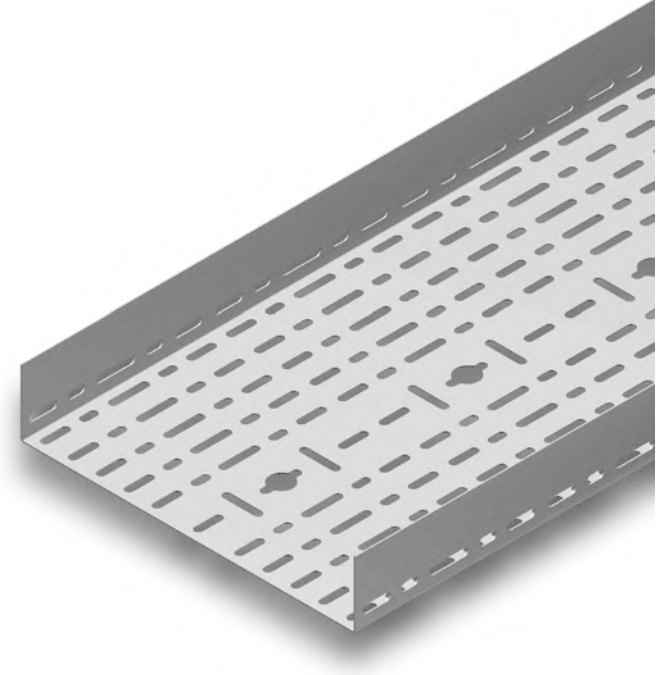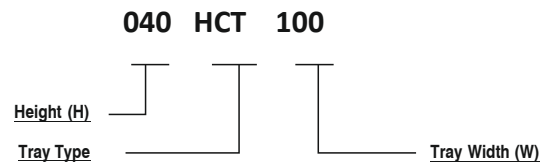



H=040, H=050, H=060 SINGLE LINE PERFORATED.

HCT CABLE TRAYS

Hot-Dip Galvanized (TS EN ISO 1461)

Description	H (mm)	W (mm)	T (mm)	Weight (kg/pcs)
040 HCT 050	40	50	1,2	1,136
040 HCT 100	40	100	1,2	1,562
040 HCT 150	40	150	1,2	1,984
040 HCT 200	40	200	1,2	2,41
040 HCT 250	40	250	1,2	2,835
040 HCT 300	40	300	1,2	3,258
050 HCT 100	50	100	1,2	1,848
050 HCT 150	50	150	1,2	2,192
050 HCT 200	50	200	1,2	2,617
050 HCT 250	50	250	1,2	3,042
050 HCT 300	50	300	1,2	3,466
060 HCT 100	60	100	1,2	1,976
060 HCT 150	60	150	1,2	2,399
060 HCT 200	60	200	1,2	2,825
060 HCT 250	60	250	1,2	3,248
060 HCT 300	60	300	1,2	3,673

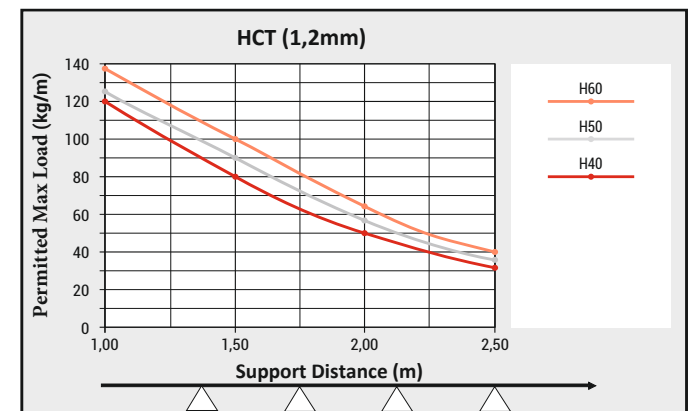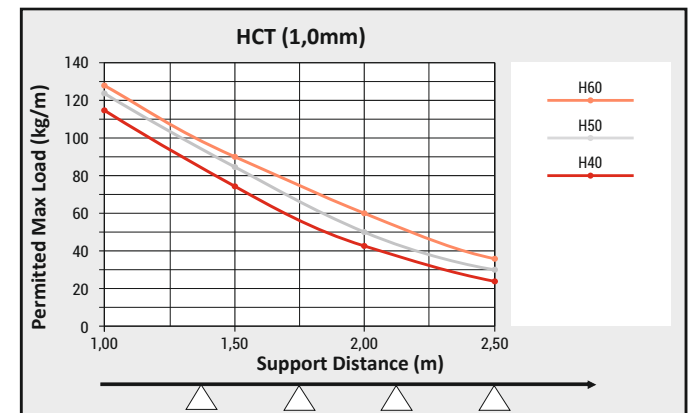

Standart length is 3m.

HCT CABLE TRAYS;
USED WITH HMS SERIES MODULES.PLEASE
CHECK ACCESSORIES PAGE.

Please inform order code.

Product weights may vary $\pm$ % 10.

HCT CABLE TRAYS

Hot-Dip Galvanized (TS EN ISO 1461)

Description	H (mm)	W (mm)	T (mm)	Weight (kg/pcs)
040 HCT 050	40	50	1,5	1,41
040 HCT 100	40	100	1,5	1,94
040 HCT 150	40	150	1,5	2,47
040 HCT 200	40	200	1,5	3
040 HCT 250	40	250	1,5	3,53
040 HCT 300	40	300	1,5	4,06
040 HCT 400	40	400	1,5	5,122
040 HCT 500	40	500	1,5	6,182
040 HCT 600	40	600	1,5	7,244
050 HCT 050	50	50	1,5	1,667
050 HCT 100	50	100	1,5	2,198
050 HCT 150	50	150	1,5	2,727
050 HCT 200	50	200	1,5	3,258
050 HCT 250	50	250	1,5	3,79
050 HCT 300	50	300	1,5	4,32
050 HCT 400	50	400	1,5	5,38
050 HCT 500	50	500	1,5	6,442
050 HCT 600	50	600	1,5	7,503
060 HCT 050	60	100	1,5	2,46
060 HCT 150	60	150	1,5	3
060 HCT 200	60	200	1,5	3,52
060 HCT 250	60	250	1,5	4,05
060 HCT 300	60	300	1,5	4,58
060 HCT 400	60	400	1,5	5,64
060 HCT 500	60	500	1,5	6,7
060 HCT 600	60	600	1,5	7,762

HCT CABLE TRAYS

Hot-Dip Galvanized (TS EN ISO 1461)

Description	H (mm)	W (mm)	T (mm)	Weight (kg/pcs)
040 HCT 050	40	50	2	1,849
040 HCT 100	40	100	2	2,558
040 HCT 150	40	150	2	3,263
040 HCT 200	40	200	2	3,971
040 HCT 250	40	250	2	4,678
040 HCT 300	40	300	2	5,386
040 HCT 400	40	400	2	6,8
040 HCT 500	40	500	2	8,22
040 HCT 600	40	600	2	9,63
050 HCT 050	50	50	2	2,195
050 HCT 100	50	100	2	2,903
050 HCT 150	50	150	2	3,608
050 HCT 200	50	200	2	4,316
050 HCT 250	50	250	2	5,024
050 HCT 300	50	300	2	5,731
050 HCT 400	50	400	2	7,146
050 HCT 500	50	500	2	8,56
050 HCT 600	50	600	2	9,976
060 HCT 050	60	100	2	3,248
060 HCT 150	60	150	2	3,953
060 HCT 200	60	200	2	4,662
060 HCT 250	60	250	2	5,369
060 HCT 300	60	300	2	6,076
060 HCT 400	60	400	2	7,5
060 HCT 500	60	500	2	8,91
060 HCT 600	60	600	2	10,32


HCT CONNECTION PART

Hot-Dip Galvanized (TS EN ISO 1461)


Description	H (mm)	T (mm)	Weight (kg/pcs)
040 HCT 050	40-50-60	1,5	0,146
040 HCT 100	40-50-60	2	0,191






CABLE TRAY

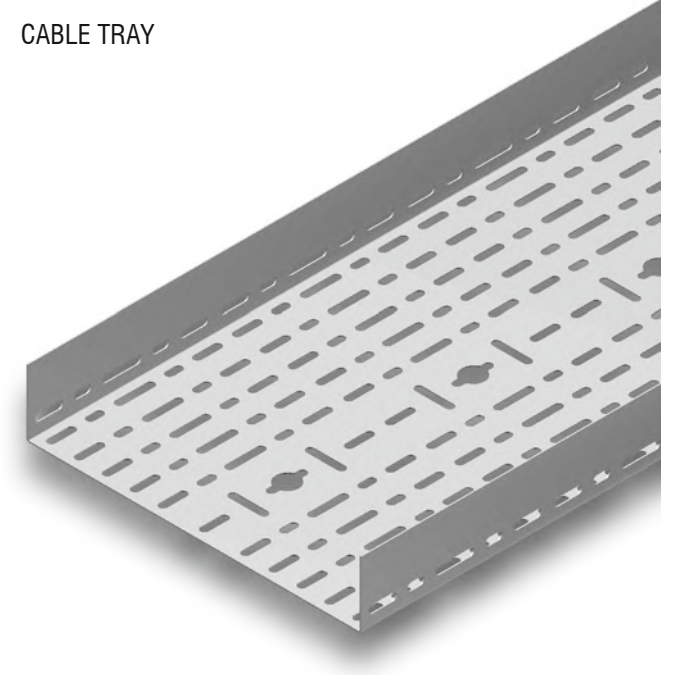

H=040, H=050, H=060 SINGLE LINE PERFORATED.



040 HCT 100

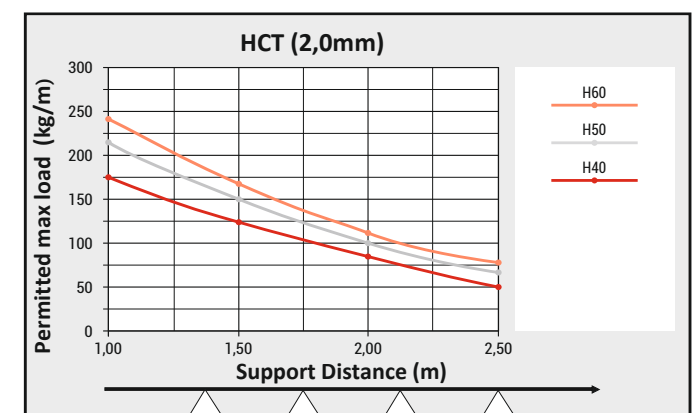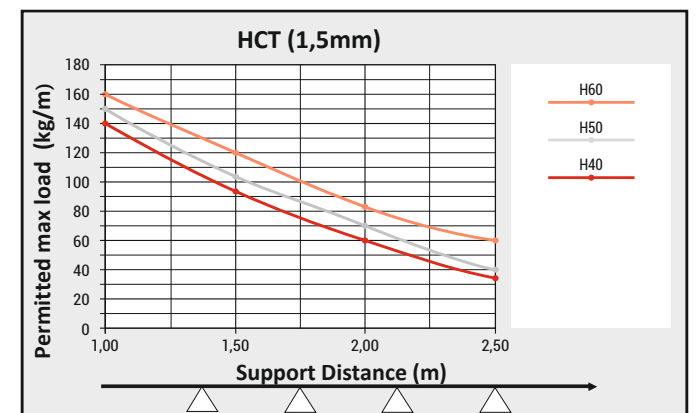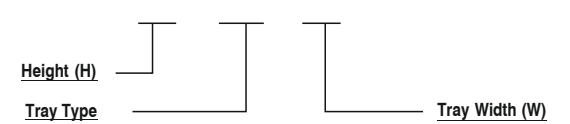

Standart length is 3m.

Please inform order code.

Product weights may vary $\pm$ % 10.

HCT-B CABLE TRAYS






Hot-Dip Galvanized (TS EN ISO 1461)

Description	H (mm)	W (mm)	T (mm)	Weight (kg/pcs)
040 HCT-B 050	40	50	1	1,073
040 HCT-B 100	40	100	1	1,427
040 HCT-B 150	40	150	1	1,781
040 HCT-B 200	40	200	1	2,134
050 HCT-B 100	50	100	1	1,6
050 HCT-B 150	50	150	1	1,953
050 HCT-B 200	50	200	1	2,307
060 HCT-B 100	60	100	1	1,773
060 HCT-B 150	60	150	1	2,126
060 HCT-B 200	60	200	1	2,479

HCT-B CABLE TRAYS

Hot-Dip Galvanized (TS EN ISO 1461)

Description	H (mm)	W (mm)	T (mm)	Weight (kg/pcs)
040 HCT-B 050	40	50	1,2	1,282
040 HCT-B 100	40	100	1,2	1,707
040 HCT-B 150	40	150	1,2	2,131
040 HCT-B 200	40	200	1,2	2,555
040 HCT-B 250	40	250	1,2	2,98
040 HCT-B 300	40	300	1,2	3,404
050 HCT-B 100	50	100	1,2	1,915
050 HCT-B 150	50	150	1,2	2,339
050 HCT-B 200	50	200	1,2	2,762
050 HCT-B 250	50	250	1,2	3,187
050 HCT-B 300	50	300	1,2	3,612
060 HCT-B 100	60	100	1,2	2,122
060 HCT-B 150	60	150	1,2	2,546
060 HCT-B 200	60	200	1,2	2,97
060 HCT-B 250	60	250	1,2	3,395
060 HCT-B 300	60	300	1,2	3,819

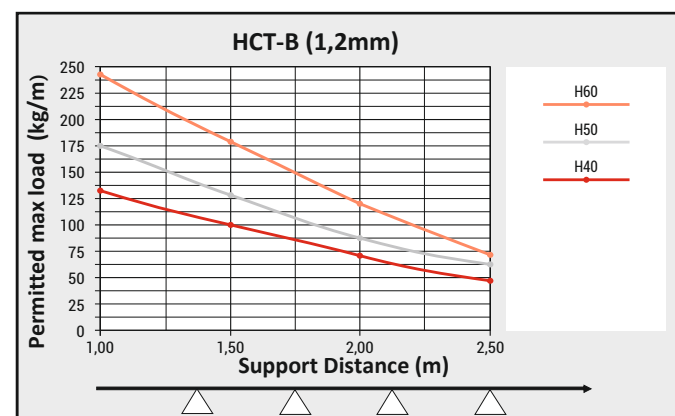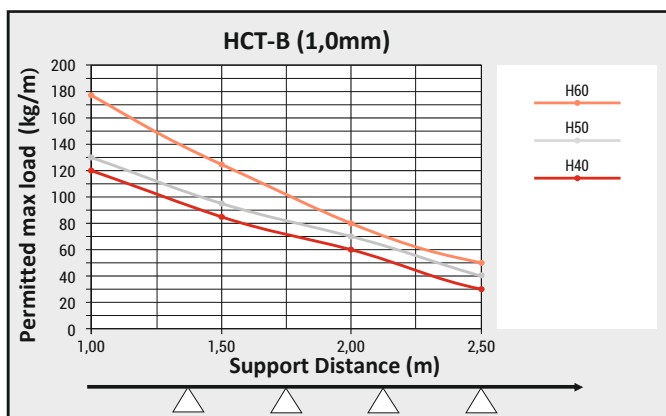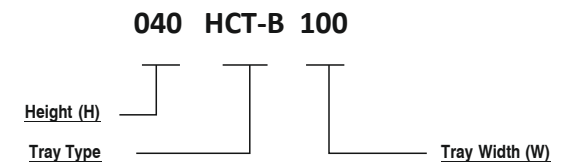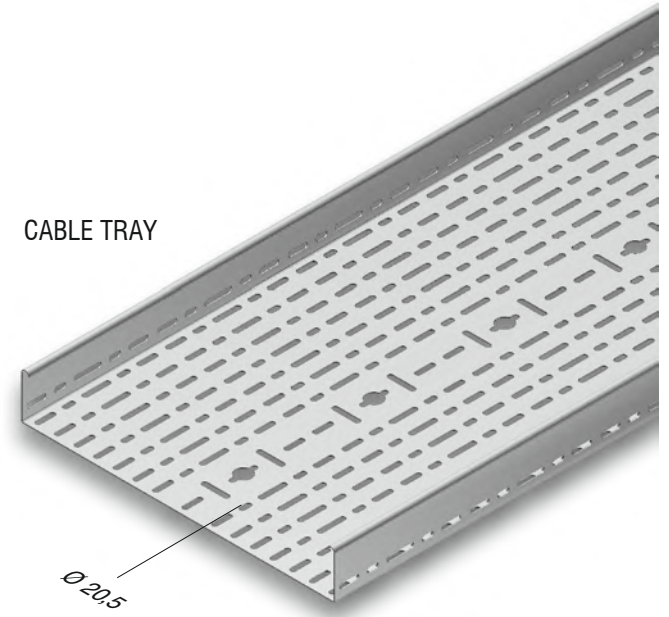

Standart length is 3m.


Please inform order code.

Product weights may vary $\pm$ % 10.

HCT-I CABLE TRAYS

Hot-Dip Galvanized (TS EN ISO 1461)

Description	H (mm)	W (mm)	T (mm)	Weight (kg/pcs)
040 HCT-I 050	40	50	1	1,209
040 HCT-I 100	40	100	1	1,64
040 HCT-I 150	40	150	1	2,072
040 HCT-I 200	40	200	1	2,504
050 HCT-I 100	50	100	1	1,813
050 HCT-I 150	50	150	1	2,245
050 HCT-I 200	50	200	1	2,677
060 HCT-I 100	60	100	1	1,986
060 HCT-I 150	60	150	1	2,418
060 HCT-I 200	60	200	1	2,849




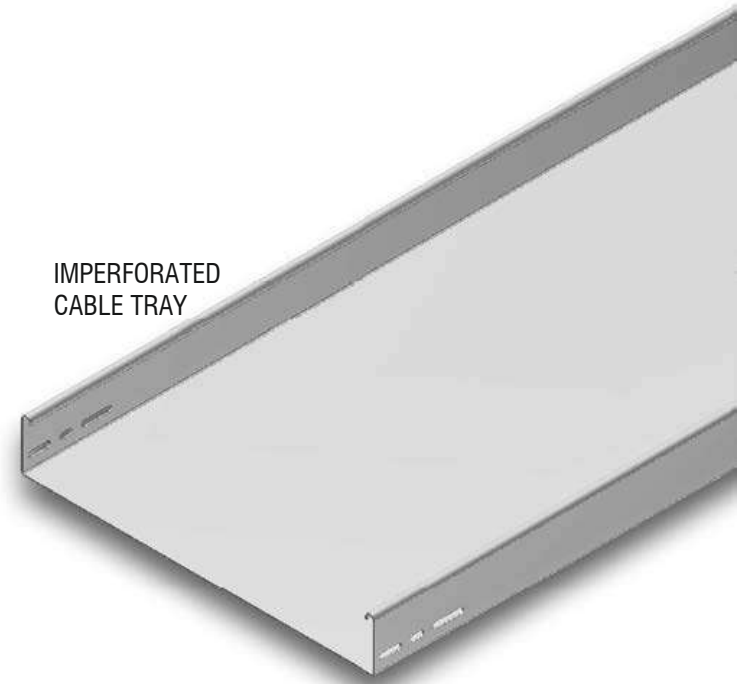


IMPERFORATED
CABLE TRAY

HCT-I CABLE TRAYS

Hot-Dip Galvanized (TS EN ISO 1461)

Description	H (mm)	W (mm)	T (mm)	Weight (kg/pcs)
040 HCT-I 050	40	50	1,2	1,445
040 HCT-I 100	40	100	1,2	1,963
040 HCT-I 150	40	150	1,2	2,481
040 HCT-I 200	40	200	1,2	2,999
040 HCT-I 250	40	250	1,2	3,517
040 HCT-I 300	40	300	1,2	4,036
050 HCT-I 100	50	100	1,2	2,17
050 HCT-I 150	50	150	1,2	2,688
050 HCT-I 200	50	200	1,2	3,207
050 HCT-I 250	50	250	1,2	3,746
050 HCT-I 300	50	300	1,2	4,243
060 HCT-I 100	60	100	1,2	2,377
060 HCT-I 150	60	150	1,2	2,896
060 HCT-I 200	60	200	1,2	3,414
060 HCT-I 250	60	250	1,2	3,932
060 HCT-I 300	60	300	1,2	4,45

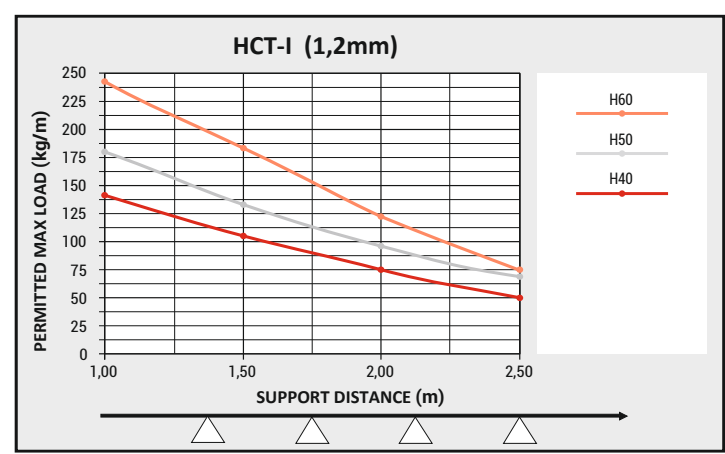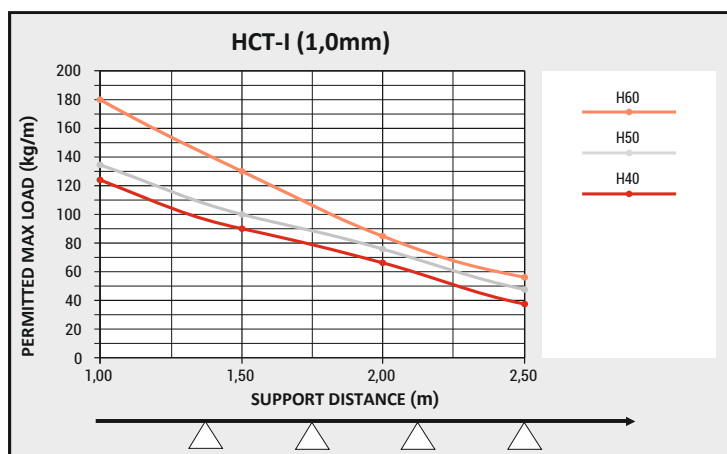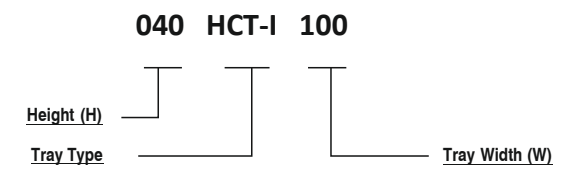
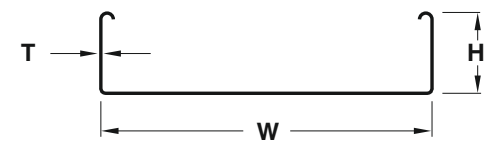


Please inform order code.

Product weights may vary $\pm$ % 10.



HCT-CM CONNECTION MODULE
Hot-Dip Galvanized (TS EN ISO 1461)

H:40mm to 150 mm available
T:1,2 /1,5 /2 mm

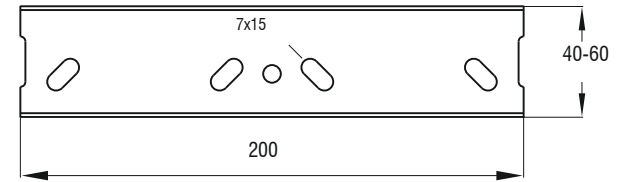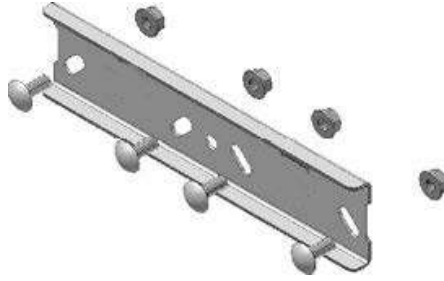



HCT-HM HORIZONTAL CONNECTION MODULE (45°)
Hot-Dip Galvanized (TS EN ISO 1461)

H:40mm to 150 mm available
T:1,2 /1,5 /2 mm
W:50mm to 600 mm available

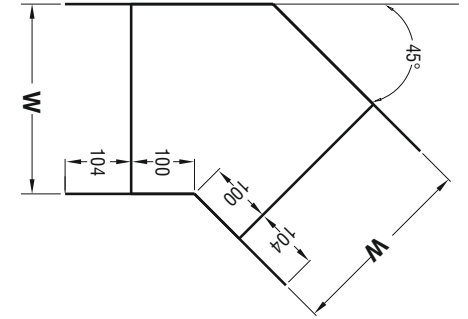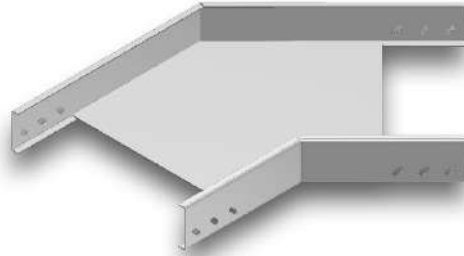



HCT-HM HORIZONTAL CONNECTION MODULE (90°)
Hot-Dip Galvanized (TS EN ISO 1461)

H:40mm to 150 mm available
T:1,2 /1,5 /2 mm
W:50mm to 600 mm available

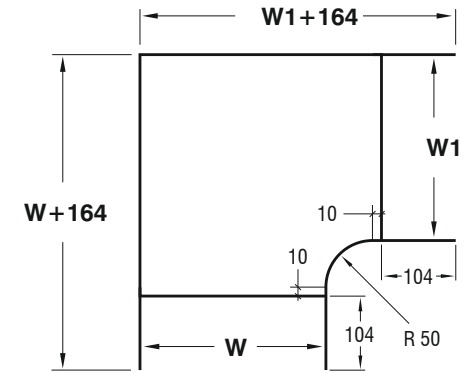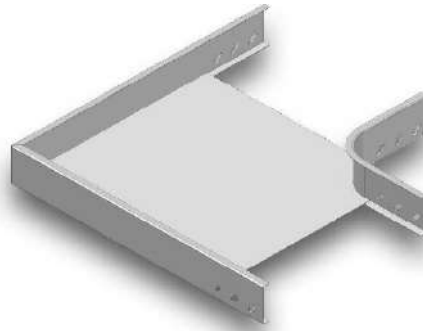



HCT-TM CONNECTION MODULE
Hot-Dip Galvanized (TS EN ISO 1461)

H:40mm to 150 mm available
T:1,2 /1,5 /2 mm
W:50mm to 600 mm available

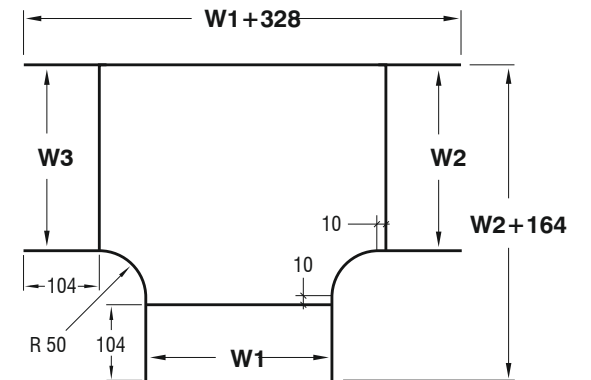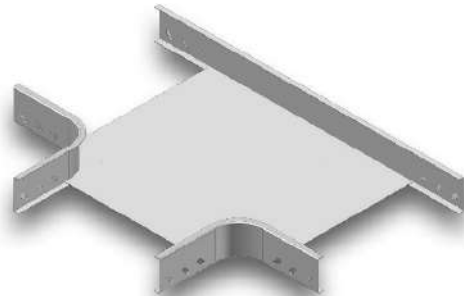

HCT-QM QUADRUPLE CONNECTION MODULE
Hot-Dip Galvanized (TS EN ISO 1461)



H:40mm to 150 mm available
T:1,2 /1,5 /2 mm
W:50mm to 600 mm available

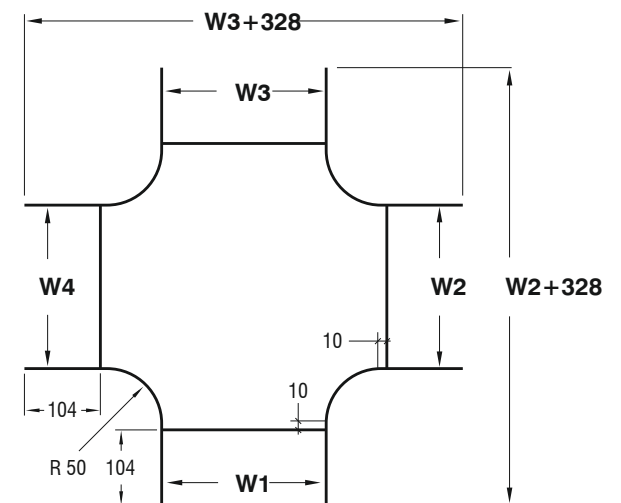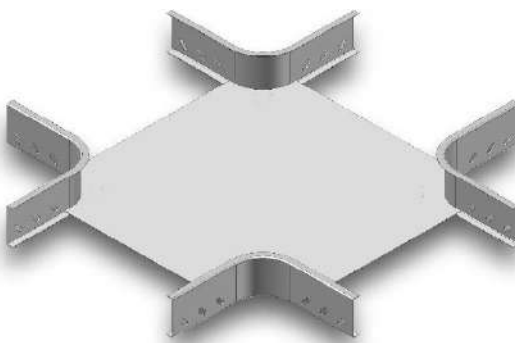

HCT-LR/RR REDUCTION CONNECTION MODULES
Hot-Dip Galvanized (TS EN ISO 1461)

H:40mm to 150 mm available
T:1,2 /1,5 /2 mm
W:50mm to 600 mm available







M6x12 mm BOLTS COULD BE USED FOR THE CONNECTION PARTS.

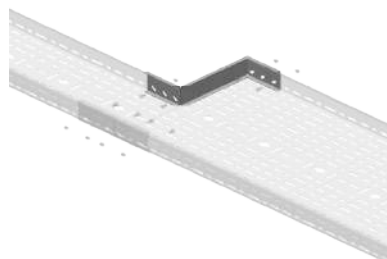

HCL CABLE LADDER

Hot-Dip Galvanized (TS EN ISO 1461)

Description	H (mm)	W (mm)	T (mm)	Weight (kg/pcs)
040 HCL 100	40	100	1,2	1,628
040 HCL 150	40	150	1,2	1,84
040 HCL 200	40	200	1,2	2,053
050 HCL 100	50	100	1,2	1,831
050 HCL 150	50	150	1,2	2,043
050 HCL 200	50	200	1,2	2,256
060 HCL 100	60	100	1,2	2,035
060 HCL 150	60	150	1,2	2,247
060 HCL 200	60	200	1,2	2,46

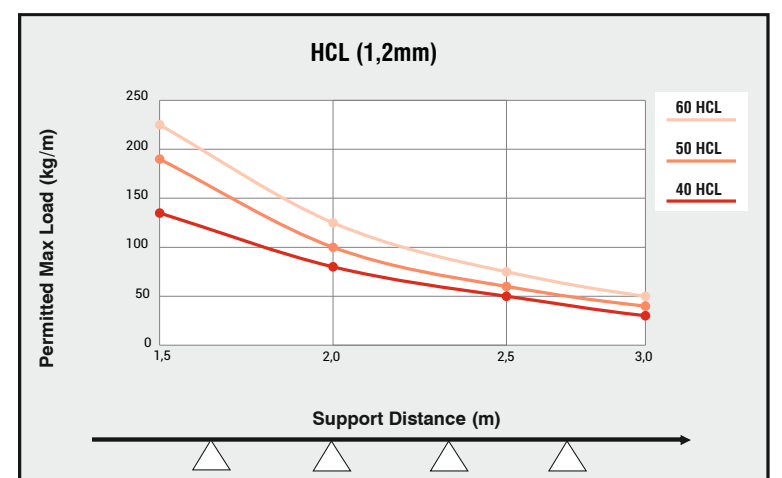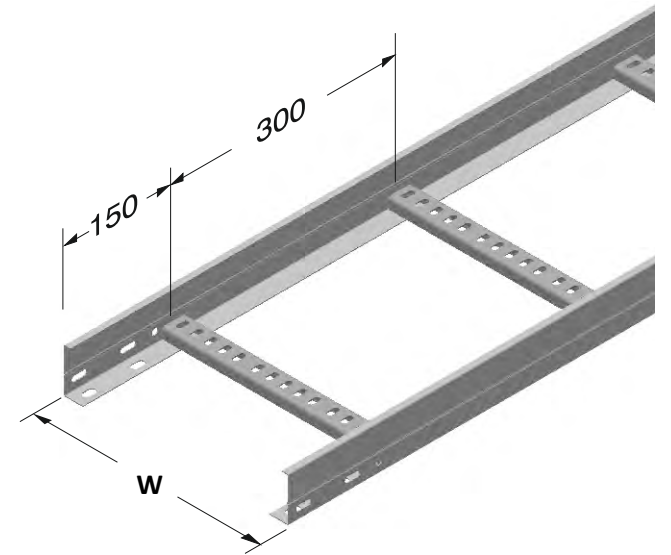

Please inform order code.




Standart Length 3m

Product weights may vary $\pm$ % 10.

HCL CABLE LADDER

Hot-Dip Galvanized (TS EN ISO 1461)

Description	H (mm)	W (mm)	T (mm)	Weight (kg/pcs)
040 HCL 100	40	100	1,5	1,935
040 HCL 200	40	200	1,5	2,147
040 HCL 300	40	300	1,5	2,36
040 HCL 400	40	400	1,5	2,572
040 HCL 500	40	500	1,5	2,781
040 HCL 600	40	600	1,5	2,993
050 HCL 100	50	100	1,5	2,189
050 HCL 200	50	200	1,5	2,401
050 HCL 300	50	300	1,5	2,614
050 HCL 400	50	400	1,5	2,826
050 HCL 500	50	500	1,5	3,035
050 HCL 600	50	600	1,5	3,247
060 HCL 100	60	100	1,5	2,443
060 HCL 200	60	200	1,5	2,656
060 HCL 300	60	300	1,5	2,868
060 HCL 400	60	400	1,5	3,08
060 HCL 500	60	500	1,5	3,289
060 HCL 600	60	600	1,5	3,502
075 HCL 100	75	100	1,5	2,827
075 HCL 200	75	200	1,5	3,04
075 HCL 300	75	300	1,5	3,252
075 HCL 400	75	400	1,5	3,464
075 HCL 500	75	500	1,5	3,673
075 HCL 600	75	600	1,5	3,886
100 HCL 200	100	200	1,5	3,671
100 HCL 300	100	300	1,5	3,884
100 HCL 400	100	400	1,5	4,096
100 HCL 500	100	500	1,5	4,305
100 HCL 600	100	600	1,5	4,517

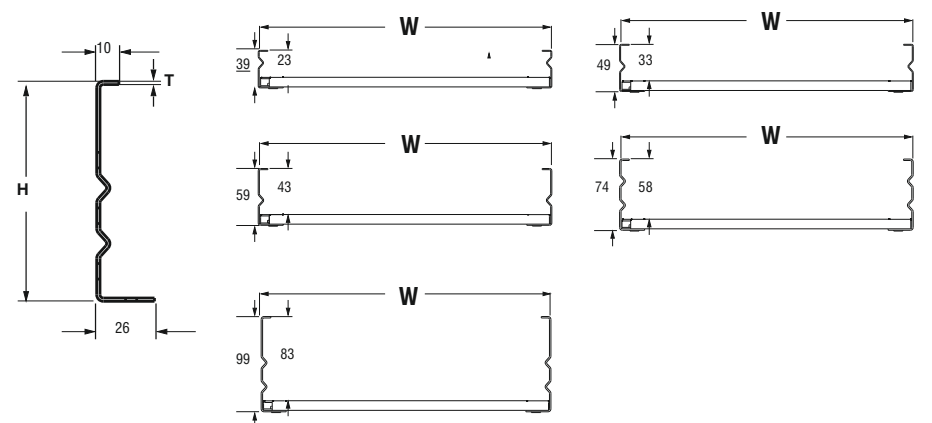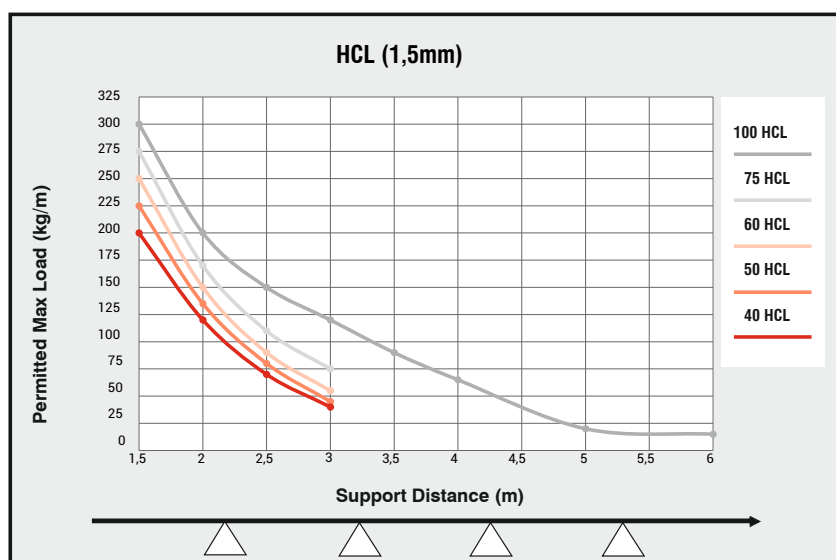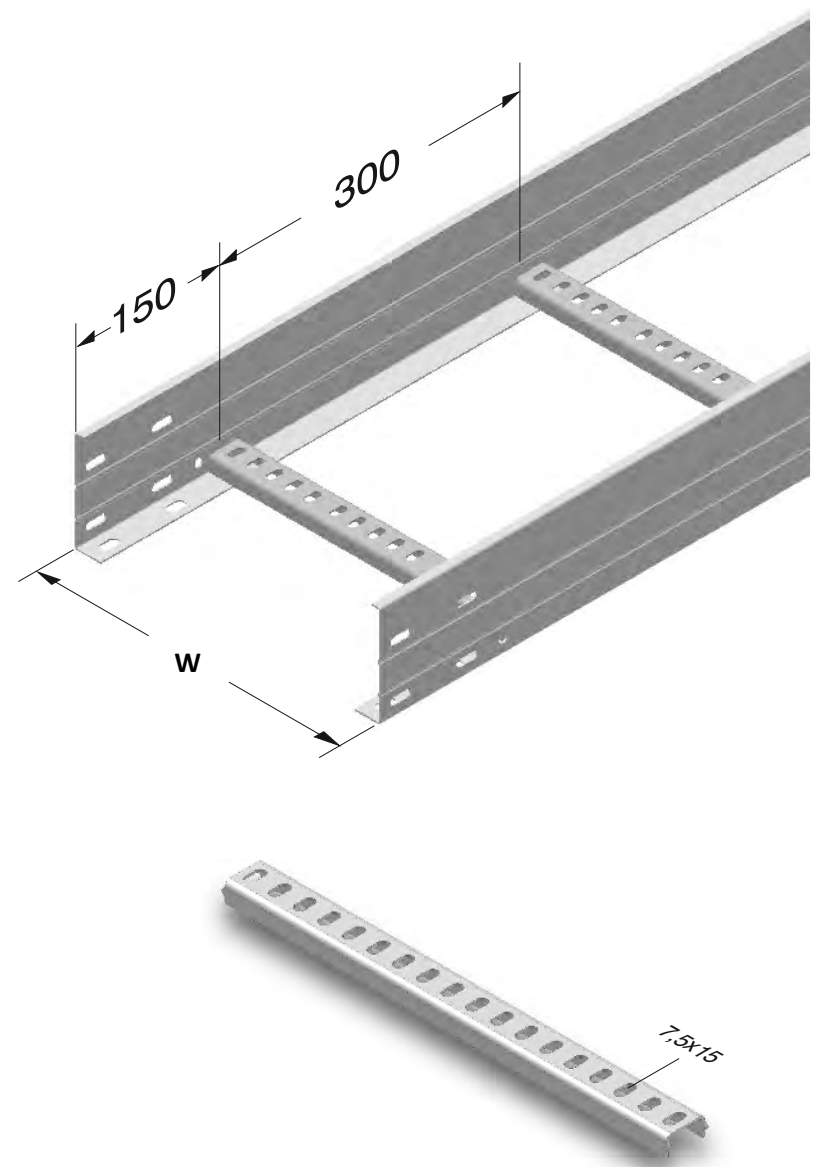

Please inform order code.

Standart Length 3m



Product weights may vary $\pm$ % 10.

HCL-CM CONNECTION MODULE

Hot-Dip Galvanized (TS EN ISO 1461)

H:40mm to 150 mm available

T:1,2 /1,5 /2 mm

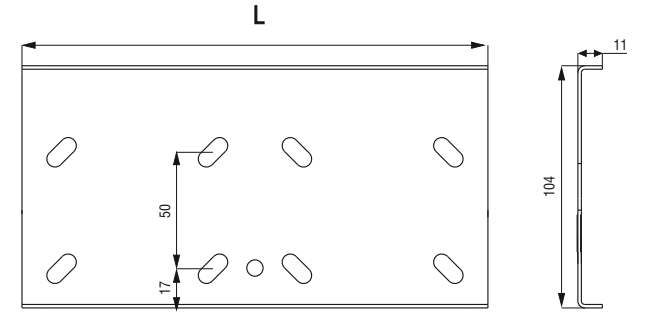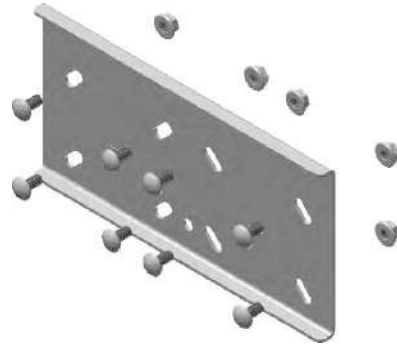



HCL-HM HORIZONTAL CONNECTION MODULE (45°)

Hot-Dip Galvanized (TS EN ISO 1461)

H:40mm to 150 mm available

T:1,2 /1,5 /2 mm

W:50mm to 600 mm available

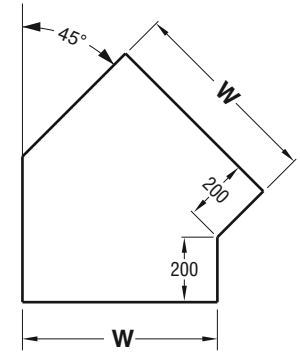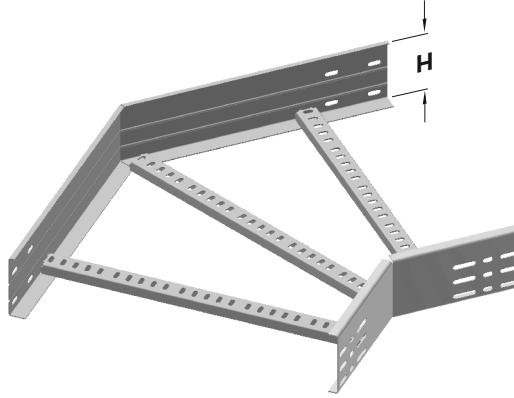



HCL-HM HORIZONTAL CONNECTION MODULE (90°)

Hot-Dip Galvanized (TS EN ISO 1461)

H:40mm to 150 mm available

T:1,2 /1,5 /2 mm

W:50mm to 600 mm available

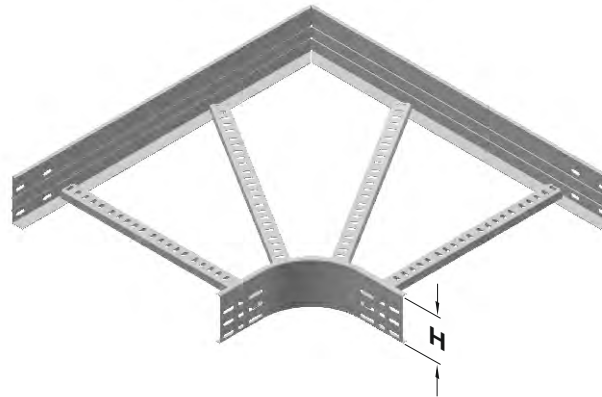



HCL-TM CONNECTION MODULE

Hot-Dip Galvanized (TS EN ISO 1461)

H:40mm to 150 mm available

T:1,2 /1,5 /2 mm

W:50mm to 600 mm available

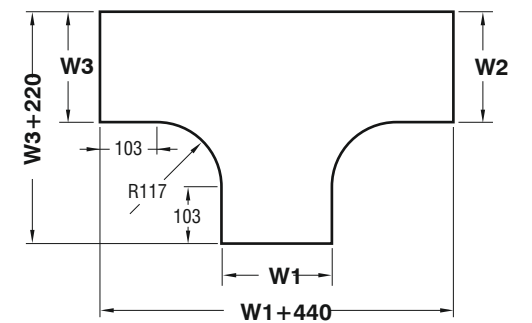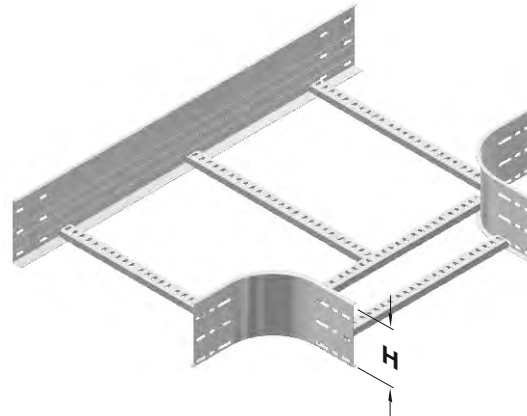



HCL-QM QUADRUPLE CONNECTION MODULE

Hot-Dip Galvanized (TS EN ISO 1461)

H:40mm to 150 mm available

T:1,2 /1,5 /2 mm

W:50mm to 600 mm available

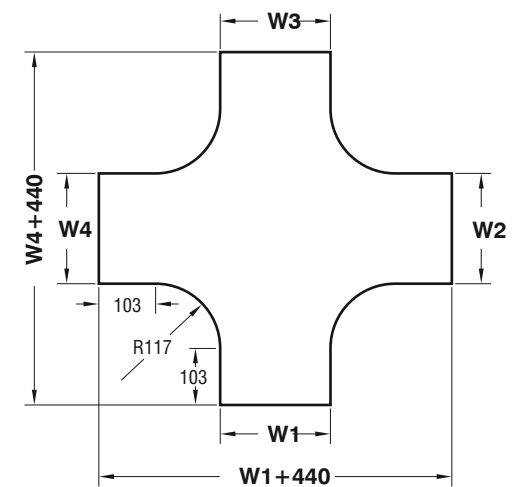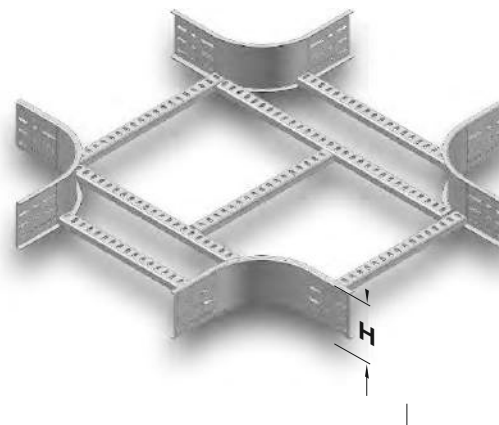

Please inform order code.

Standart Length 3m

Product weights may vary $\pm$ % 10.