



4 W EMERGENCY LIGHTING LED LUMINAIRE

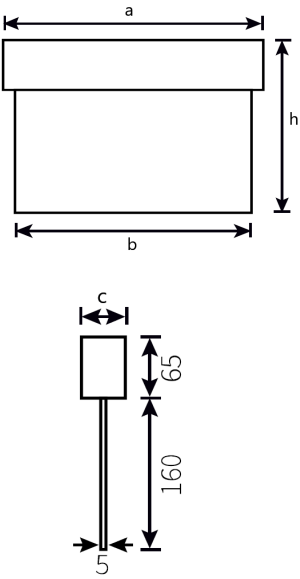

EML-01

Photometric Curve

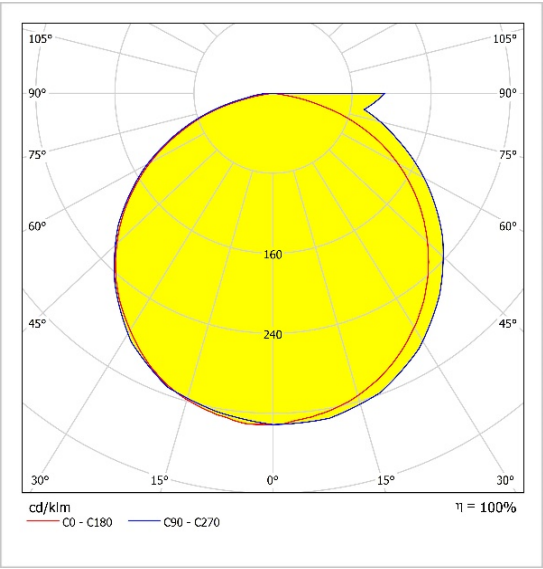

Dimensions (mm)

	a	b	h
Standard	330	310	225

Weight (gr)

Standard	362
----------	-----

PRODUCT DATA

Standard Features

Housing	: White polycarbonate housing
IP Grade	: IP40
Installation	: Surface mounted
Light Source	: Mid power LED
Emergency Kit Options	: 3 hours
Run Mode	: Maintained / non-maintained

Optical & Electrical Features

Power Consumption	: 4 W
Final Luminous Flux	: 237 lm
Efficacy	: 47.4 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos ϕ > 0,9
Correlated Color Temperature	: 6500K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range With Emergency Kit	: +5 °C/+40 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 50.000 hours @Ta= 40 °C

Optional Features

Electronic Control	: Self/Test, DALI
--------------------	-------------------



Order Code : 1031392
Product Code : EXIT 90 DEGREE MOUNTING KIT

Order Code : 1031390
Product Code : EXIT SURFACE MOUNTING KIT

