



Standard Features

Housing	: Aluminium profile housing
Diffuser	: Tempered glass with security film
Optic	: 30° / 60° / 90° / 30°x90° / 25°x105°
IP Grade	: IP66
Installation	: Surface mounted
Light Source	: LED

Optical & Electrical Features

Power	: 26W / 49W / 71W / 96W / 117W
Lumen	: 4165lm / 8238lm / 12349lm / 16112lm / 19986lm
Efficacy	: 160-170lm/W
Input Voltage	: 220-240 V
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Color Temperature	: 3000K / 4000K / 5700K / 6500K
CRI	: > 80

*Technical specifications have ± 10 tolerance.

Other Features & Conditions

Operating Temperature	: -20 °C/+45 °C
Operating Temp (ACK)	: +5 °C/+35 °C
Impact Resistance	: IK09**
Led Life Time - L70	: > 102.000 hours @Ta = 45 °C




Technical Drawing





Optional Features

Optic	: Asymmetric, Double Asymmetric
Emergency Kit Options	: 1-3 hours
DALI Option	: Yes





OPTICAL MODELS;



30° NARROW ANGLE

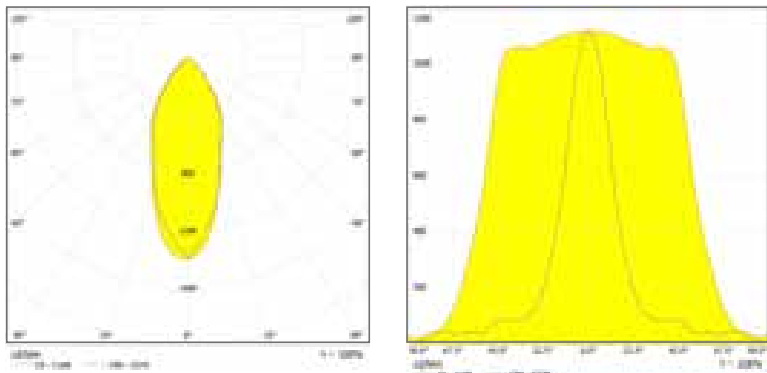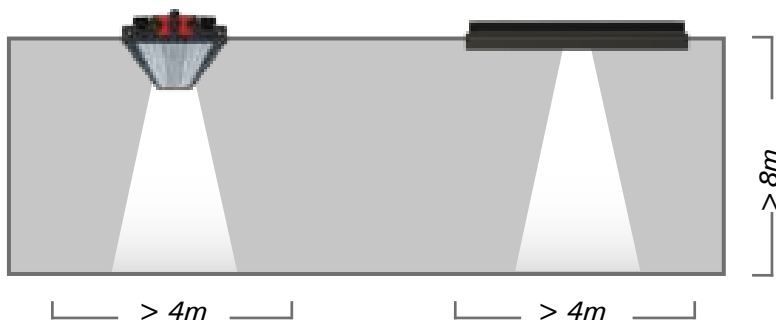



60° ARENA

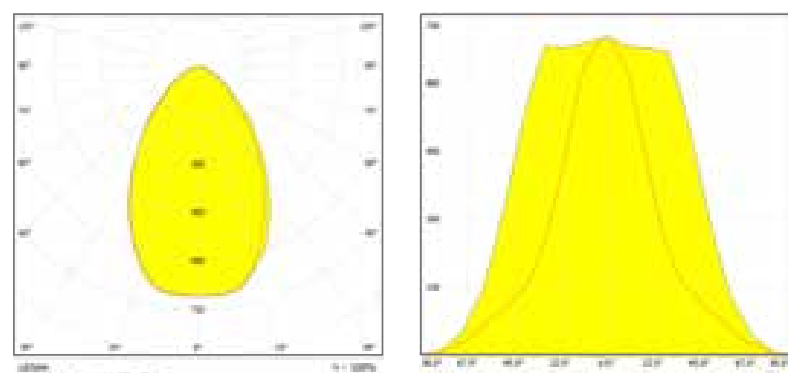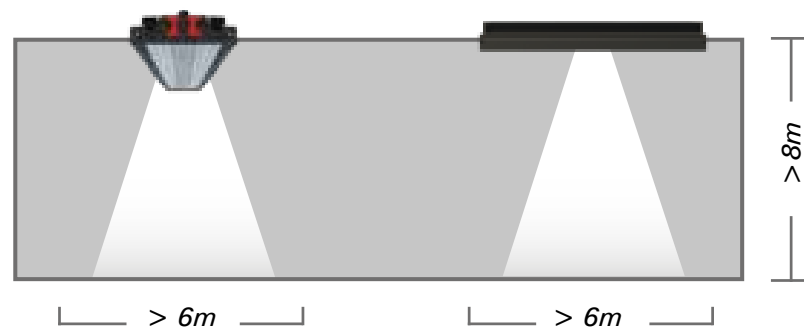

90° LOWBAY

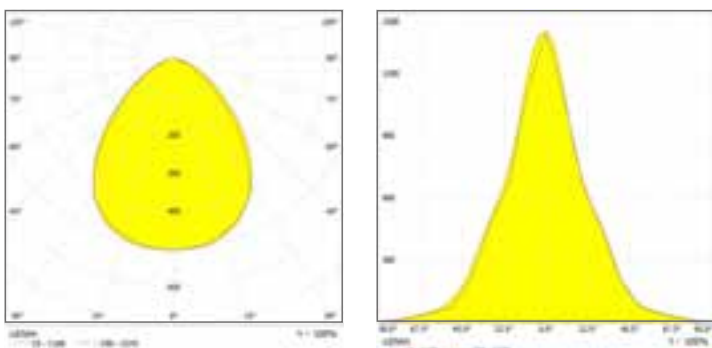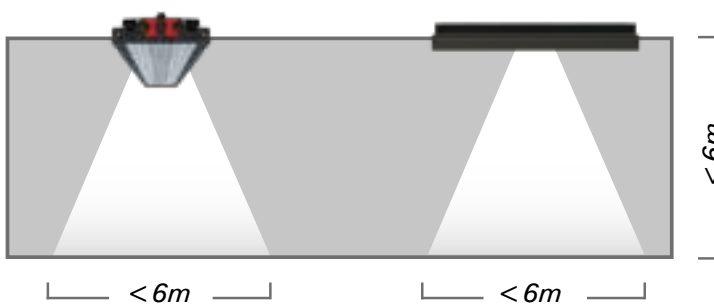

30° -90° RAF

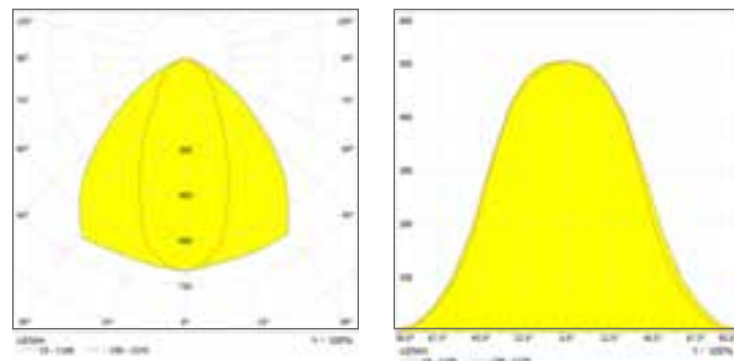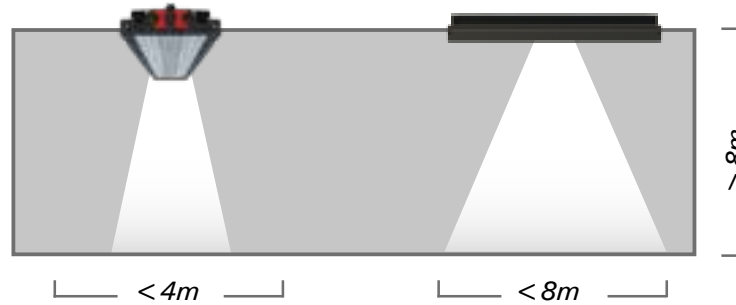

25° -105° RAF (NARROW ANGLE)

