


PDM SERIES

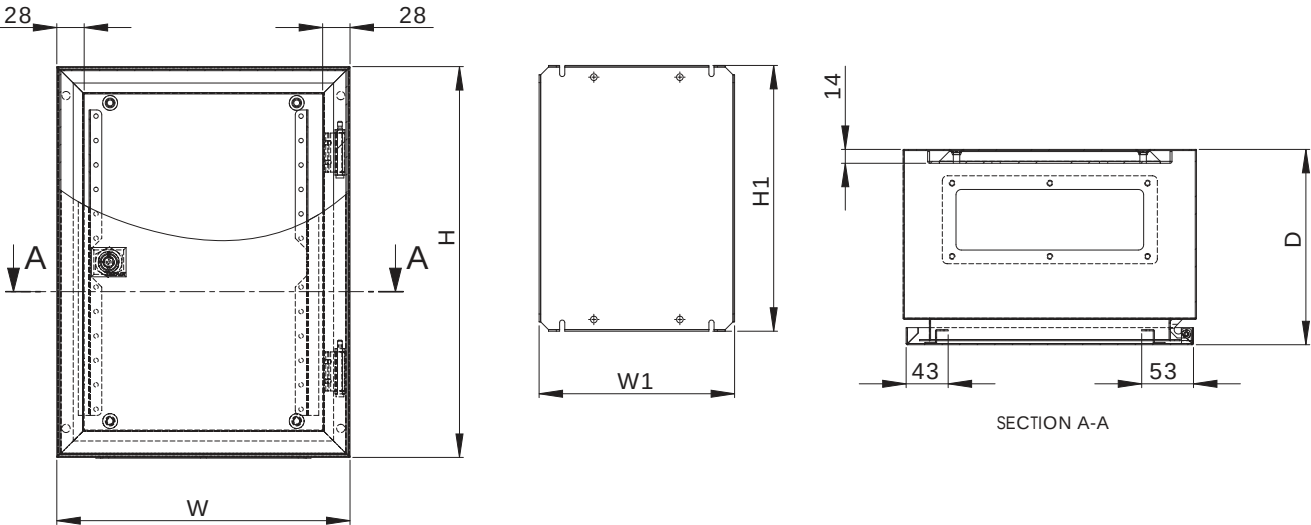

MaterialBody : 1,20 - 1,50 mm mild steel + RAL 7035 coating.

Mounting plate2,00 mm galvanized steel

Supply includes1 pcs body, 1 pcs door, 1 pcs mounting plate, 1 pcs gland plate

Door1,20-1,50 mm mild steel + RAL 7035 coating.

IP ProtectionSingle-door : IP 66,Double-door : IP 54

PDM series serve users in machine industries, automation and control systems.


The body structure is completely welded, water- and dustresistant, and designed with a sealing foam gasket Glaze applications can be performed upon request and the series is under UL certification.

ENCLOSURE WIDTH	W	W1
200	200	150
300	300	250
400	400	350
500	500	450
600	600	550
800	800	750
1000	1000	950

ENCLOSURE DEPTH	D
150	150
200	200
280	280

ENCLOSURE HEIGHT	H	H1
300	300	240
400	400	340
500	500	440
600	600	540
800	800	640
1000	1000	740

PDM SERIES

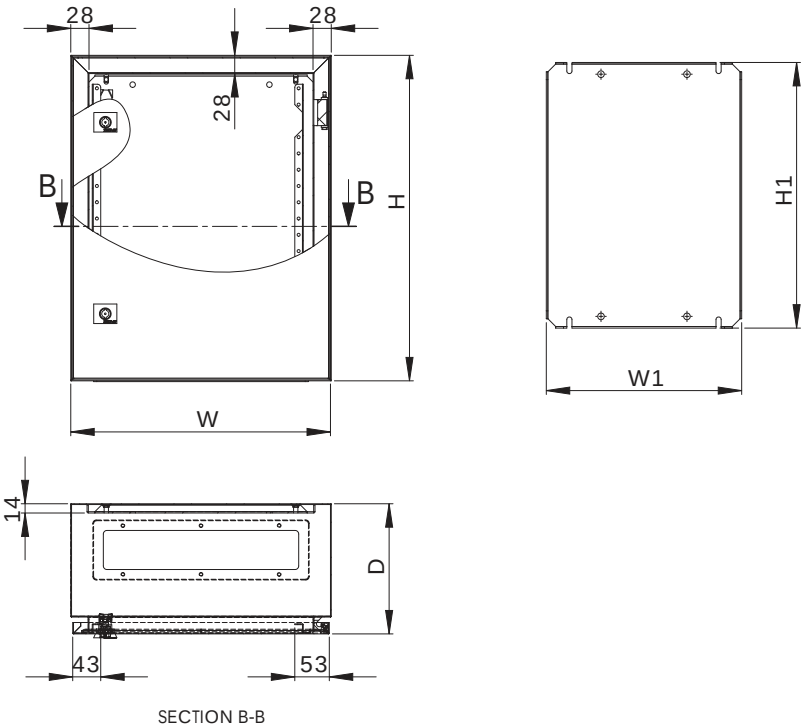


ENCLOSURE WIDTH	W	W1
200	200	150
300	300	250
400	400	350
500	500	450
600	600	550
800	800	750
1000	1000	950

ENCLOSURE DEPTH	D
150	150
200	200
280	280

ENCLOSURE HEIGHT	H	H1
300	300	240
400	400	340
500	500	440
600	600	540
800	800	640
1000	1000	740

PDM SERIES

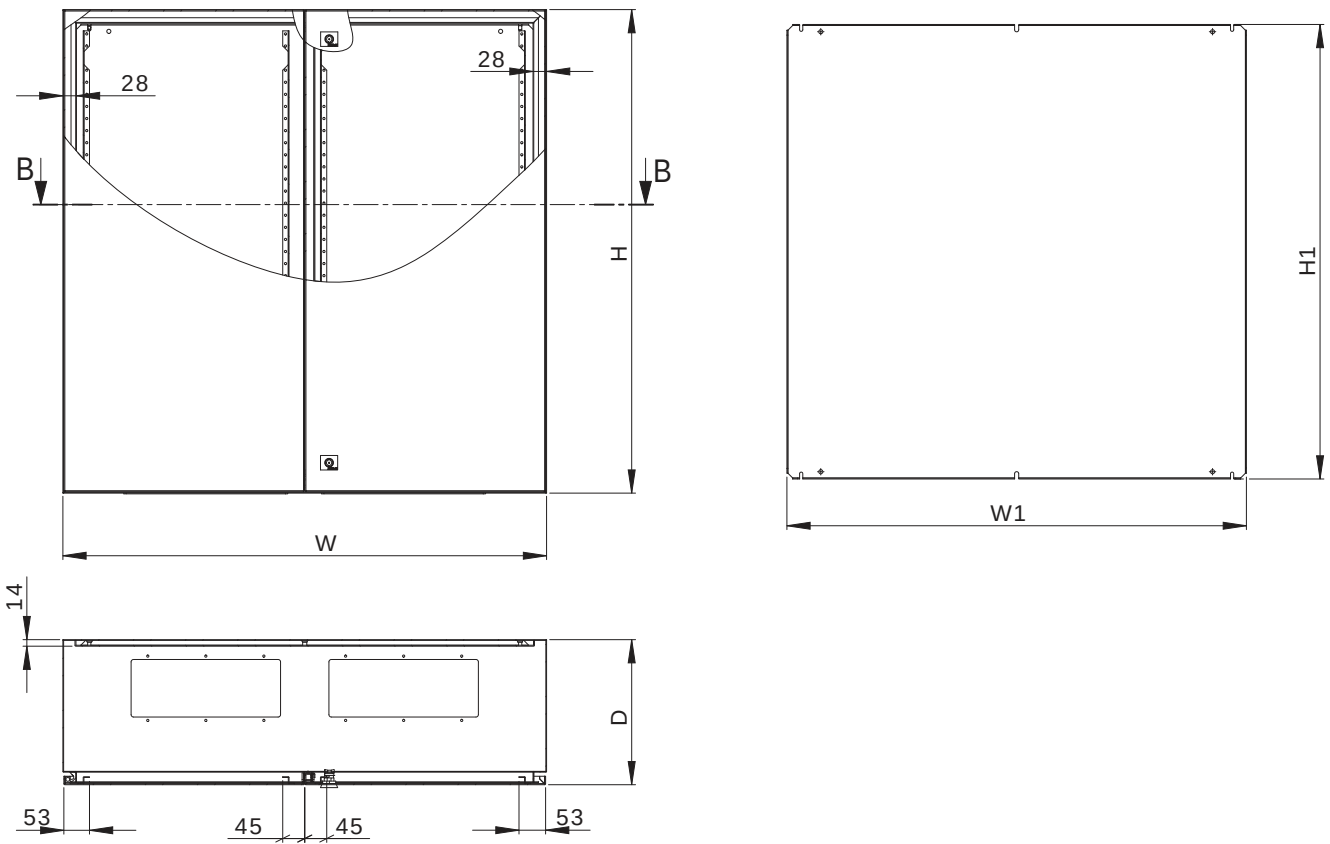


ENCLOSURE WIDTH	W	W1
200	200	150
300	300	250
400	400	350
500	500	450
600	600	550
800	800	750
1000	1000	950

ENCLOSURE DEPTH	D
150	150
200	200
280	280

ENCLOSURE HEIGHT	H	H1
300	300	240
400	400	340
500	500	440
600	600	540
800	800	640
1000	1000	740

PDM SERIES

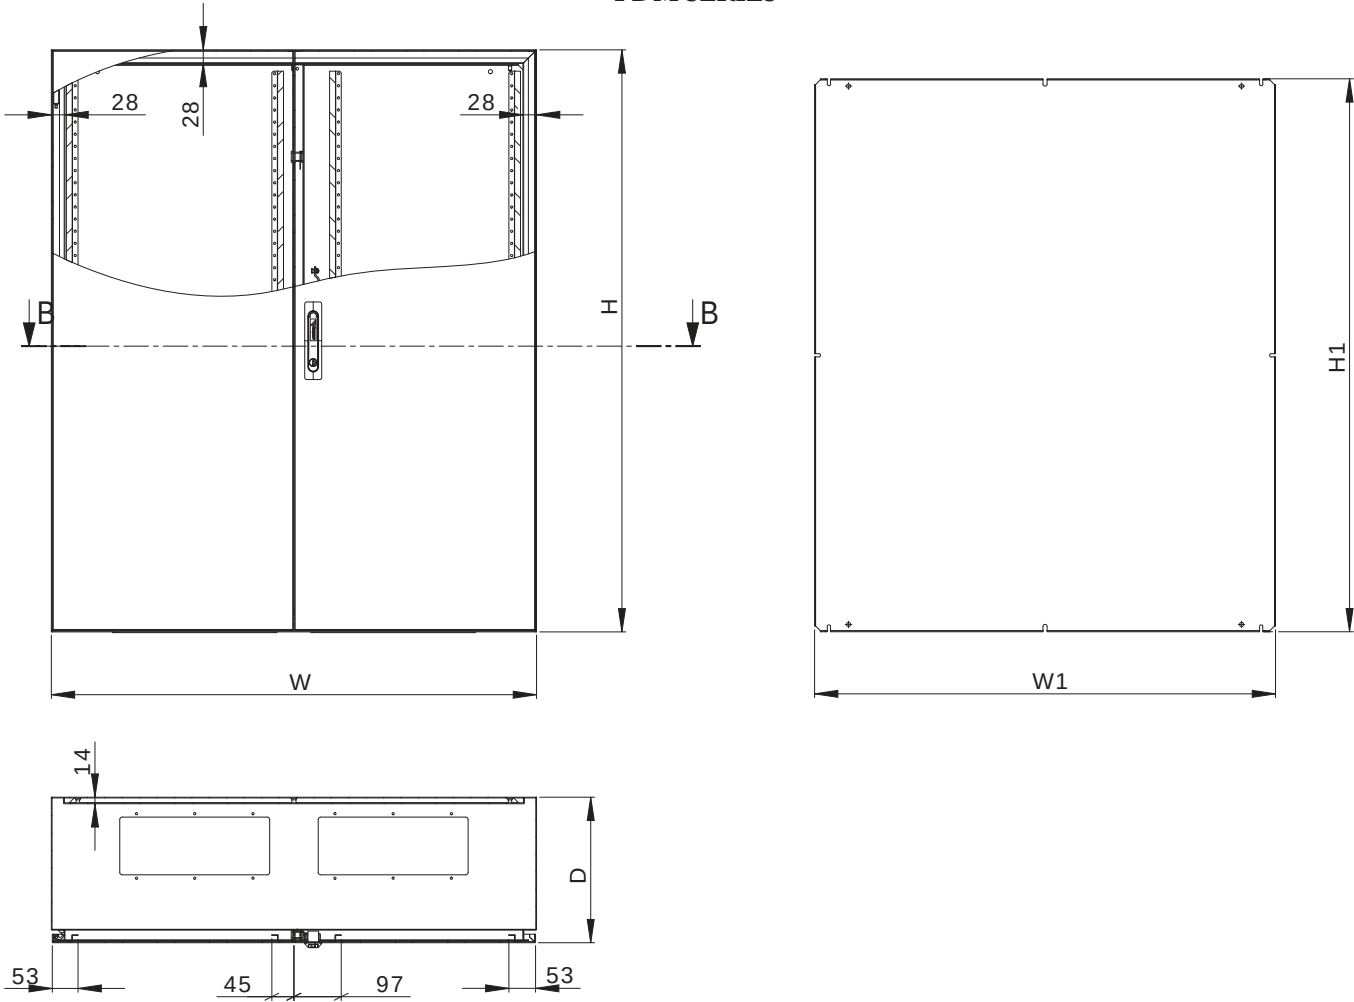


ENCLOSURE WIDTH	W	W1
200	200	150
300	300	250
400	400	350
500	500	450
600	600	550
800	800	750
1000	1000	950


ENCLOSURE DEPTH	D
150	150
200	200
280	280

ENCLOSURE HEIGHT	H	H1
300	300	240
400	400	340
500	500	440
600	600	540
800	800	740
1000	1000	940


PDM SERIES

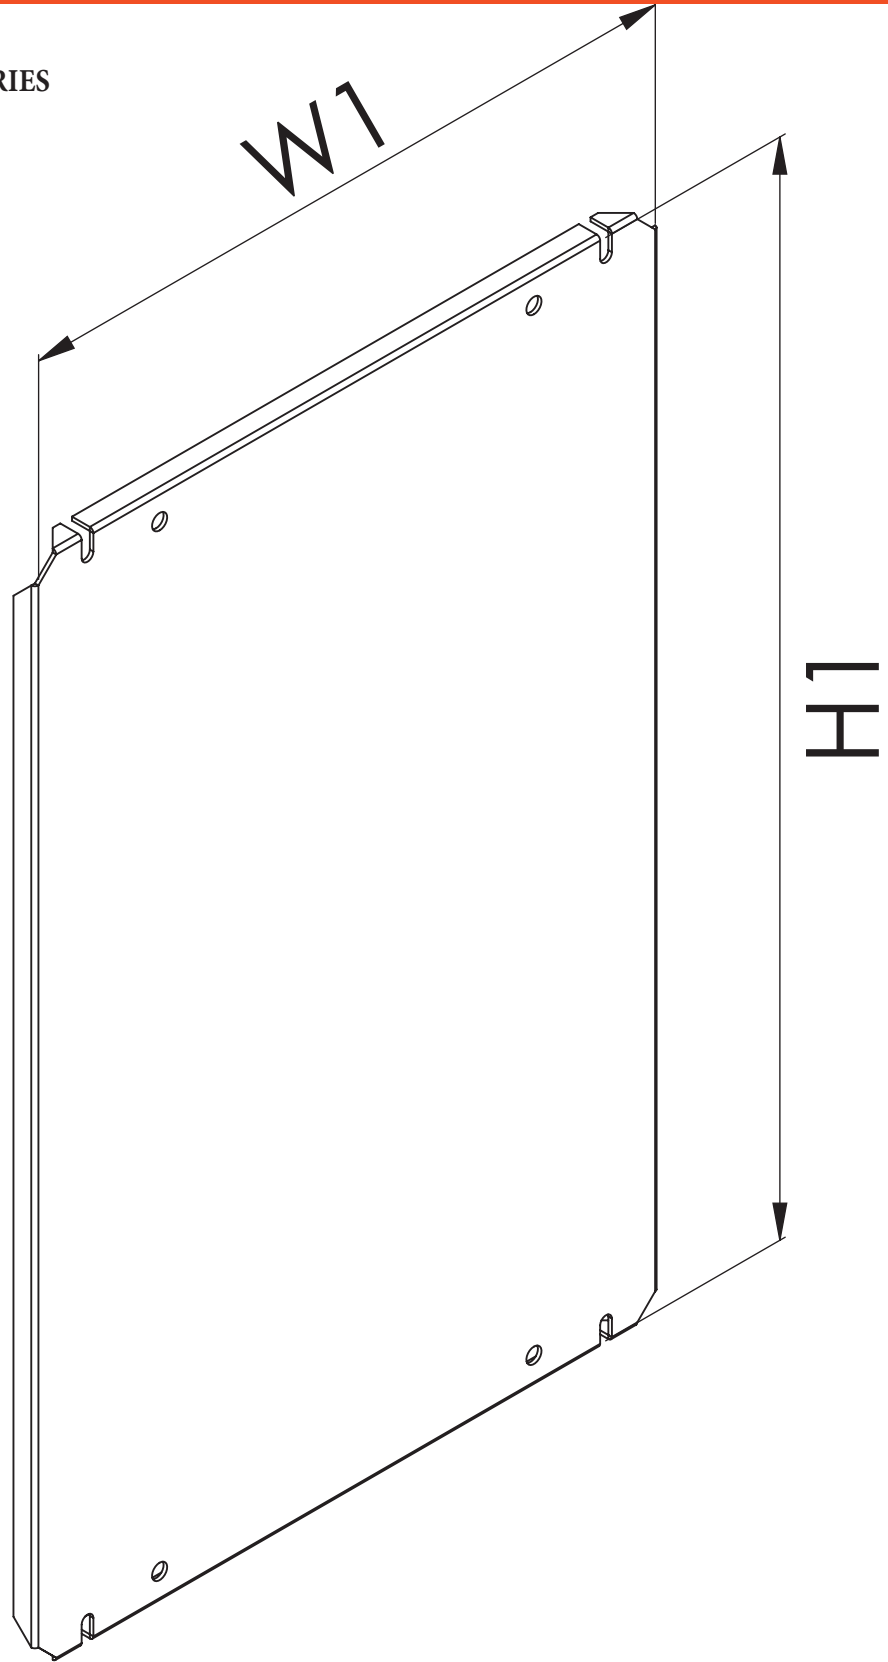


PDM SERIES

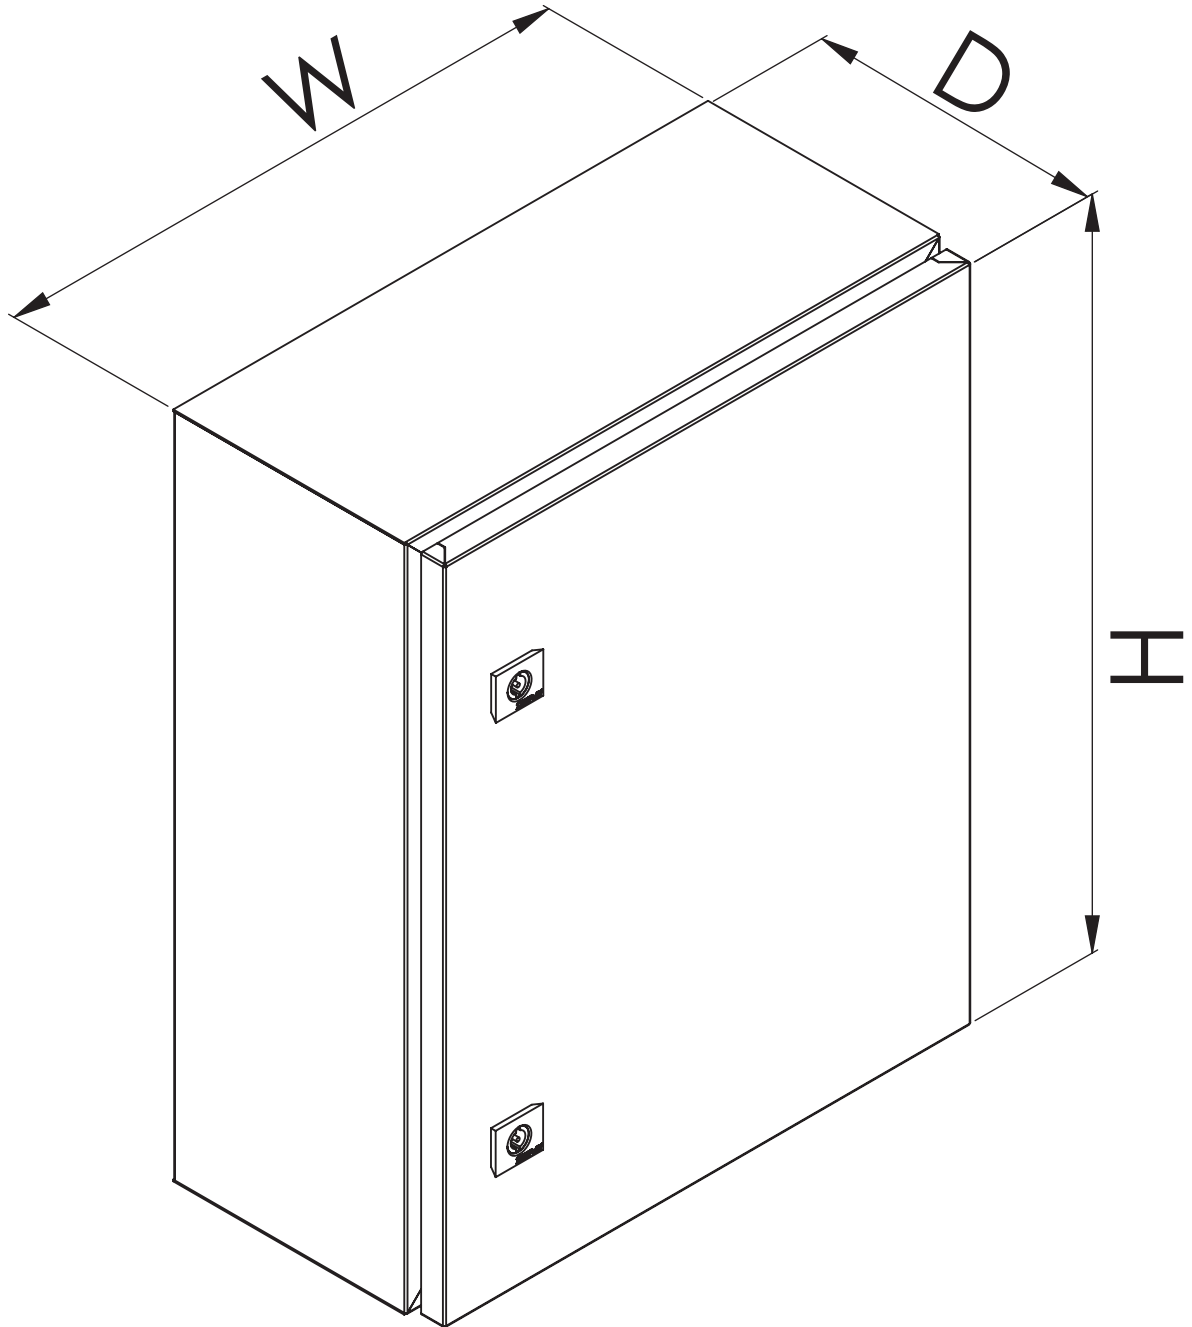


PDM SERIES

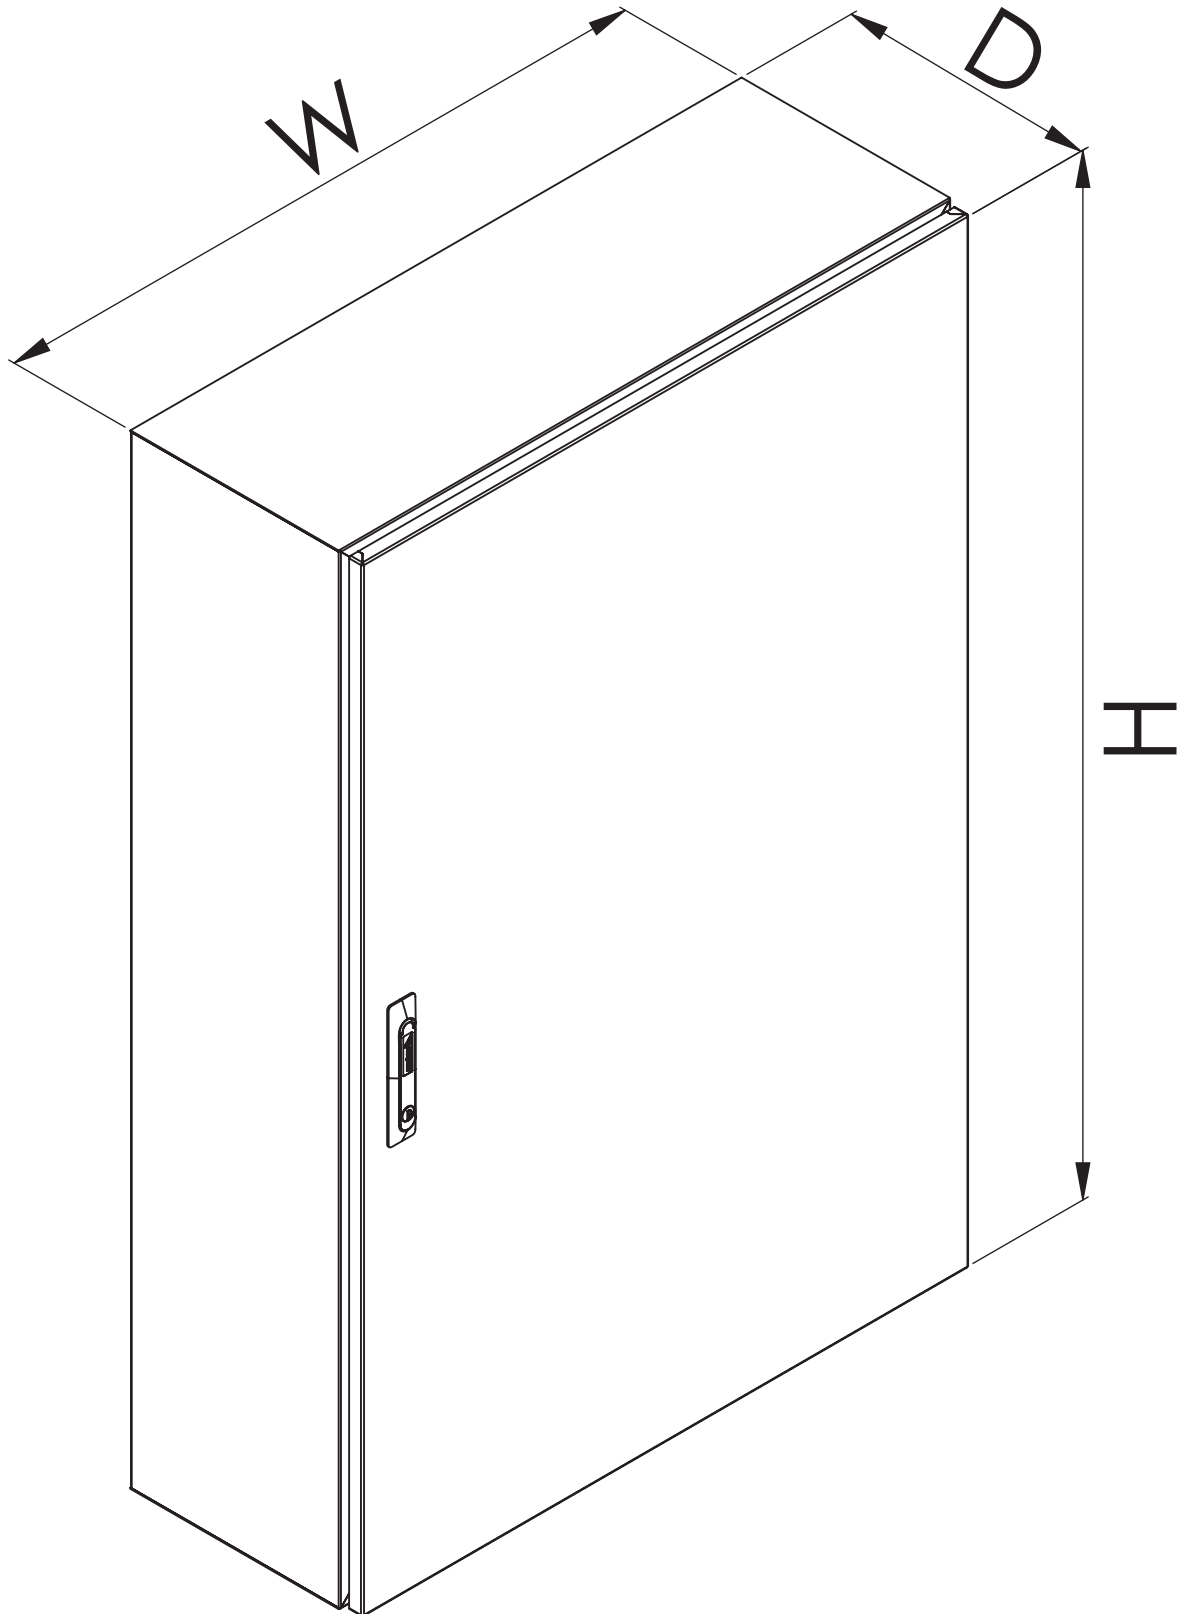


PDM SERIES

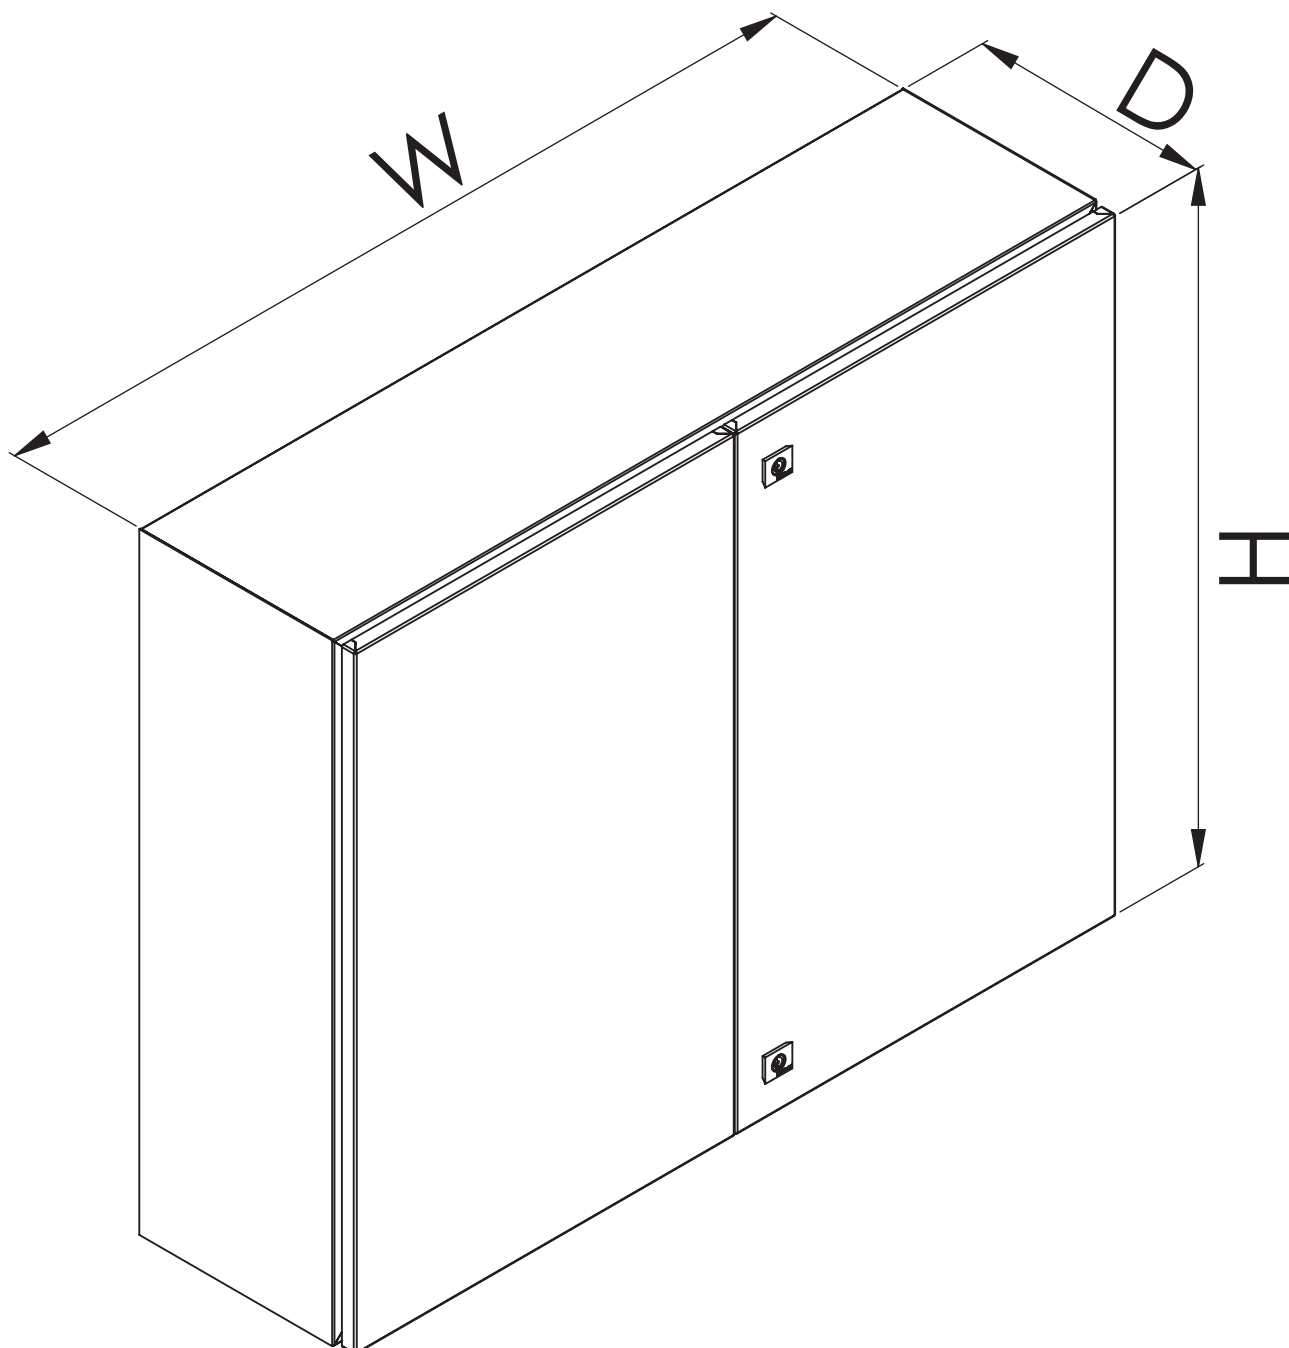

PDM SERIES

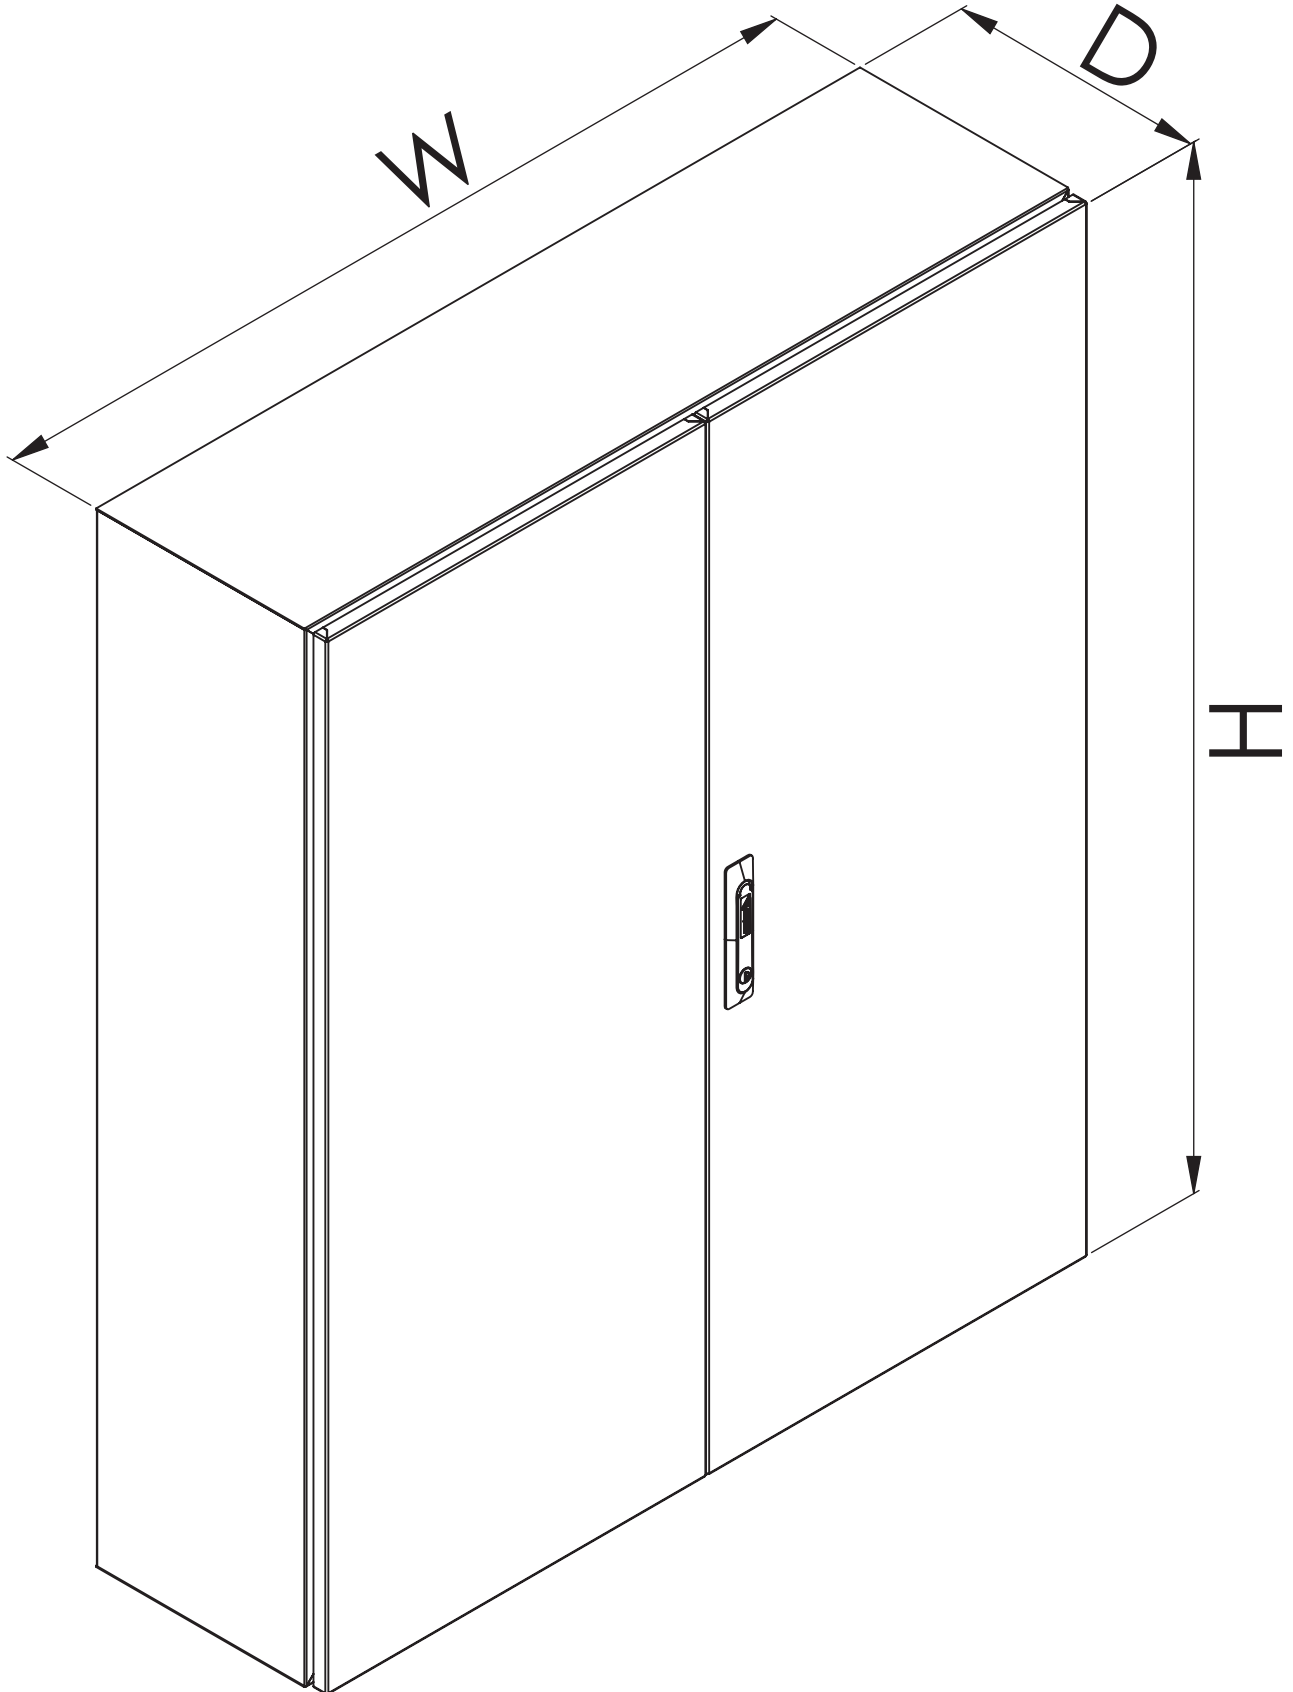

Modular Type Technical Drawings

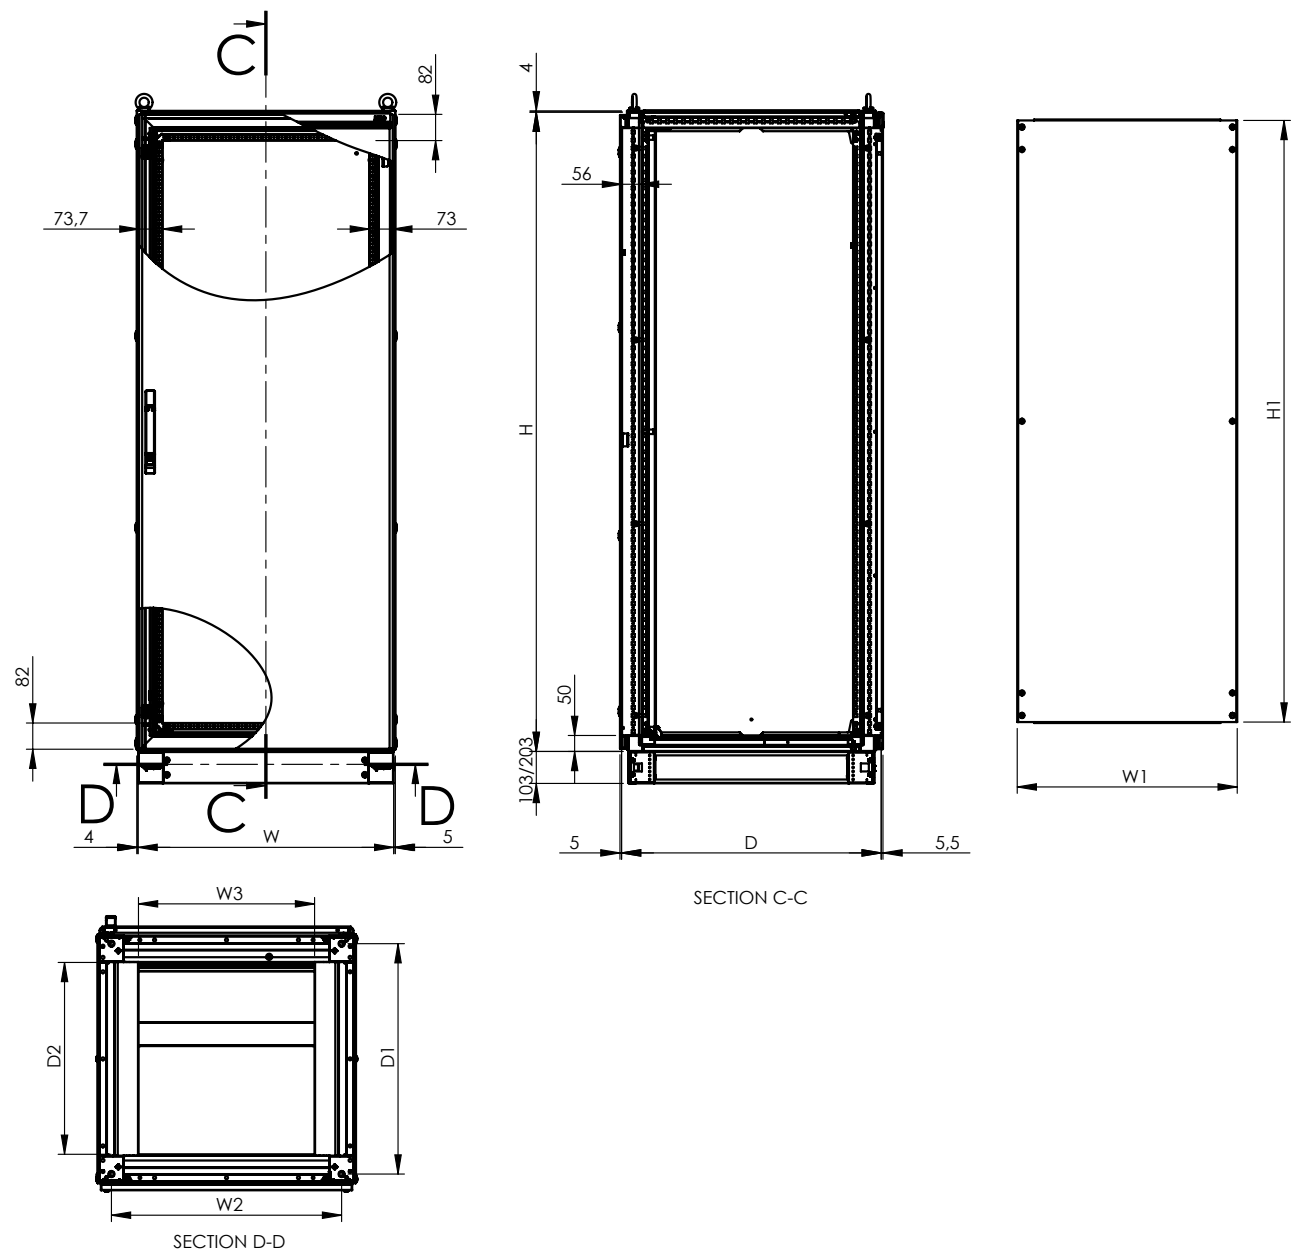


ENCLOSURE WIDTH	W	W1	W2	W3
400	400	-	320	151
600	600	488	520	351
800	800	688	720	551
1000	1000	888	920	344,5x2
1200	1200	1088	1120	444,5x2

ENCLOSURE DEPTH	D	D1	D2
400	370	320	203
500	470	420	303
600	570	520	403
800	770	720	603

ENCLOSURE HEIGHT	H	H1
1200	1200	1088
1600	1600	1488
1800	1800	1688
2000	2000	1888

Modular Type Technical Drawings

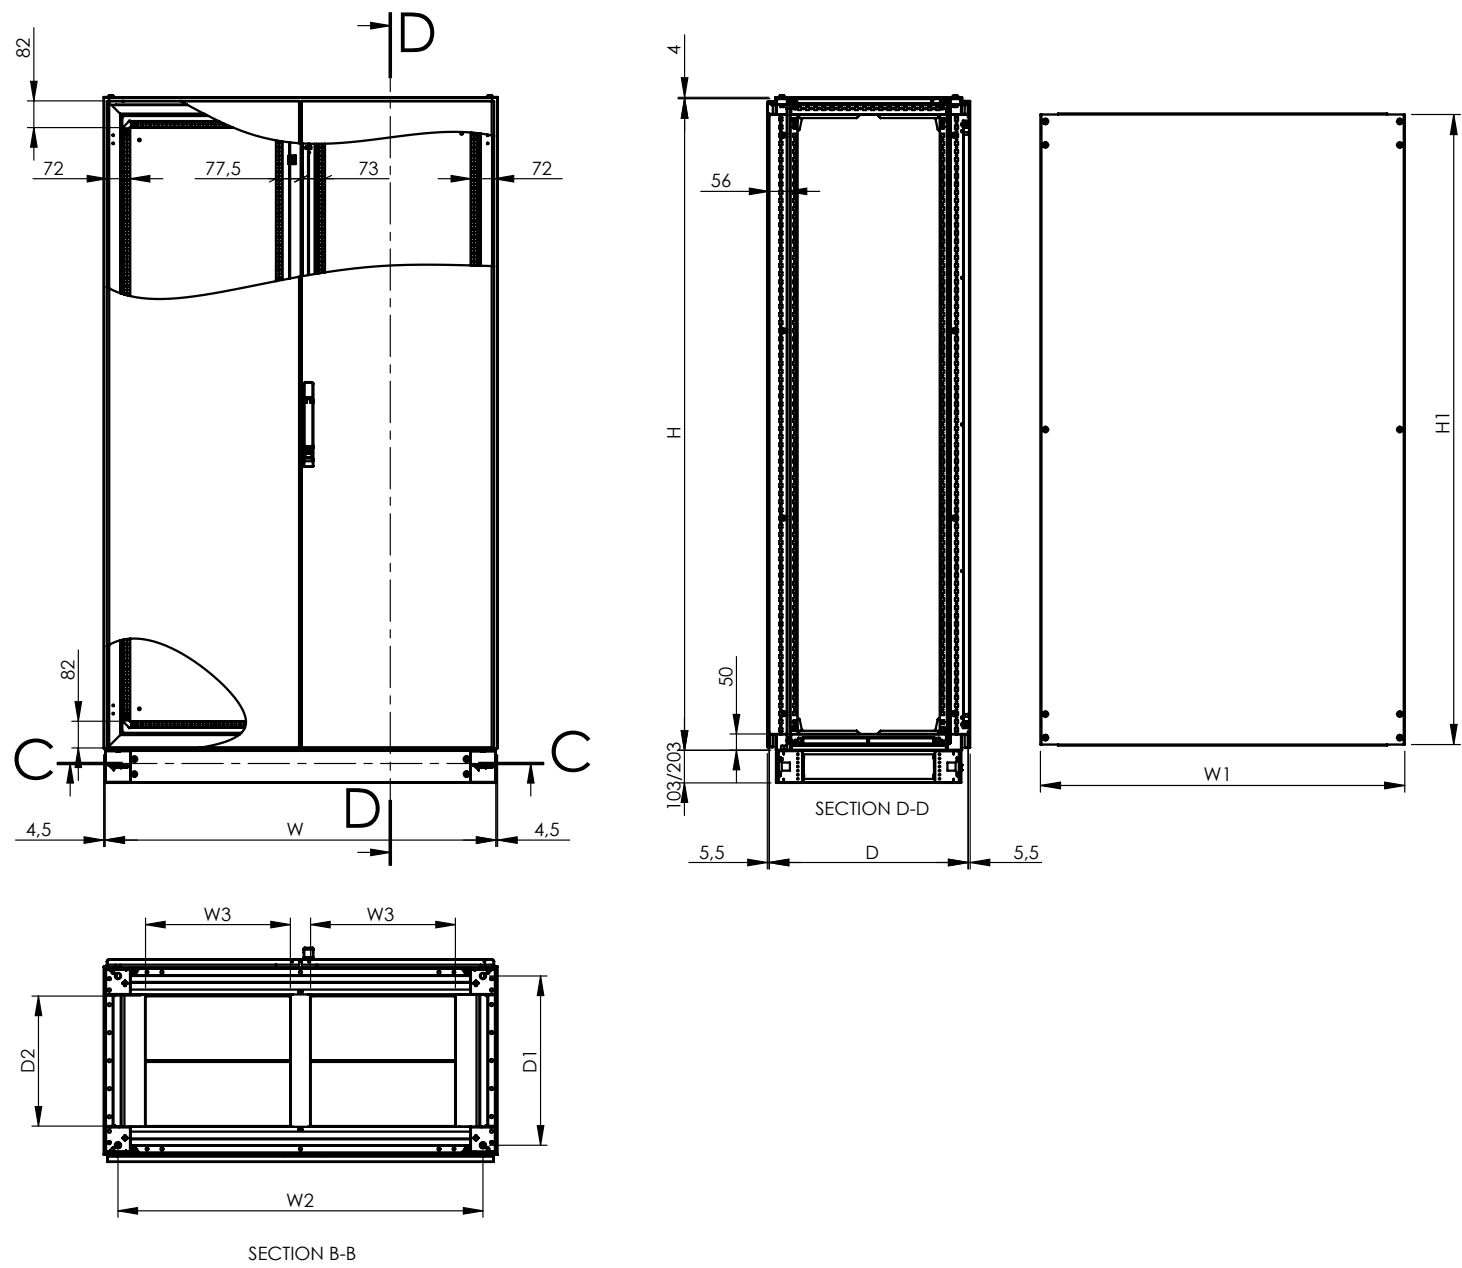


ENCLOSURE WIDTH	W	W1	W2	W3
400	400	-	320	151
600	600	488	520	351
800	800	688	720	551
1000	1.000	888	920	344,5x2
1200	1200	1088	1120	444,5x2

ENCLOSURE DEPTH	D	D1	D2
400	370	320	203
500	470	420	303
600	570	520	403
800	770	720	603

ENCLOSURE HEIGHT	H	H1
1200	1200	1088
1600	1600	1488
1800	1800	1688
2000	2000	1888

Monoblock Type Technical Drawings

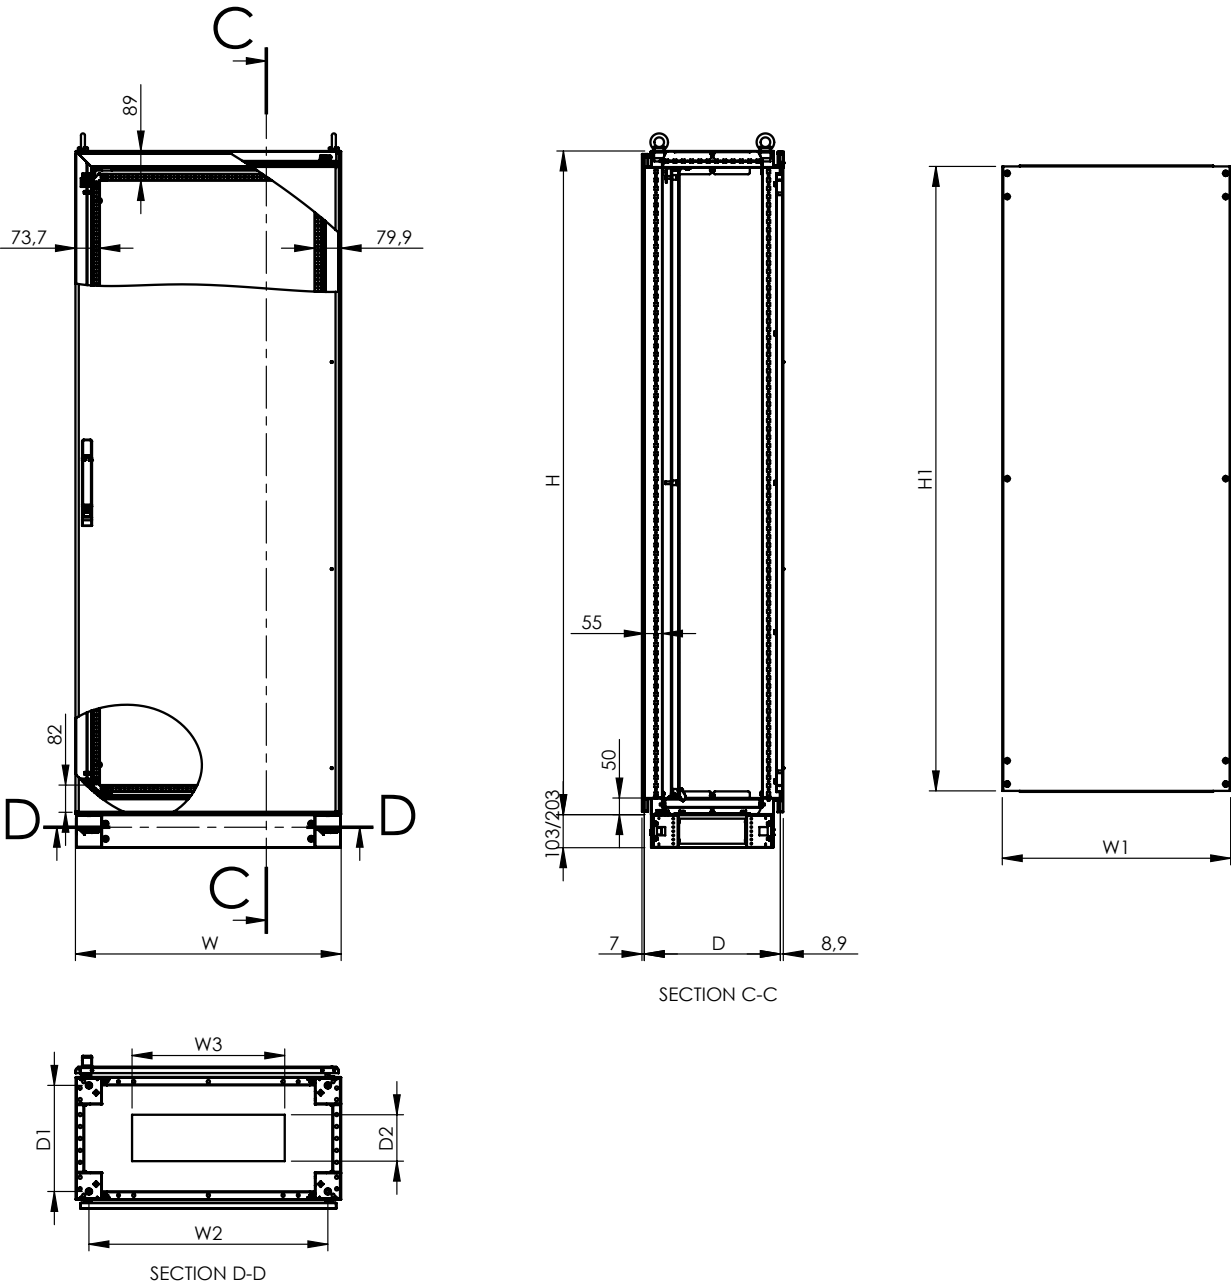


ENCLOSURE WIDTH	W	W1	W2	W3
600	600	488	520	260
800	800	688	720	460
1000	1000	888	920	260x2
1200	1200	1088	1120	360x2

ENCLOSURE DEPTH	D	D1	D2
400	370	320	140
500	470	420	140
600	570	520	140

ENCLOSURE HEIGHT	H	H1
1200	1200	1088
1600	1600	1488
1800	1800	1688
2000	2000	1888


Monoblock Type Technical Drawings

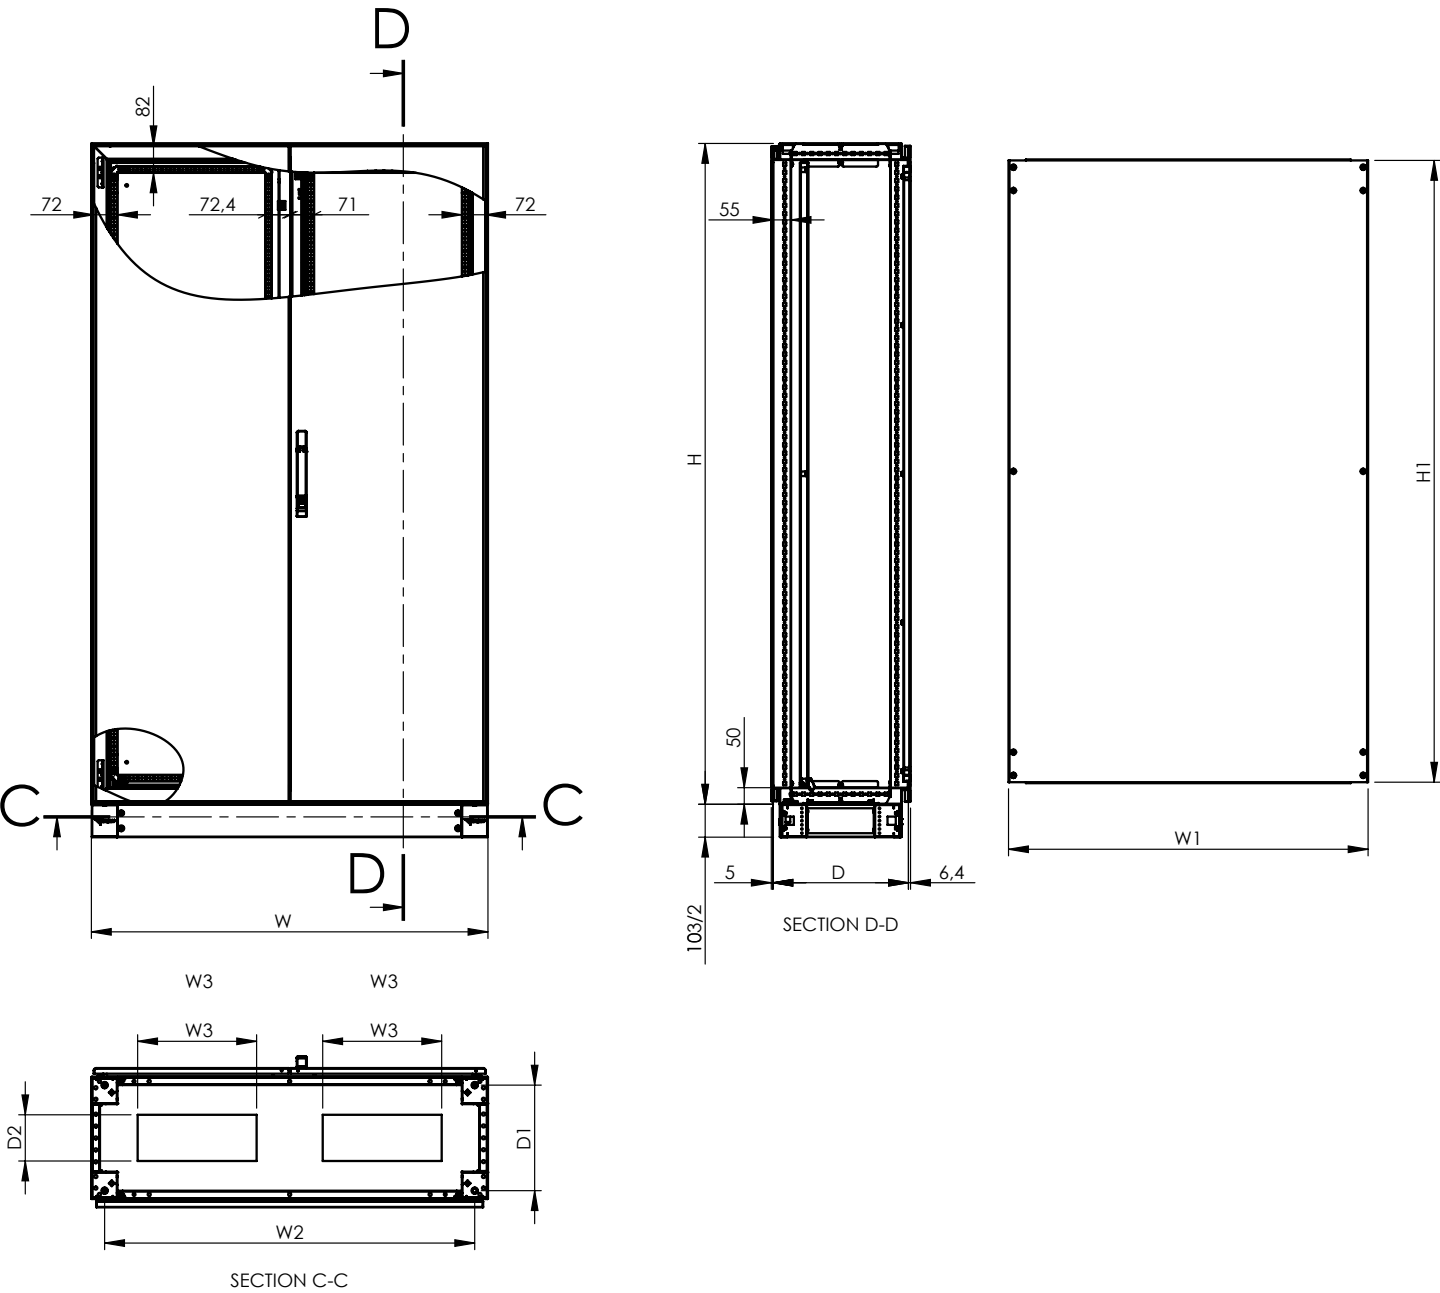

ENCLOSURE WIDTH	W	W1	W2	W3
600	600	488	520	260
800	800	688	720	460
1000	1000	888	920	260x2
1200	1200	1088	1120	360x2

ENCLOSURE DEPTH	D	D1	D2
400	370	320	140
500	470	420	140
600	570	520	140

ENCLOSURE HEIGHT	H	H1
1200	1200	1088
1600	1600	1488
1800	1800	1688
2000	2000	1888

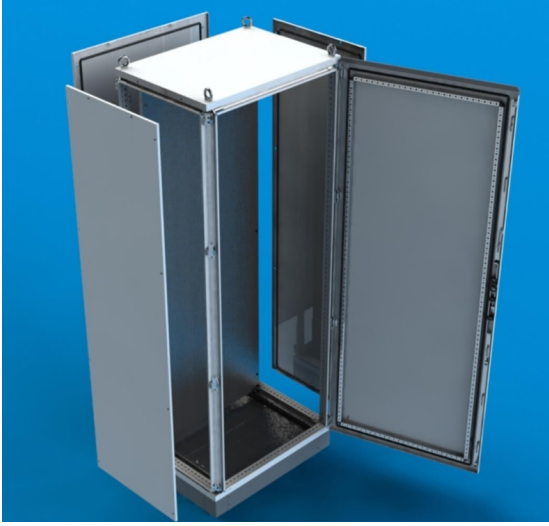

GENERAL STRUCTURAL FEATURES

MODULAR SERIES

Welded frames 1,50 mm galvanised steel + RAL 7035 powder coated Rear Panel 1,20 mm mild steel + RAL powder coated

Top Cover 1,20 mm mild steel + RAL 7035 powder coating

Plinth Covers 1,50 mm galvanized steel + RAL 7012 powder-coating Gland Plates 1,50 mm galvanized steel

Side Panel 1,20 mm mild steel + RAL 7035 powder coating (2 pcs)

Front door 1,50 mm mild steel + RAL 7035 powder coated

Depth Parts 1,50 mm mild steel + RAL 7035 (4 pcs)

Plinth Corners 2,00 mm galvanized steel + RAL 7012 powder-coating Gland Plate System 1,50 mm galvanized steel + RAL 7035 powder coating Mounting Plate 3,00 mm & 2,00 mm Galvanized steel

IP Protection Single Door: IP 55 Double Door: IP 54 Glazed Door: IP 54

MONOBLOCK SERIES

Enclosure body 1,50 mm Galvanized steel + RAL 7035 Powder Coating Front door 1,50 mm sheet steel + RAL 7035 Powder coating

IP Protection Single Door: IP 65 Double Door: IP 54 Glazed Door: IP 54 Gland plate 1,50 mm Galvanized steel + RAL 7035 Powder Coating

Rear Panel 1,20 mm sheet steel + RAL 7035 Powder Coating

Fully welded frame made of 1.5 mm material

Half closed height and width profiles

Fully closed and secured sides


PKT SERIES

MaterialAll steel sheets: 1,50 mm quality 304 stainless steel

IP ProtectionIP 66

Surface ProcessNatural stainless-steel surface application


Supply includes1 pcs body,1 pcs screwed lid, 4 pcs wall brackets and assembly parts

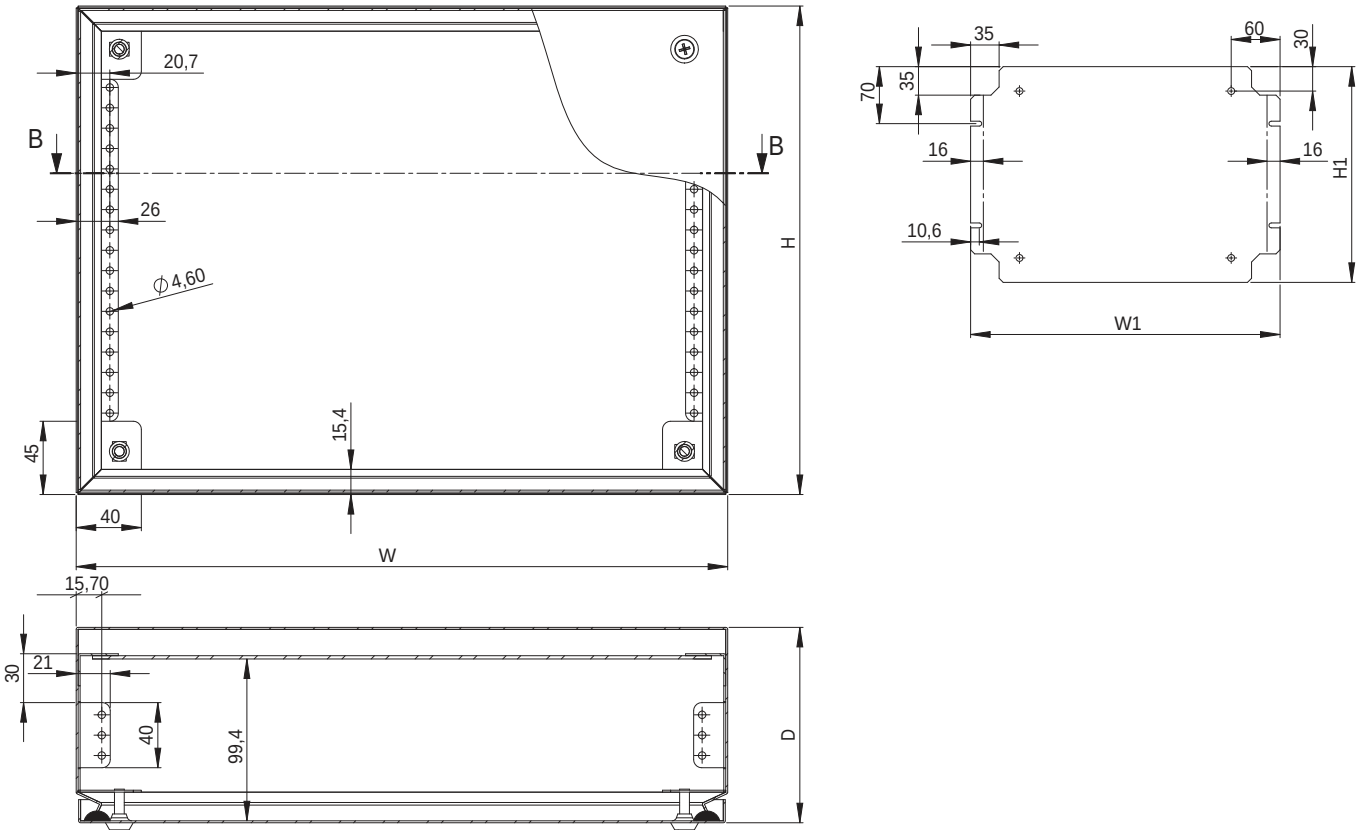

ENCLOSURE WIDTH	W	W1
200	200	180
300	300	280
400	400	380
500	500	480
600	600	580


ENCLOSURE DEPTH	D
120	120
120	120
120	120
120	120
120	120

ENCLOSURE HEIGHT	H	H1
200	200	165
300	300	265
400	400	365

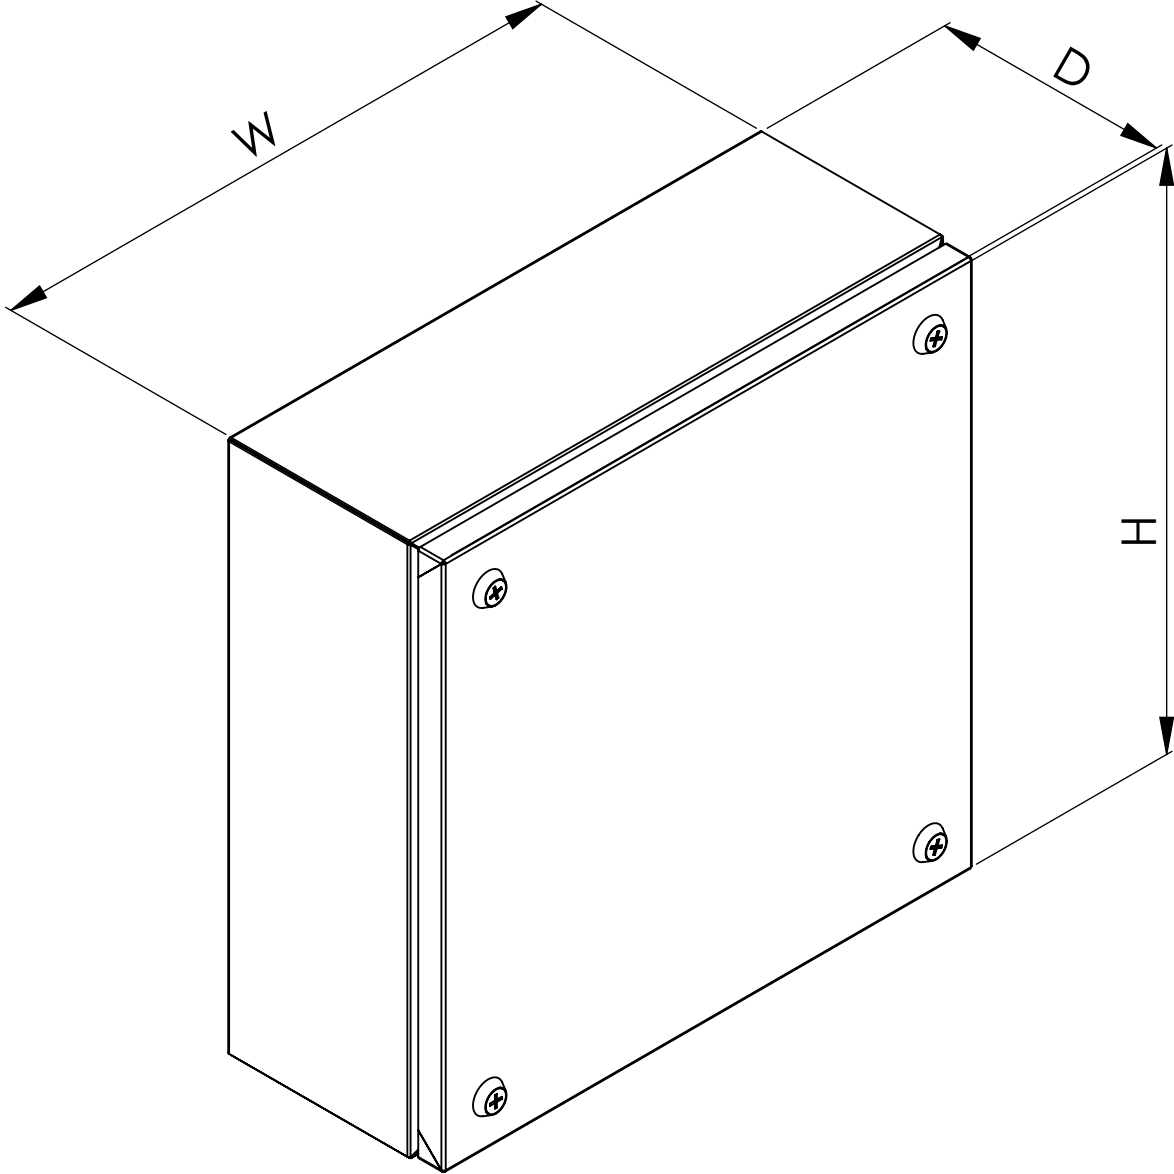

PDM SERIES

MaterialBody: 1,50 mm, 304 stainless steel sheet
Mounting plate2,00 mm galvanized steel
IP ProtectionSingle door: IP 66 Double door: IP55
Door1,50 mm-2,00 mm stainless steel sheet
Surface ProcessNatural stainless steel surface application
Supply includes1 pcs body, 1 pcs door, 1 pcs mounting plate, 1 pcs gland plate

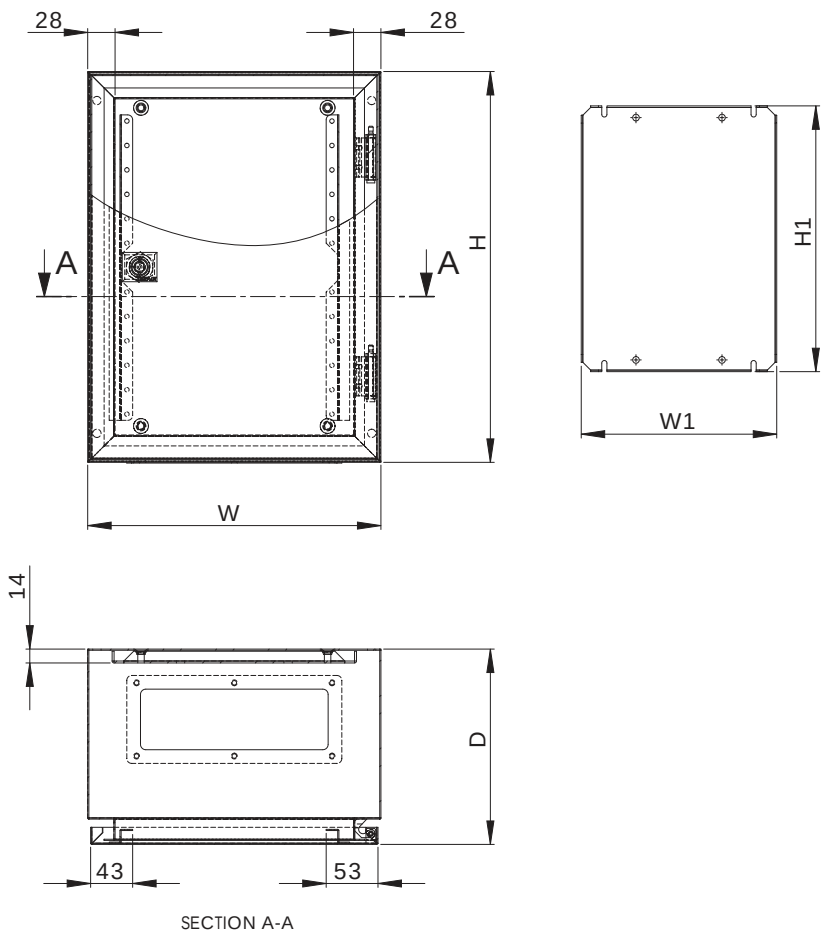


ENCLOSURE WIDTH	W	W1
200	200	150
300	300	250
400	400	350
500	500	450
600	600	550
800	800	750
1000	1000	950

ENCLOSURE DEPTH	D
150	150
200	200
280	280

ENCLOSURE HEIGHT	H	H1
300	300	240
400	400	340
500	500	440
600	600	540
800	800	640
1000	1000	740

PDM SERIES


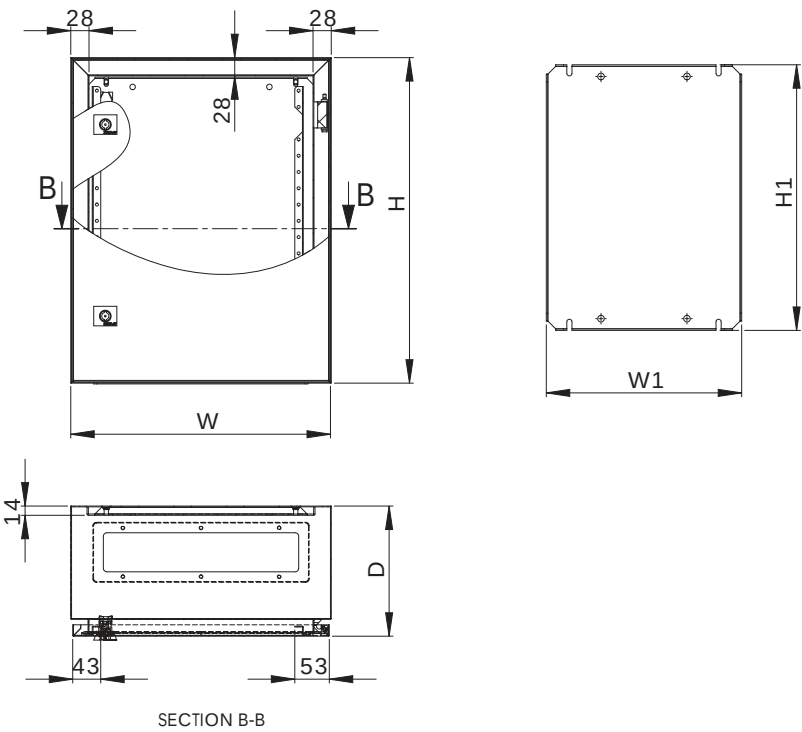


ENCLOSURE WIDTH	W	W1
200	200	150
300	300	250
400	400	350
500	500	450
600	600	550
800	800	750
1000	1000	950

ENCLOSURE DEPTH	D
150	150
200	200
280	280

ENCLOSURE HEIGHT	H	H1
300	300	240
400	400	340
500	500	440
600	600	540
800	800	640
1000	1000	740

PDM SERIES

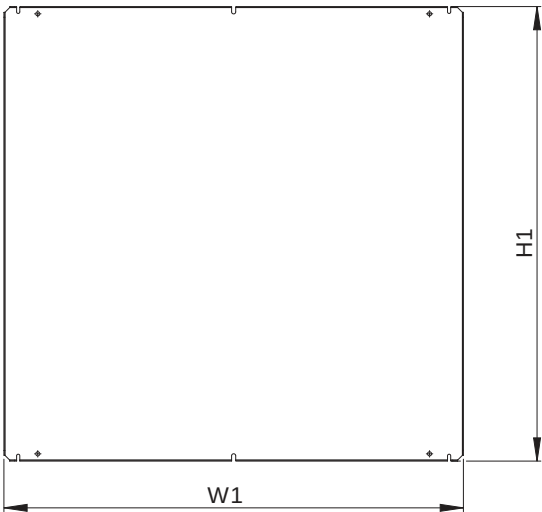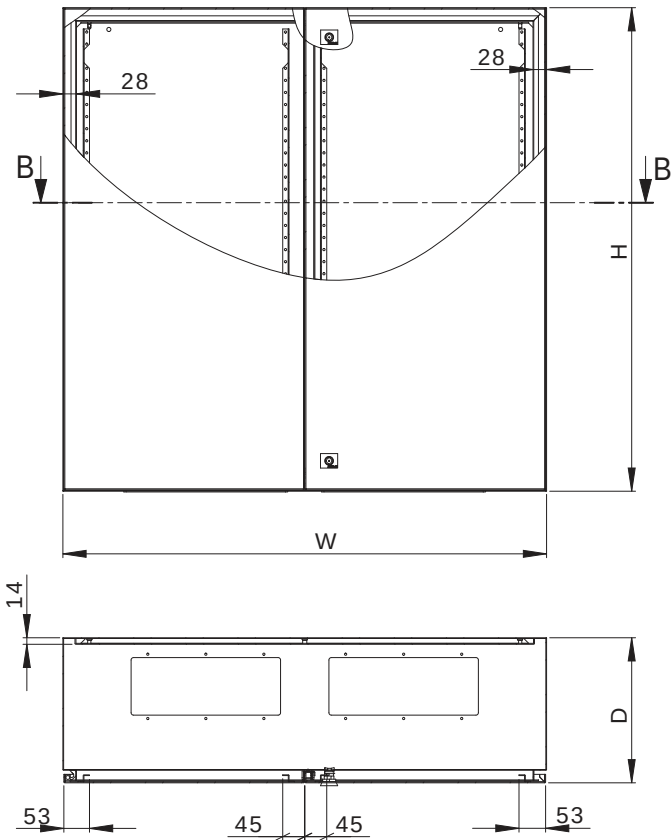


ENCLOSURE WIDTH	W	W1
200	200	150
300	300	250
400	400	350
500	500	450
600	600	550
800	800	750
1000	1000	950

ENCLOSURE DEPTH	D
150	150
200	200
280	280

ENCLOSURE HEIGHT	H	H1
300	300	240
400	400	340
500	500	440
600	600	540
800	800	640
1000	1000	740

PDM SERIES

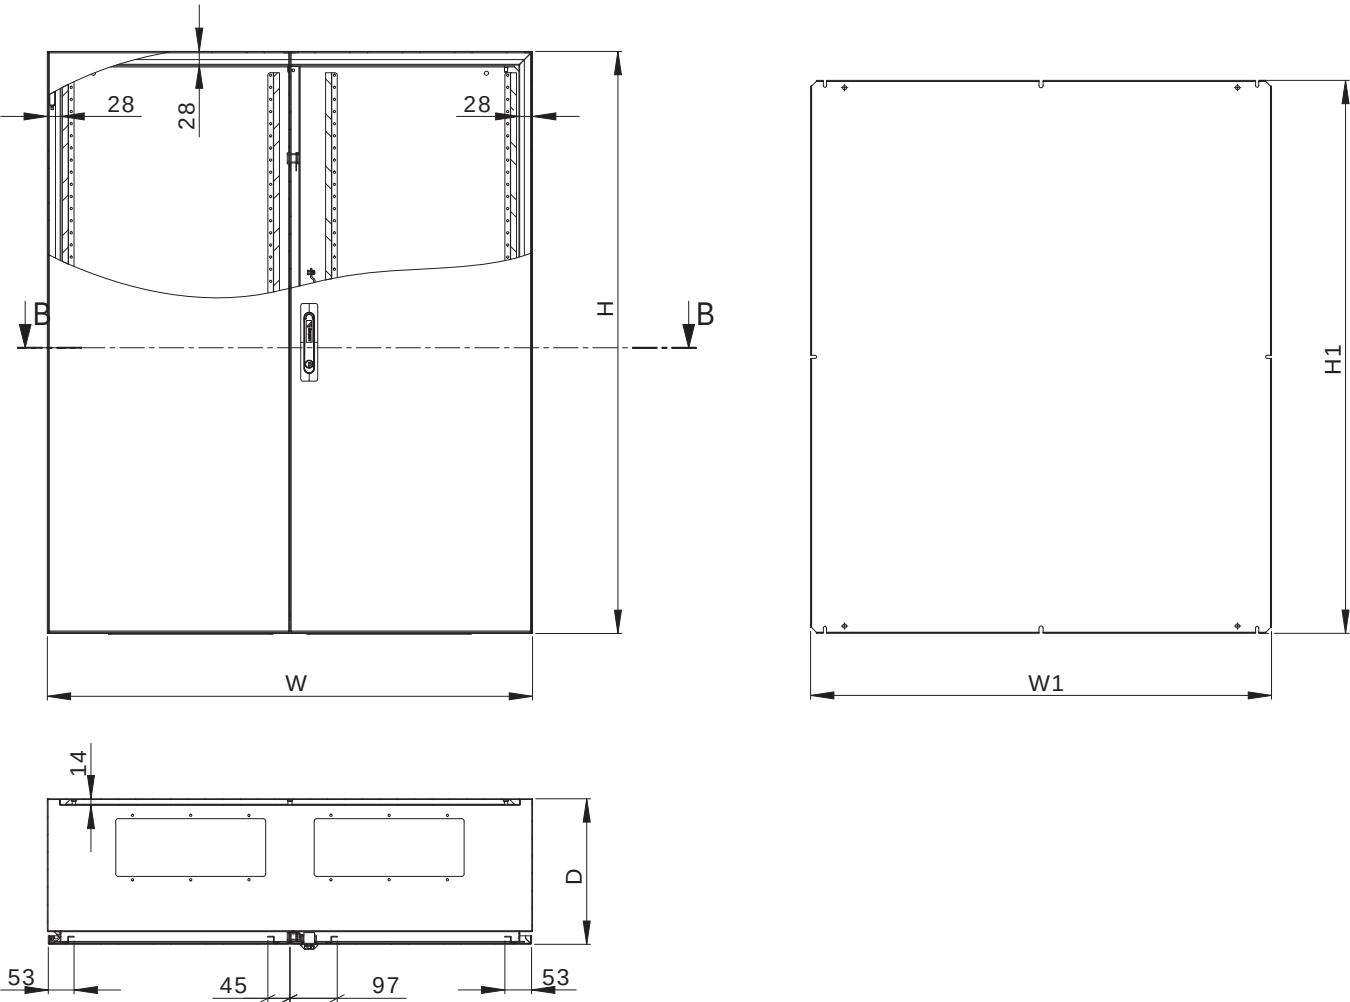


ENCLOSURE WIDTH	W	W1
200	200	150
300	300	250
400	400	350
500	500	450
600	600	550
800	800	750
1000	1000	950


ENCLOSURE DEPTH	D
150	150
200	200
280	280

ENCLOSURE HEIGHT	H	H1
300	300	240
400	400	340
500	500	440
600	600	540
800	800	740
1000	1000	940


PDM SERIES

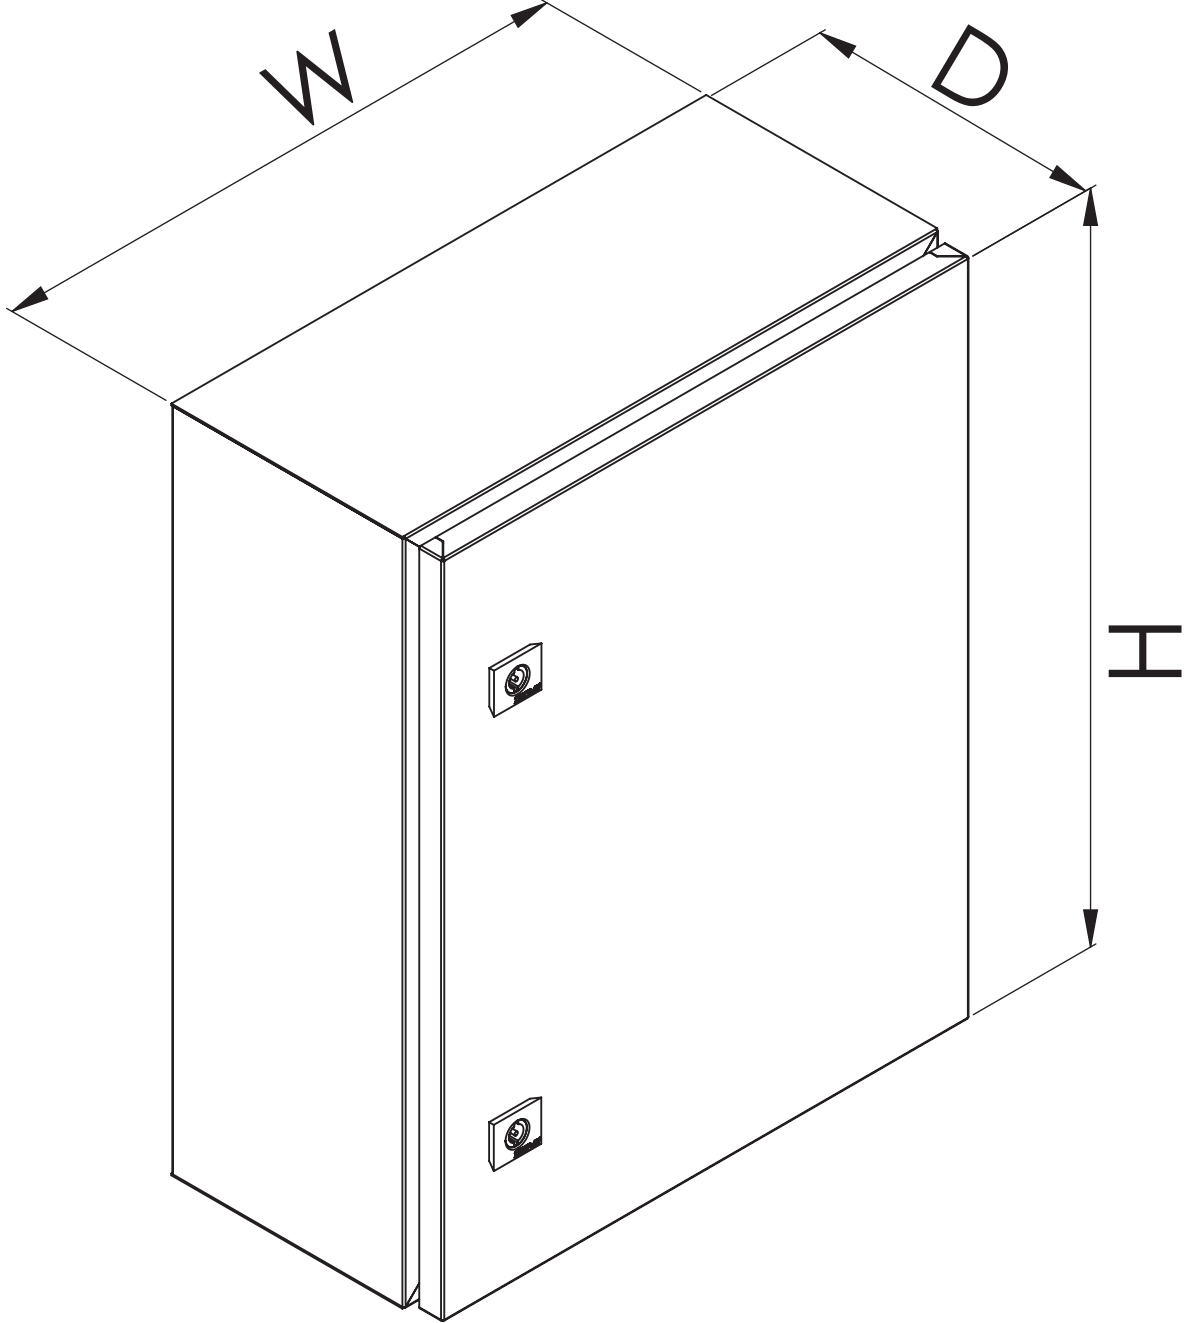


PDM SERIES

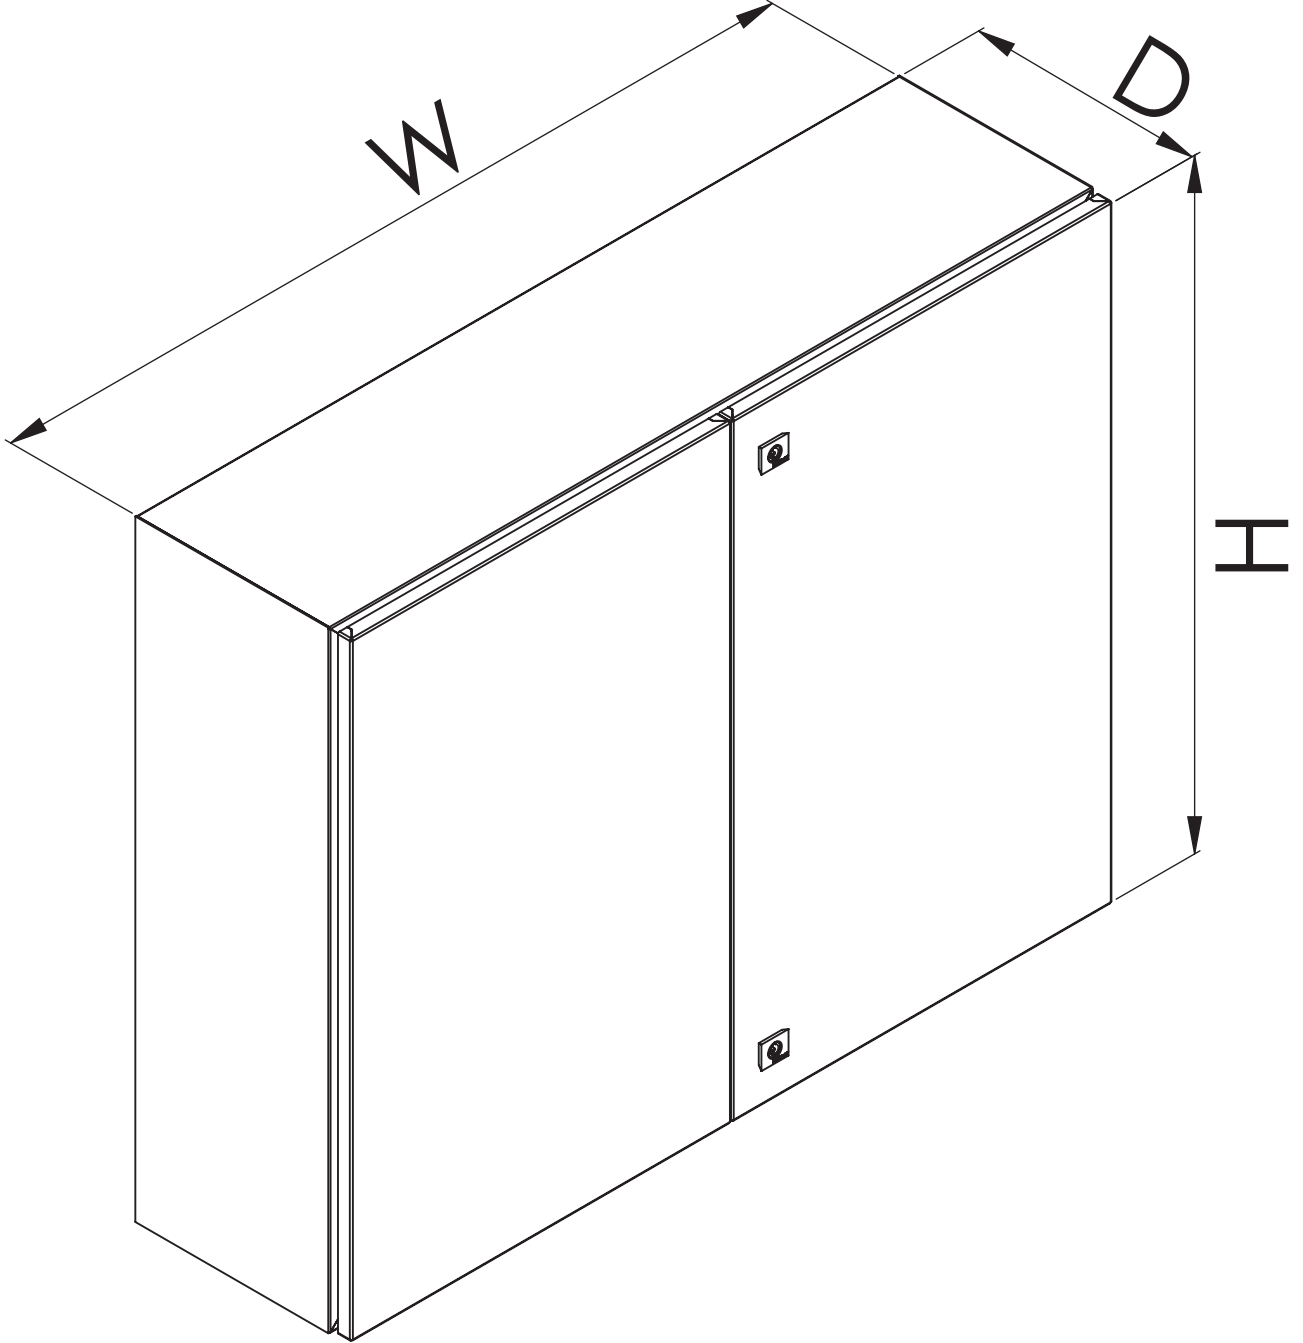


PDM SERIES

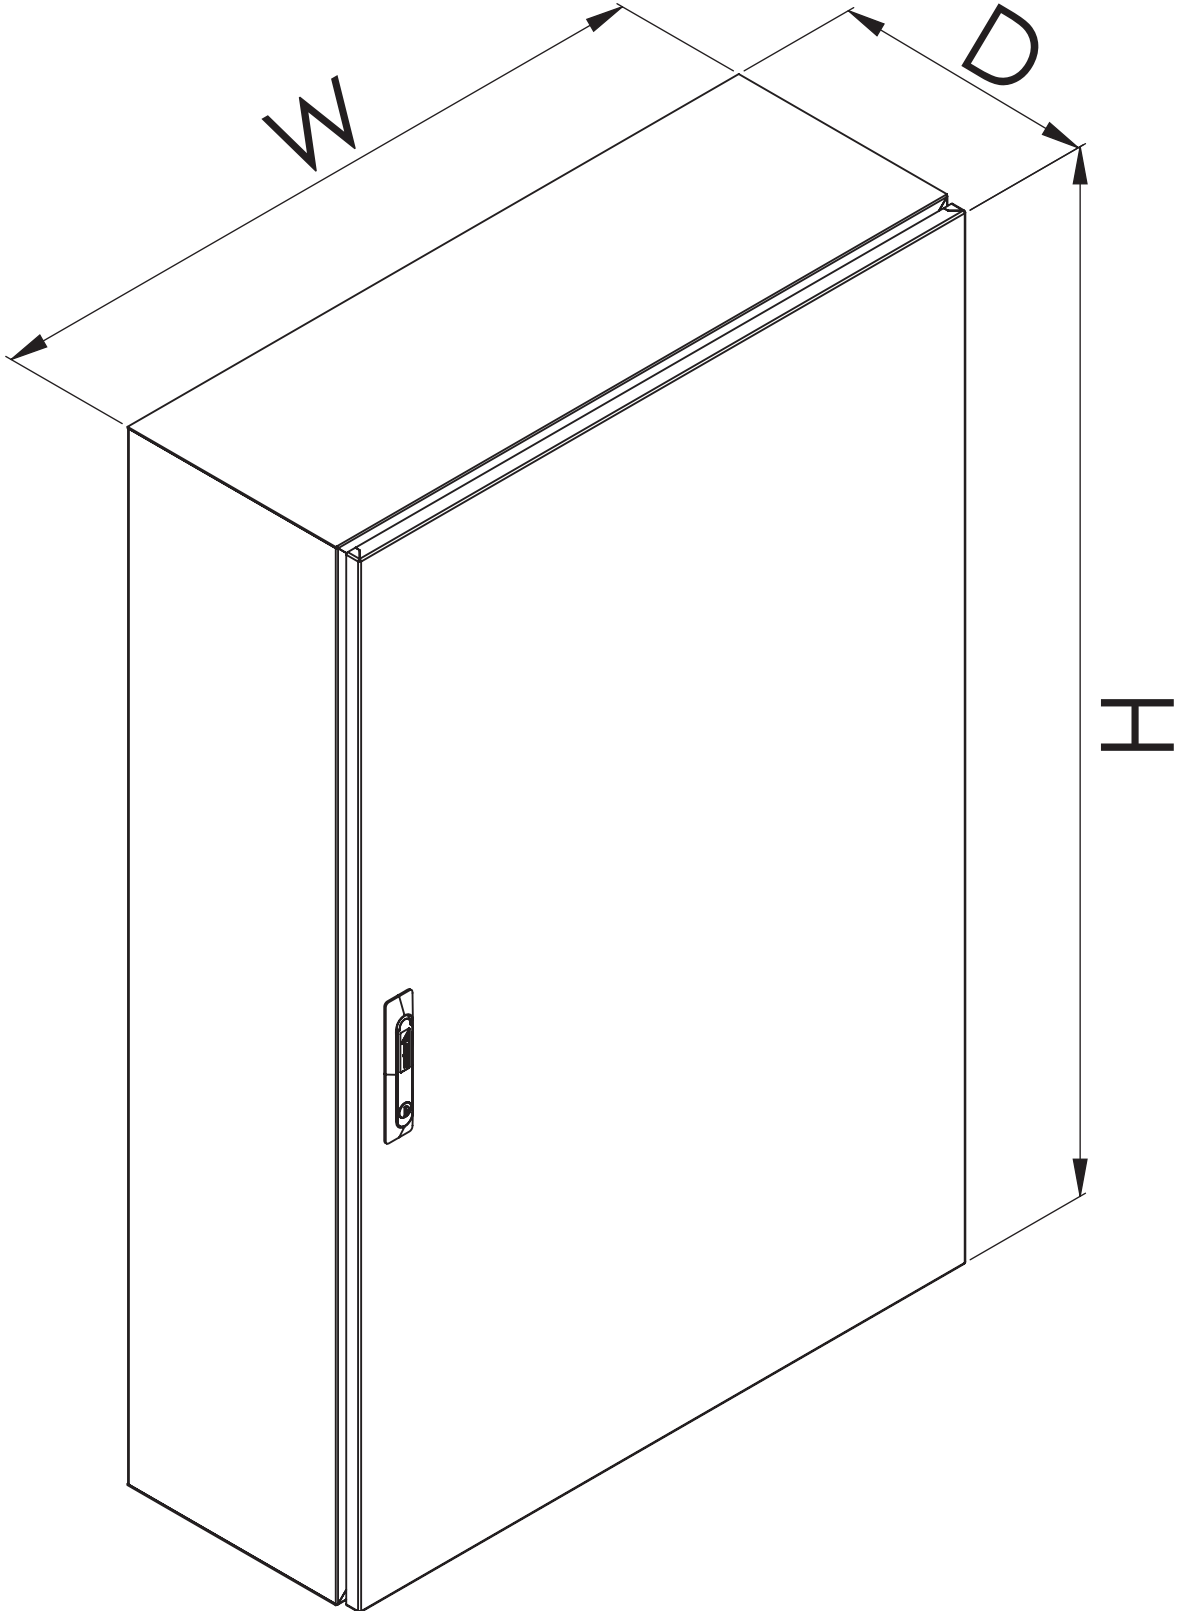


PDM SERIES

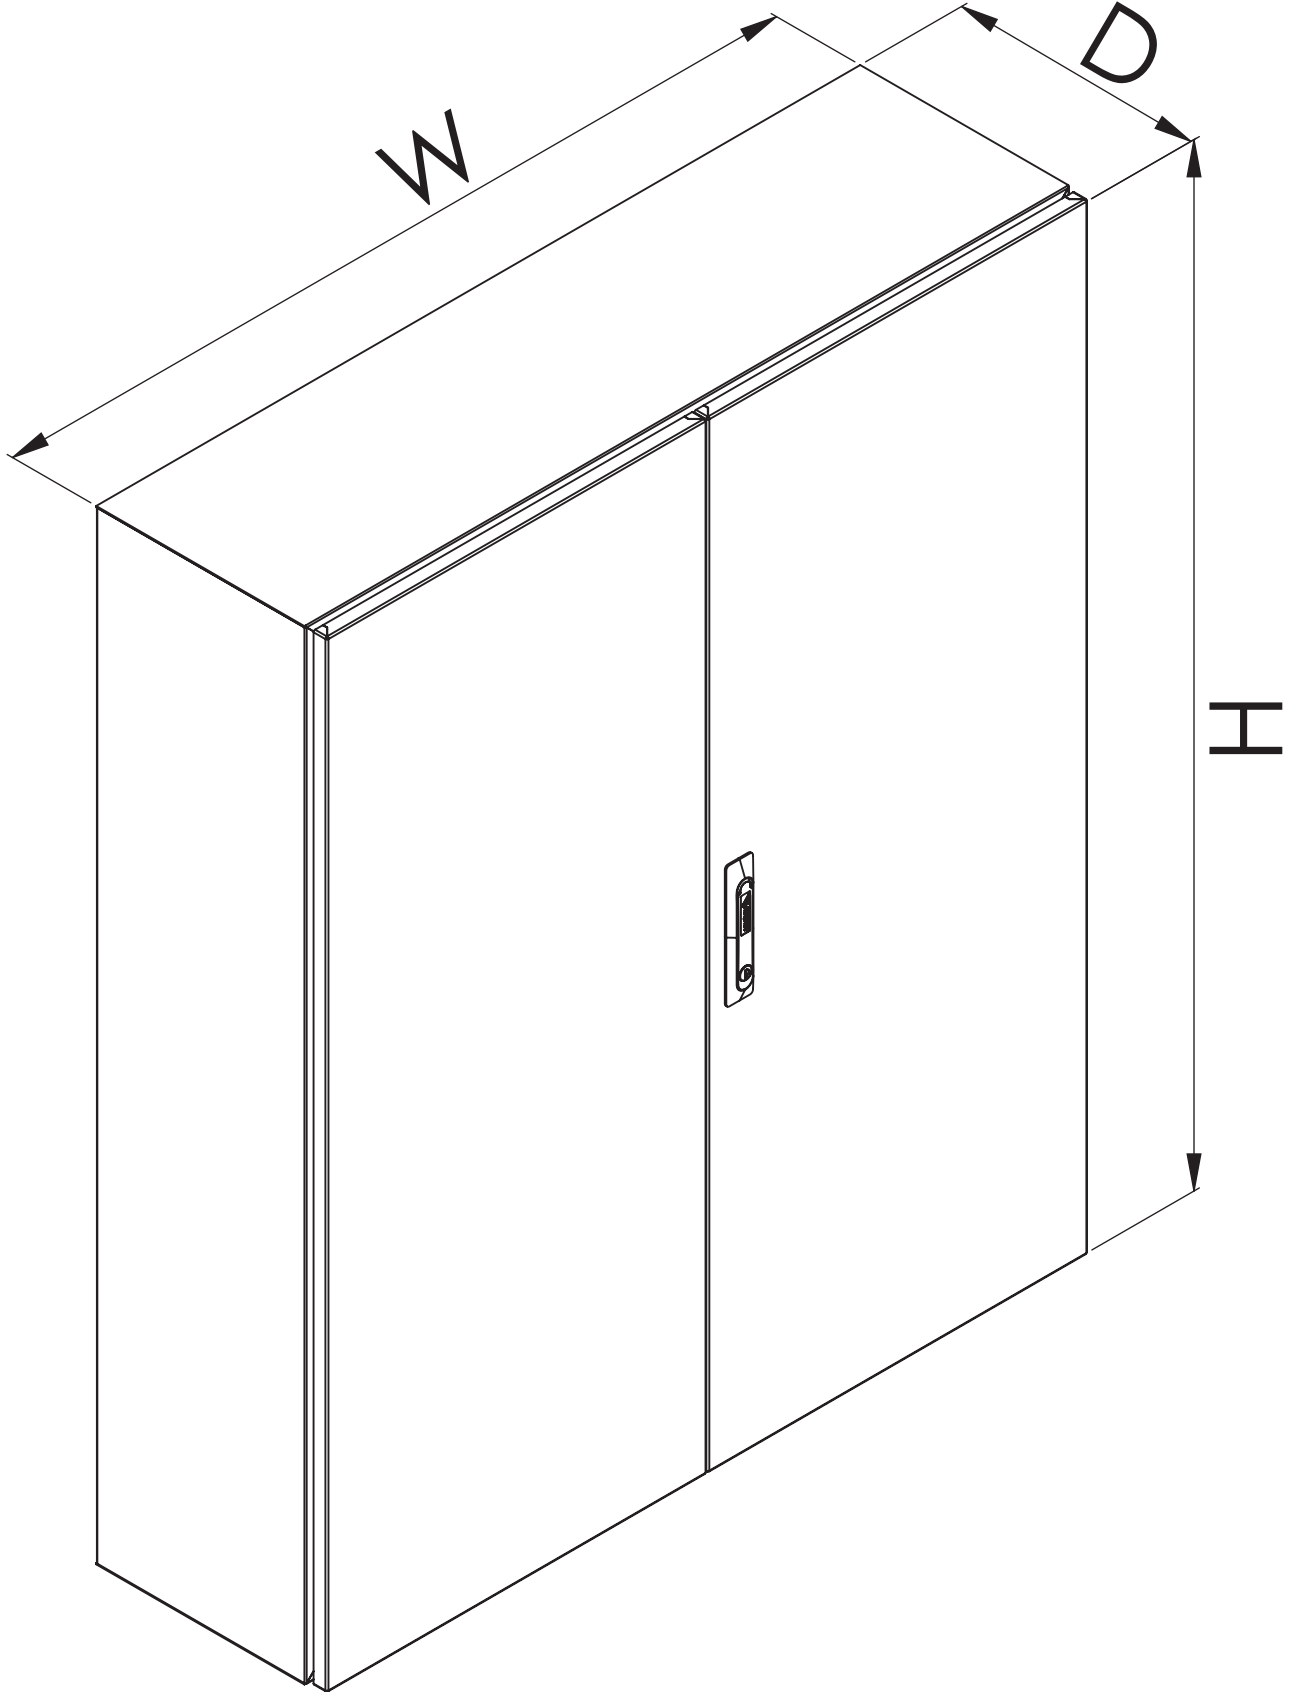



PDM SERIES

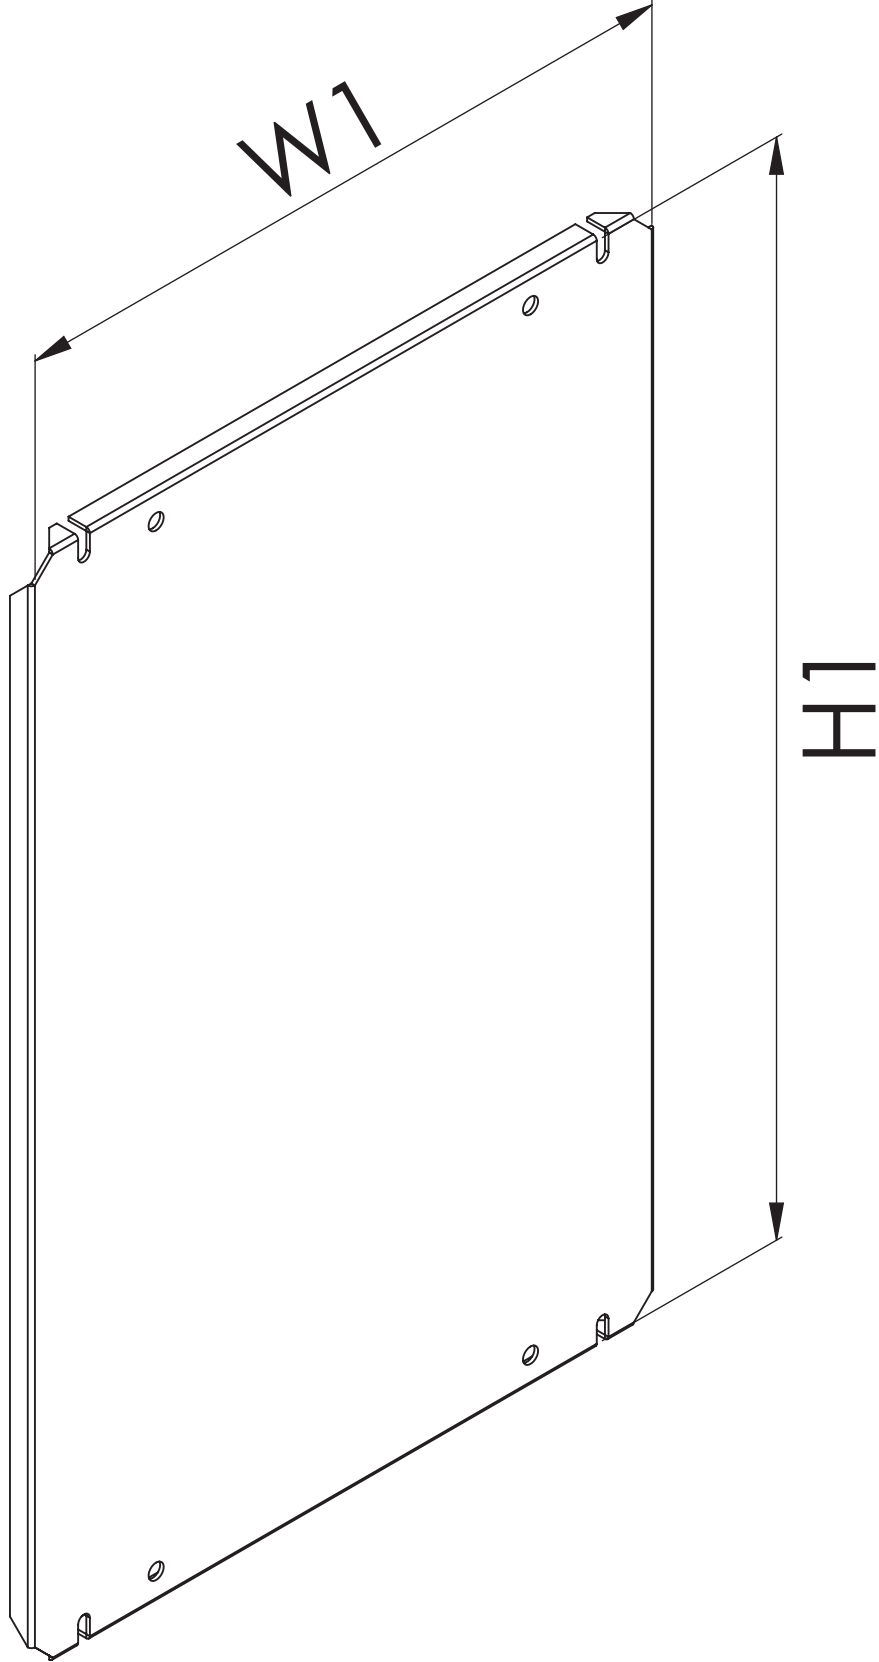



POLY-OD MODULAR SERIES

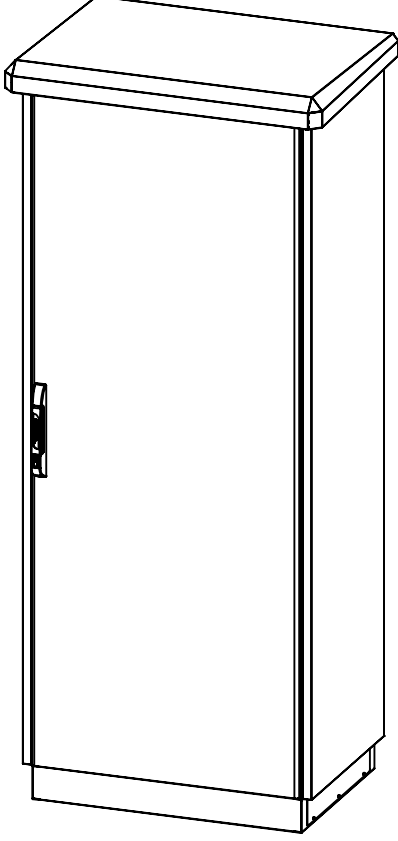

Main Body 1,5mm Galvanized
Top / Rear Panel 1-1,2mm Mild Steel
Roof 1,5mm Galvanized + RAL 7035
Surface Process Iron-phosphate + electrostatic powder coating
IP Protection Category Neo HC Modular Single Door IP55 - Double Door IP 54
Standards IEC 62208 (Enclosure Standards)
Warranty KYT-72
Accessory Roof, Side Panel, Baying Kit
Front Door 1,5mm Mild Steel
Side Panel 1,5mm Galvanized
Lock 5333 Eurokey
IK Protection Category IEC 62262 IK10
NEMA Protection Category Nema 3R
Corrosion Class EN ISO 12944-2 C3
Supply Includes Main Body, Front Door; Key ve 140° Openable Hinged, Rear Panel screw

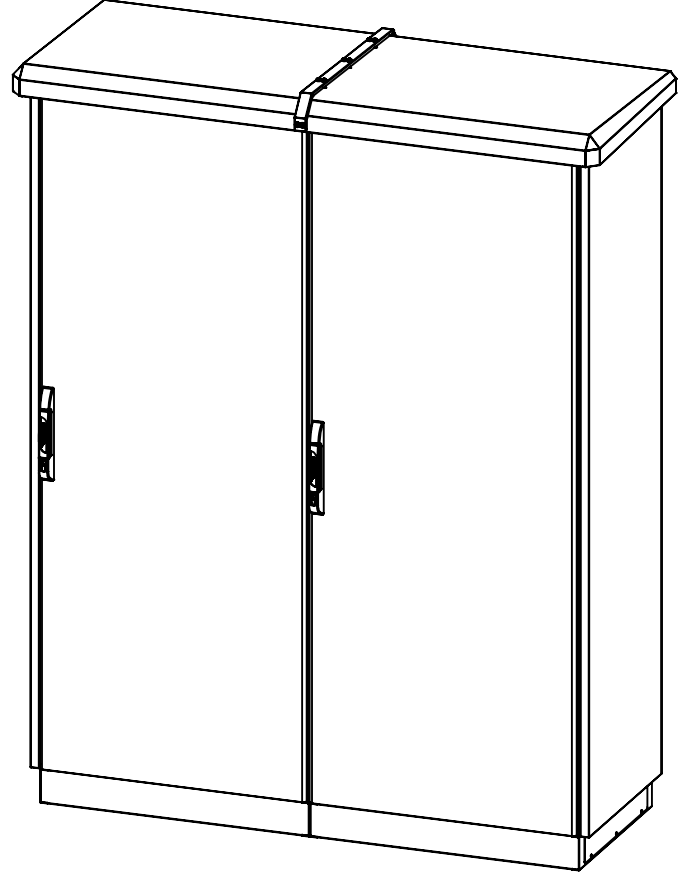
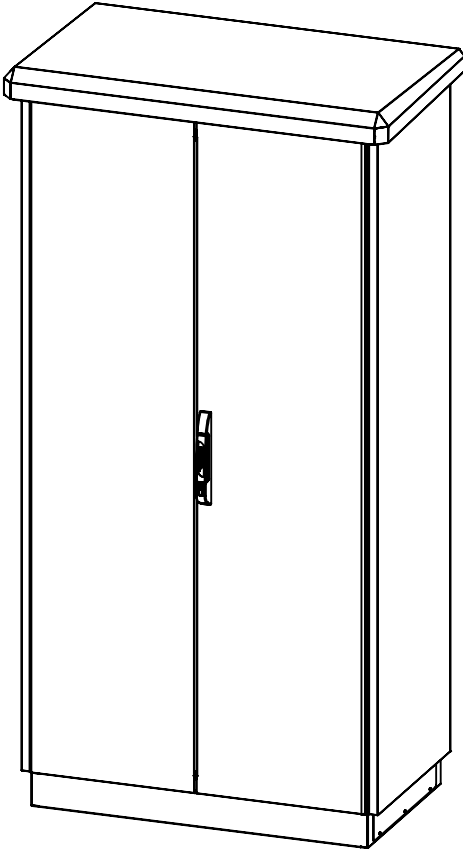


POLY-OD MODULAR SERIES

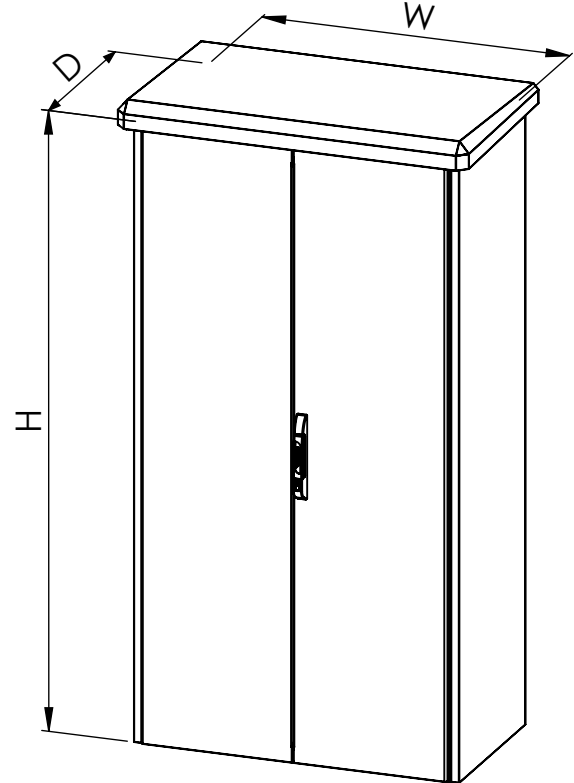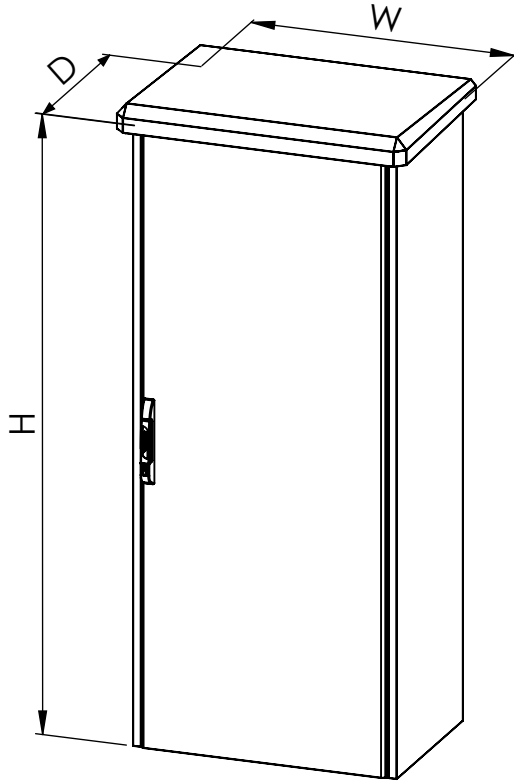

664.206.000	400 W x 2000 H x 600 D
664.208.000	400 W x 2000 H x 800 D
666.124.000	600 W x 1200 H x 400 D
666.126.000	600 W x 1200 H x 600 D
666.164.000	600 W x 1600 H x 400 D
666.166.000	600 W x 1600 H x 600 D
666.206.000	600 W x 2000 H x 600 D
666.208.000	600 W x 2000 H x 800 D
667.206.000	700 W x 2000 H x 600 D
667.208.000	700 W x 2000 H x 800 D
668.124.000	800 W x 1200 H x 400 D
668.126.000	800 W x 1200 H x 600 D
668.164.000	800 W x 1600 H x 400 D
668.166.000	800 W x 1600 H x 600 D
668.260.000	800 W x 2000 H x 600 D
668.280.000	800 W x 2000 H x 800 D

660.206.000	1000 W x 2000 H x 600 D
660.208.000	1000 W x 2000 H x 800 D
662.206.000	1200 W x 2000 H x 600 D
662.208.000	1200 W x 2000 H x 800 D

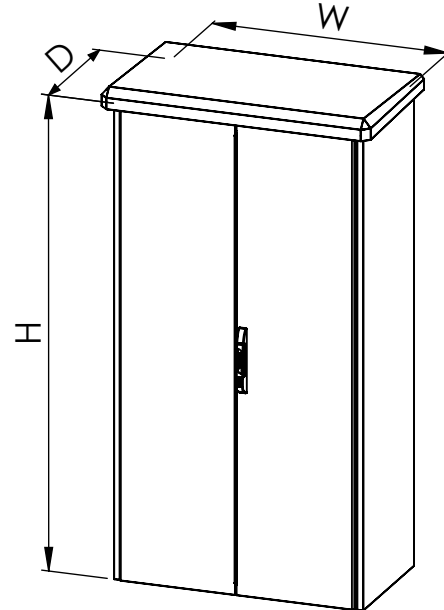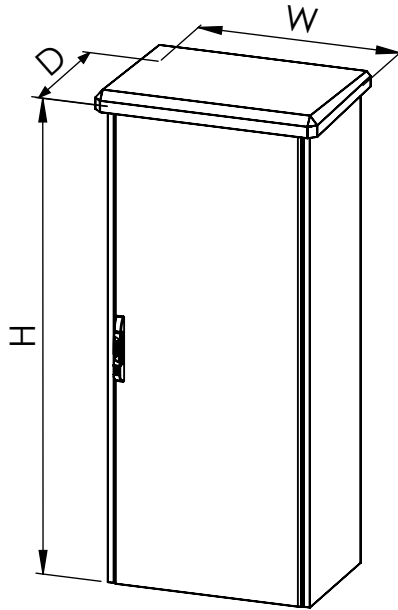

ITEM	Ref.No:	PRODUCT INFORMATION																		
		ENCLOSURE DIMENSIONS W x H x D (mm)			SHEET THICKNESS(mm)										MOUNTING PLATE DIEMENSIONS W x H (mm)		MOUNTING PLATE	DOOR		
		*WIDTH (mm)	*HEIGHT (mm)	*DEPTH (mm)	MAIN BODY (mm)	FRONT DOOR (mm)	TOP COVER (mm)	SIDE PANEL (mm)	REAR PANEL (mm)	MOUNTING PLATE (mm)	ROOF SINGLE MODULE	ROOF LEFT MODULE	ROOF RIGHT MODULE	ROOF MIDDLE MODULE	WIDTH (mm)	HEIGHT	INC.-W/O	DOOR TYPE	LOCK	HINGE
1	664.206.000	400	2000	600	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	288	1888	W/O	Single	PUSH-PULL LOCK	4
2	664.208.000	400	2000	800	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	288	1888	W/O	Single	PUSH-PULL LOCK	4
3	666.124.000	600	1200	400	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	488	1088	W/O	Single	PUSH-PULL LOCK	4
4	666.126.000	600	1200	600	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	488	1088	W/O	Single	PUSH-PULL LOCK	4
5	666.164.000	600	1600	400	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	488	1488	W/O	Single	PUSH-PULL LOCK	4
6	666.166.000	600	1600	600	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	488	1488	W/O	Single	PUSH-PULL LOCK	4
7	666.206.000	600	2000	600	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	488	1888	W/O	Single	PUSH-PULL LOCK	4
8	666.208.000	600	2000	800	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	488	1888	W/O	Single	PUSH-PULL LOCK	4
9	667.206.000	700	2000	600	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	588	1888	W/O	Single	PUSH-PULL LOCK	4
10	667.208.000	700	2000	800	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	588	1888	W/O	Single	PUSH-PULL LOCK	4
11	668.124.000	800	1200	400	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	688	1088	W/O	Single	PUSH-PULL LOCK	4
12	668.126.000	800	1200	600	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	688	1088	W/O	Single	PUSH-PULL LOCK	4
13	668.164.000	800	1600	400	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	688	1488	W/O	Single	PUSH-PULL LOCK	4
14	668.166.000	800	1600	600	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	688	1488	W/O	Single	PUSH-PULL LOCK	4
15	668.260.000	800	2000	600	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	688	1888	W/O	Single	PUSH-PULL LOCK	4
16	668.280.000	800	2000	800	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	688	1888	W/O	Single	PUSH-PULL LOCK	4
17	660.206.000	1000	2000	600	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	888	1888	W/O	Double	PUSH-PULL LOCK	4
18	660.208.000	1000	2000	800	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	888	1888	W/O	Double	PUSH-PULL LOCK	4
19	662.206.000	1200	2000	600	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	1088	1888	W/O	Double	PUSH-PULL LOCK	4
20	662.208.000	1200	2000	800	1,5	1,5	1-1,2	1,5	1-1,2	2	1,5	1,5	1,5	1,5	1088	1888	W/O	Double	PUSH-PULL LOCK	4

Material	Main Body, Side Panel, Roof Single Module, Roof Left Module, Roof Right Module, Roof Medium Module 1,5mm Galvanized Sheet; Front Door 1,5mm Mild Steel; Top Cover - Rear Panel 1-1,2mm Mild Steel; Mounting Plate 2mm Galvanized
Surface Finishing	Iron-phosphate + electrostatic powder coating RAL 7035
IK 10	Single Door, Double Door Enclosure
IP Class	IEC ve EN 60529 Single Door, Double Door IP 55
NEMA Class	Nema 3R
Standarts	IEC 62208 (Enclosure Standarts)
Corrosion Class	C3 according to TS EN ISO 12944-2
Guarantee	KYT-72

PMT-1000 SERIES





Material Body, Doors: 1,50 mm mild steel + Ral 7035 coating

Mounting plate 2,00 mm Galvanized steel

Supply includes 1 pcs compact body, 1 pcs door, 1 pcs top panel with damper, 1 pcs mounting plate, 1 set of gland


Support Plinth Corner 2,00 mm Galvanized Steel + Ral 7035 coating


IP Protection IP 55

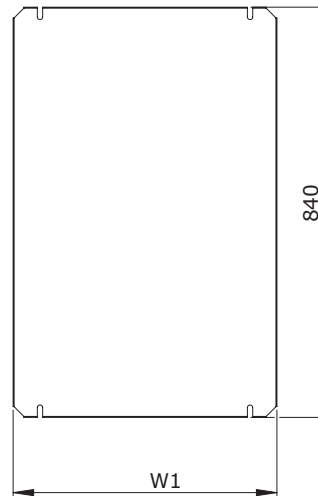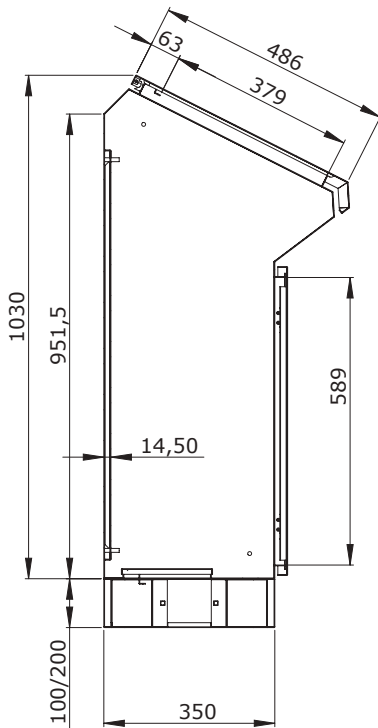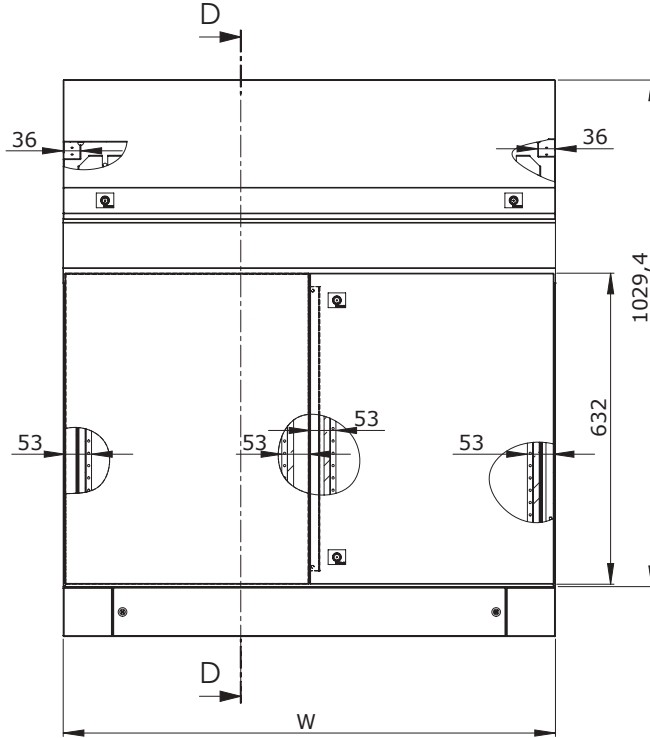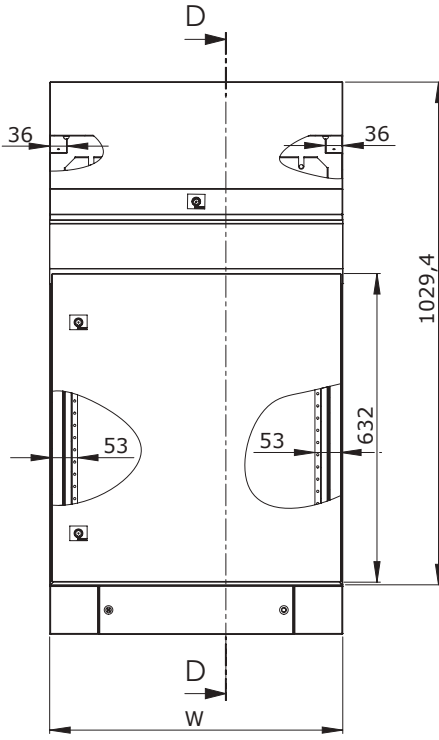

PANO GENİŞLİK	W	W1
600	600	540
800	800	740
1000	1000	940
1200	1200	1140

PMT-1000 SERIES

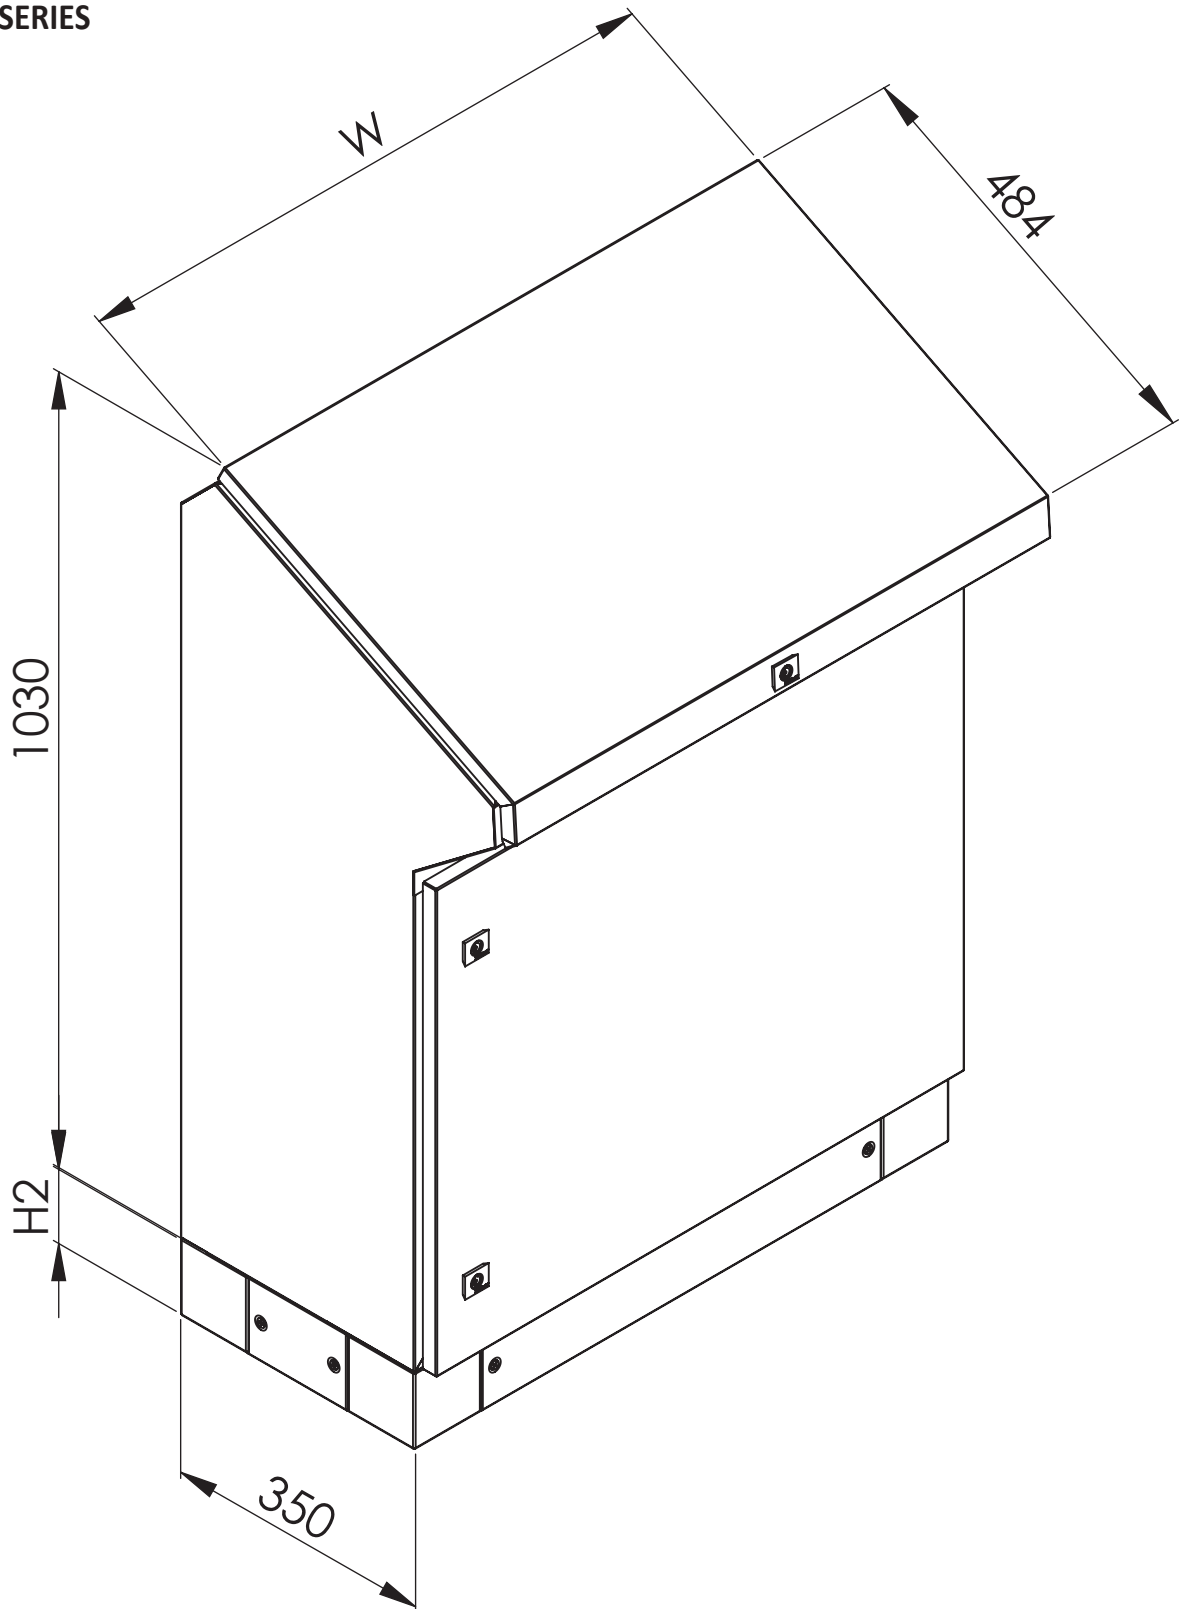

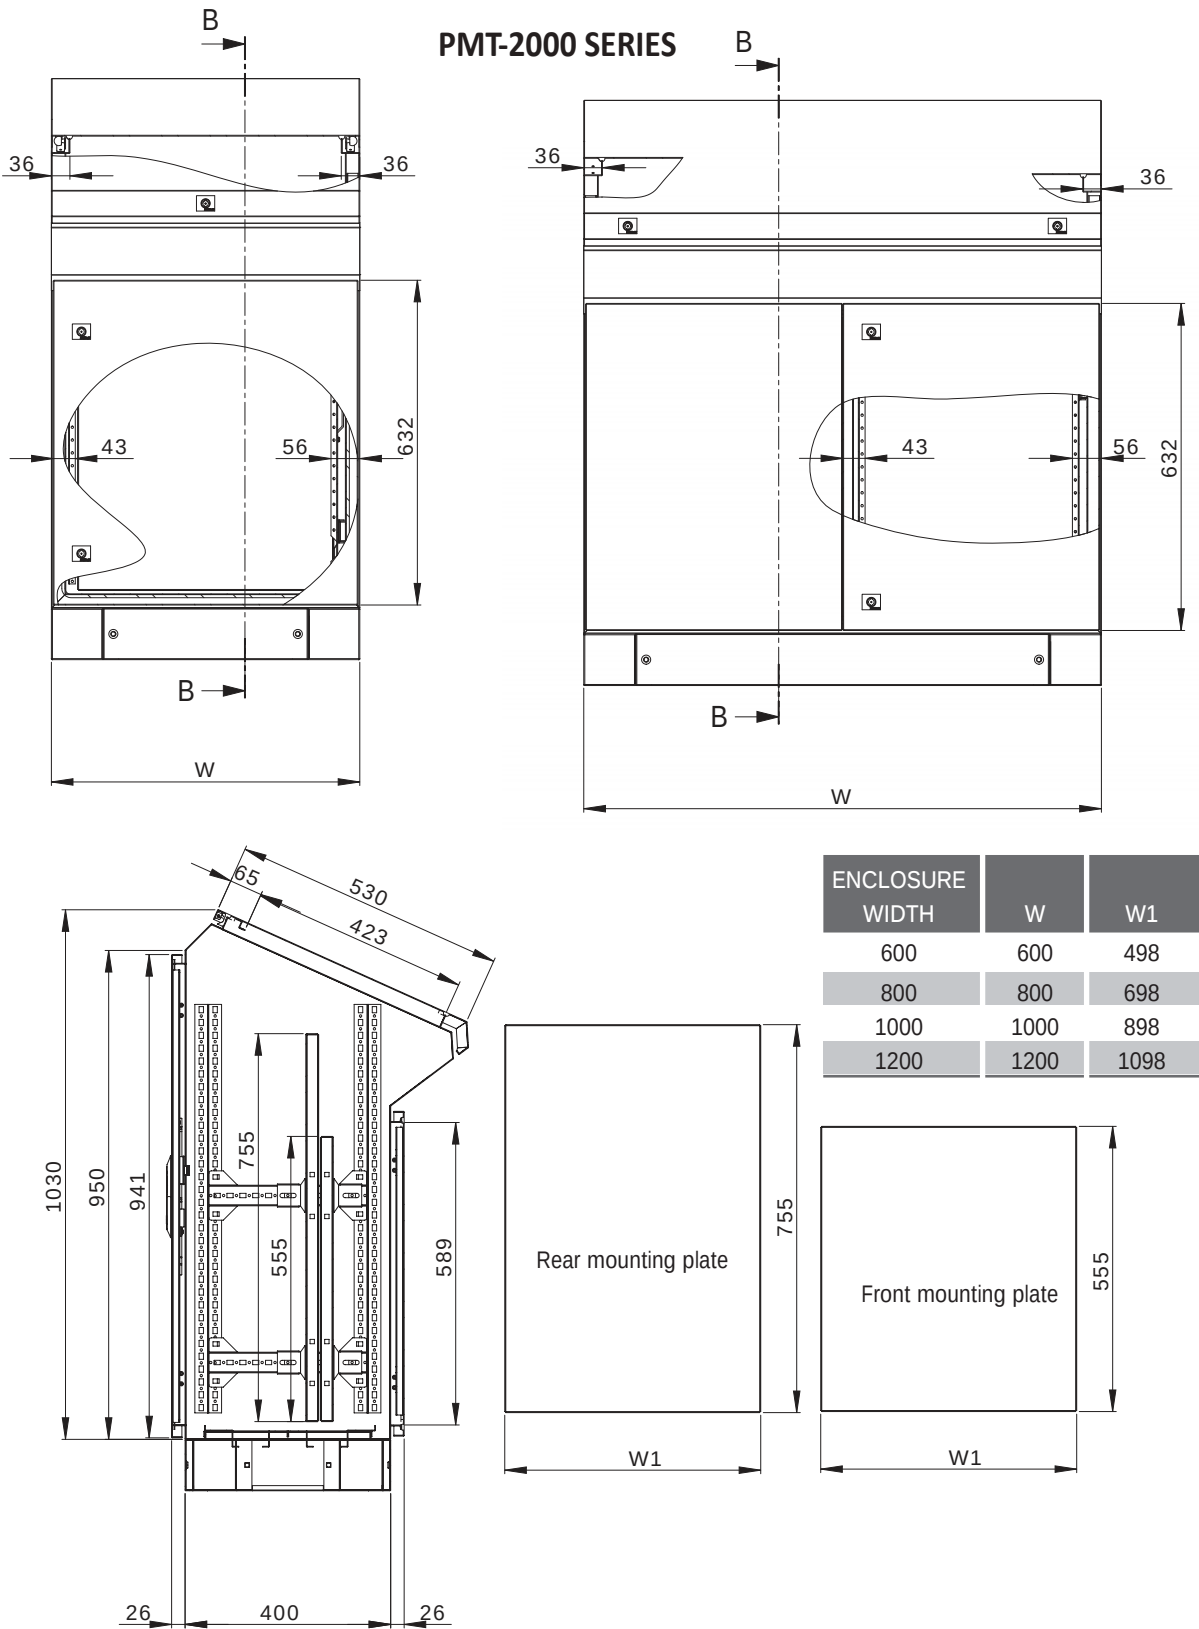


PMT-2000 SERIES

Material :Body, Doors : 1,50 mm mild steel + Ral 7035 coating




Mounting plate 2,00 mm Galvanized steel

Supply includes 1 pcs compact body, 1 pcs door, 1 pcs top panel with damper, 1 pcs rear door, 2 pcs mo Support Plinth Corner 2,00 mm Galvanized Steel + Ral 7035 coating

IP Protection IP 55


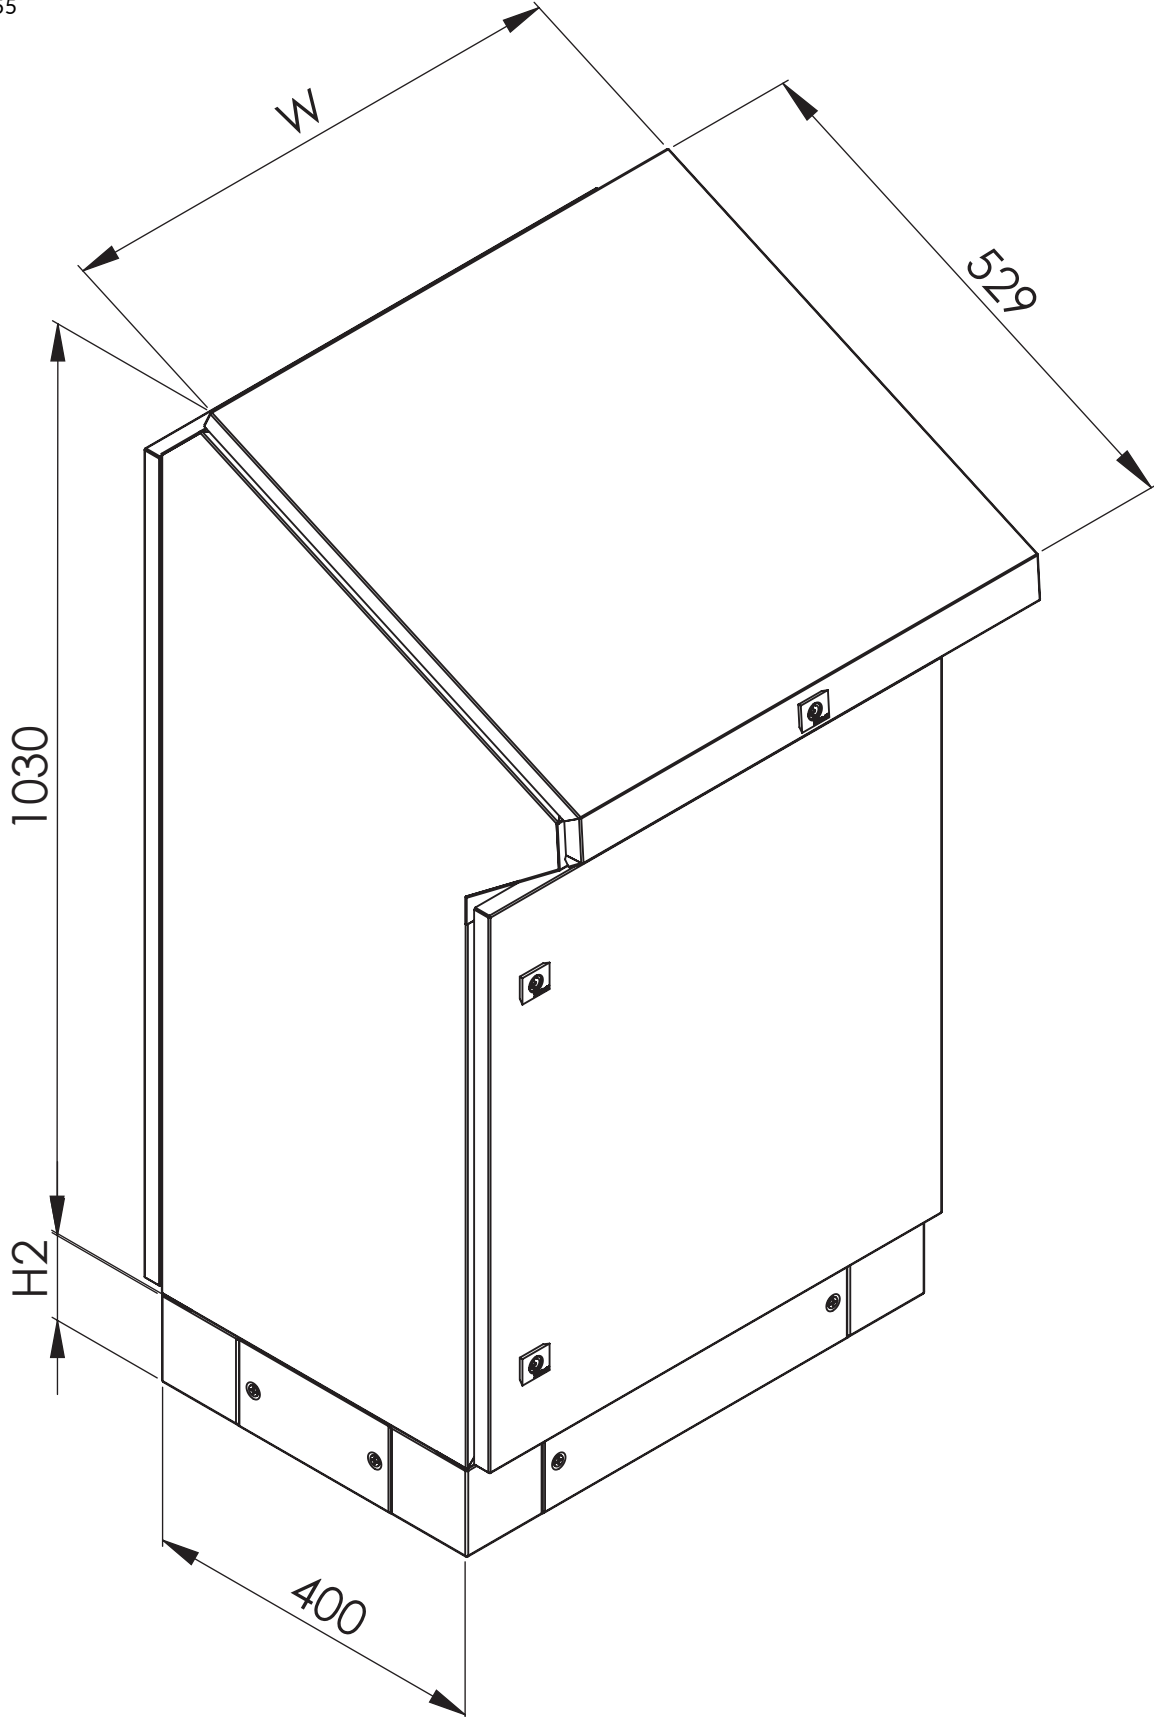


PMP-3000 SERIES

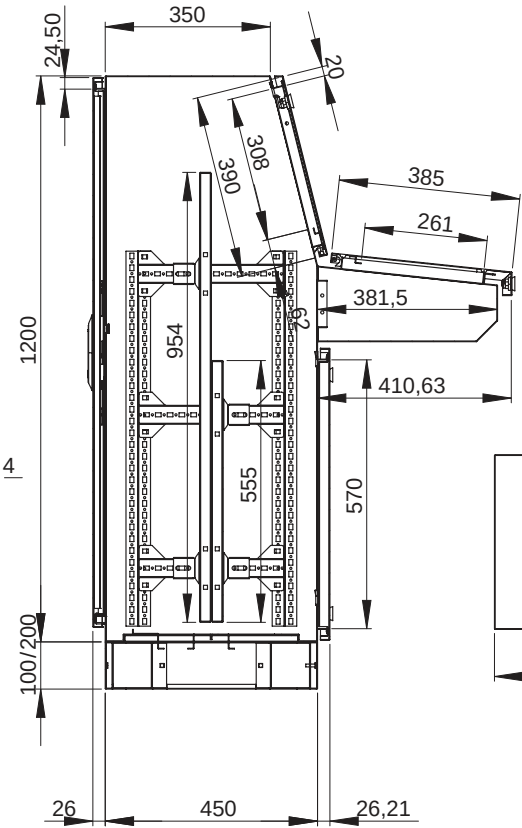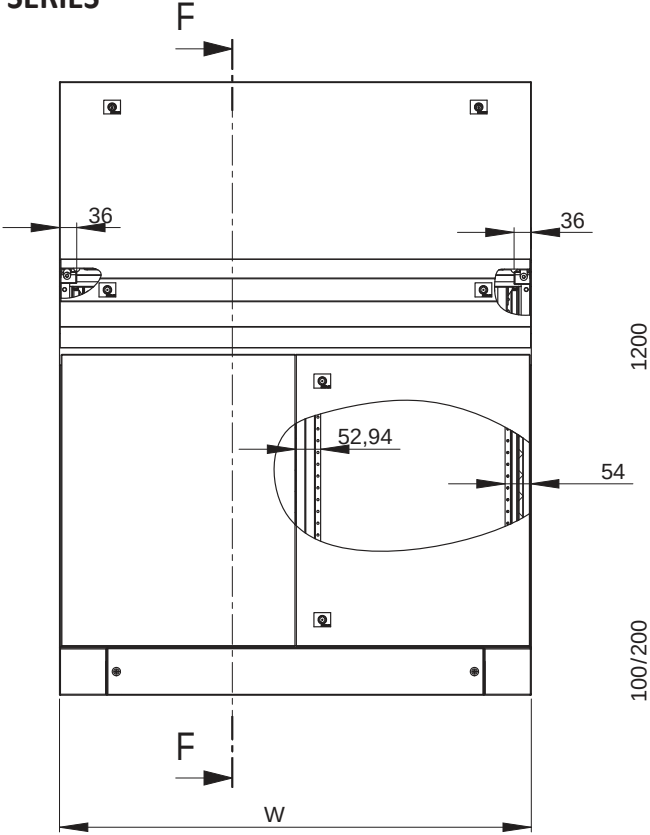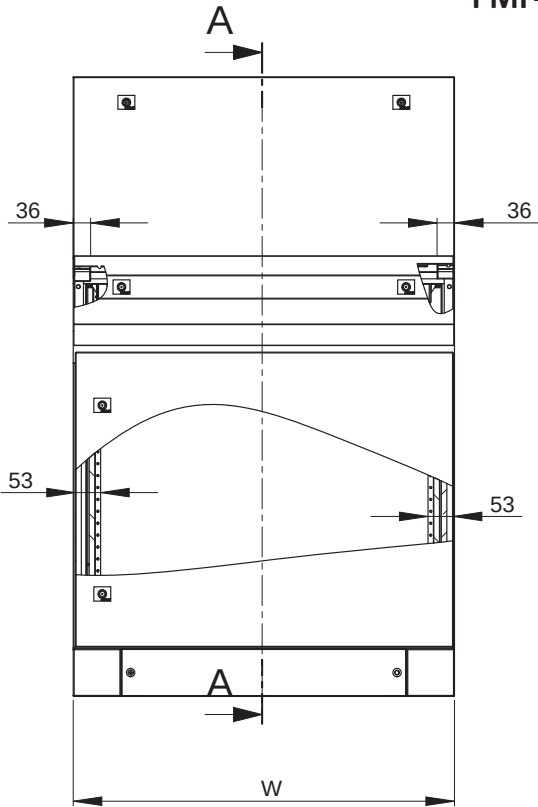

SECTION F-F

SCALE 1 : 10

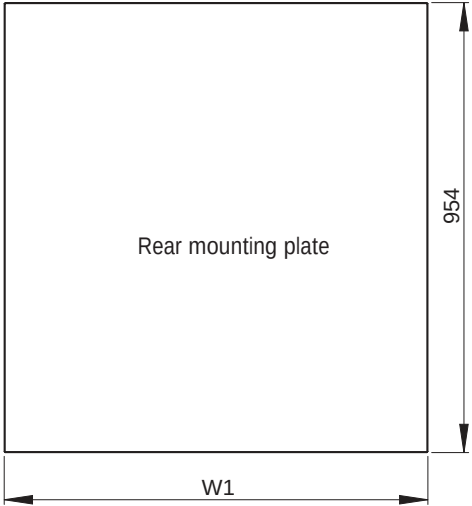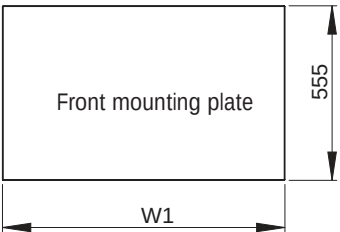

ENCLOSURE WIDTH	W	W1
600	600	498
800	800	698
1000	1000	898
1200	1200	1098

PMP-3000 SERIES


MaterialBody, Doors: 1,50 mm mild steel + Ral 7035 coating

Mounting plate2,00 mm Galvanized steel


Supply includes1 Pcs main body, 1 pcs console body and damper panel, 1 pcs top panel, 1 pcs front pan

Support Plinth Corner2,00 mm Galvanized Steel + Ral 7035 coating

IP ProtectionIP 55

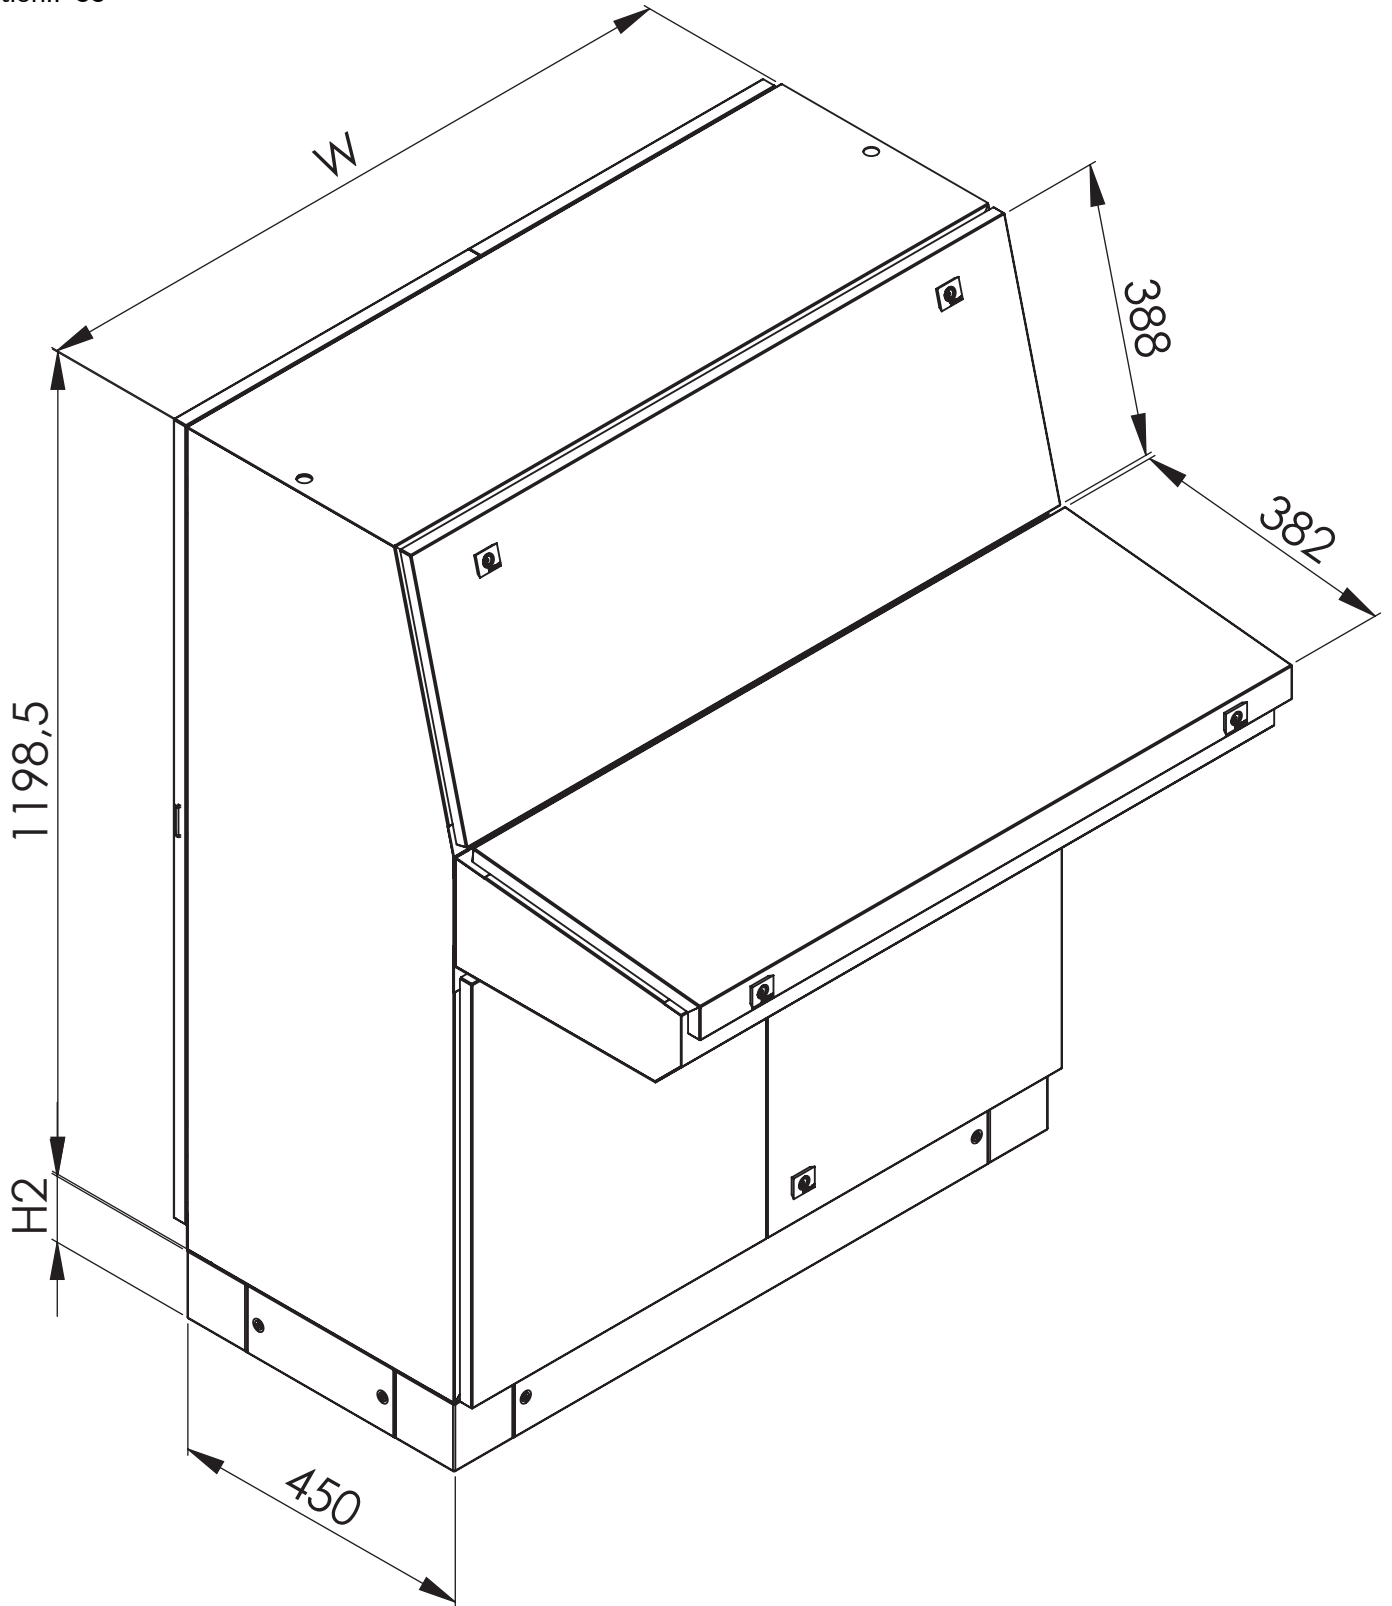

PC CABINET

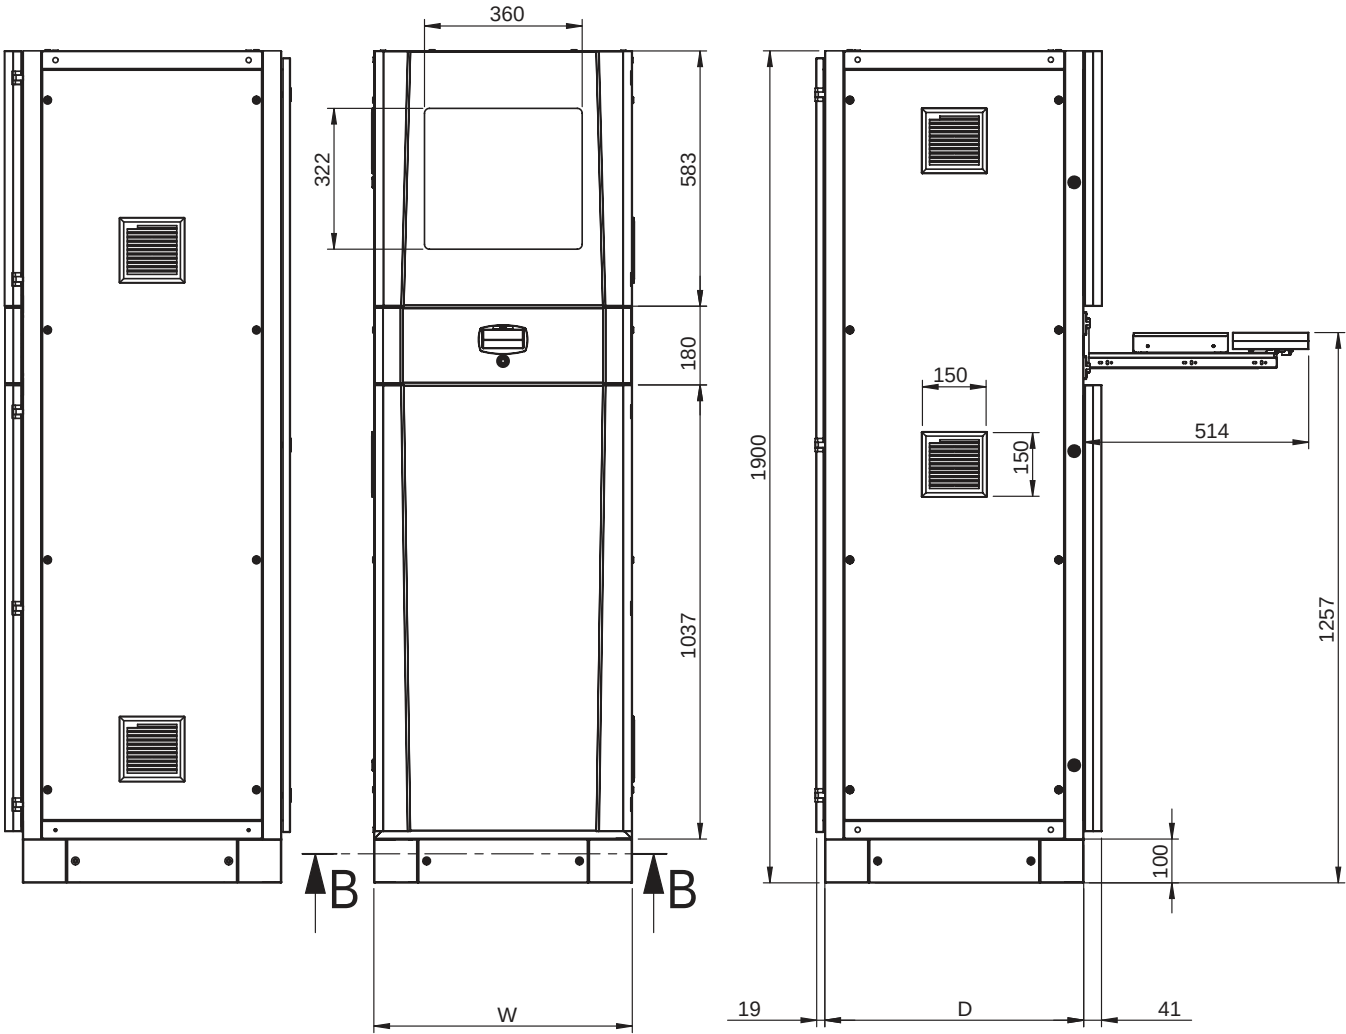

ENCLOSURE WIDTH	W	W1
600	590	440

ENCLOSURE DEPTH	D	D1
600	590	440
800	790	640

Completely Steel Material 1,50 mm mild steel + Ral 7035 coating

Glass 4mm tempered glass

Supply includes 1 Pcs body, Openable back door, 2 pcs partial front doors, sliding keyboard panel, Front Frame Ral 9005 coating

IP Protection IP 55

