


46W LED CANOPYLIGHT



POL-CL-0146

Photometric Curve

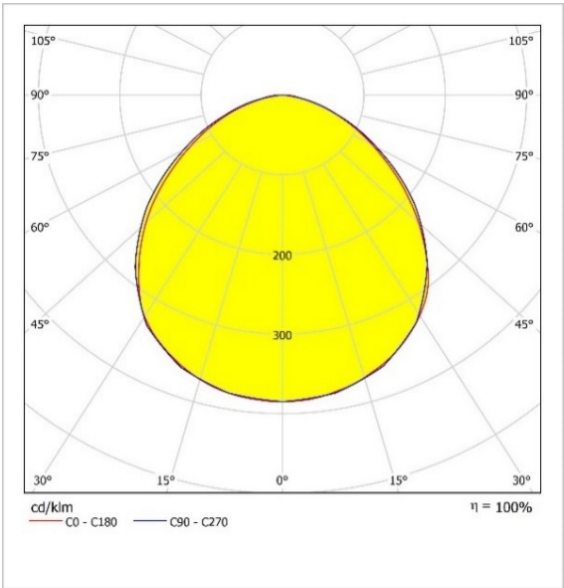

Product Data

Standard Features

Housing	: Aluminium injection housing
Diffuser	: Transparent glass
Optic	: Wide angle lens
IP Grade	: IP66
Installation	: Under the canopy
Light Source	: Power LED

Optical & Electrical Features

Power Consumption	: 45.8 W
Final Luminous Flux	: 6638.4 lm
Efficacy	: 144.9 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 4 kV
Drive Current	: 1450 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80


Other Features & Conditions

Operating Temperature Range	: -20 °C/ +50 °C
Impact Resistance	: IK07
Led Life Time - L70	: > 60.000 hours @Ta= 50 °C

Optional Features


Correlated Color Temperatures	: 5700 K
-------------------------------	----------

Diffuser Type : Sanded glass

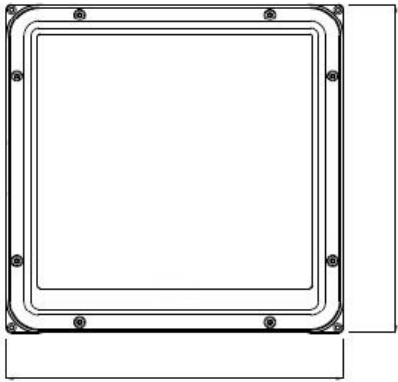

a

b



h

64W / 80W AVAILABLE.

