

30W LED STREETLIGHT;



POL-STL-0130



Standard Features

|              |                                               |
|--------------|-----------------------------------------------|
| Housing      | : SW 306G painted aluminium injection housing |
| Diffuser     | : Tempered transparent glass                  |
| Optic        | : 110° lens                                   |
| IP Grade     | : IP66                                        |
| Installation | : Pole mounted                                |
| Light Source | : Power LED                                   |

Optical & Electrical Features

|                              |                |
|------------------------------|----------------|
| Power Consumption            | : 30.4 W       |
| Final Luminous Flux          | : 3637.8 lm    |
| Efficacy                     | : 119.4 lm/W   |
| Input Voltage                | : 220-240 V AC |
| Frequency                    | : 50-60 Hz     |
| Power Factor                 | : > 0,9        |
| Surge Transient Protection   | : 6 kV         |
| Drive Current                | : 550 mA       |
| Correlated Color Temperature | : 4000K        |
| Color Rendering Index        | : >70          |

Other Features & Conditions

|                             |                              |
|-----------------------------|------------------------------|
| Operating Temperature Range | : -40 °C/ +60 °C             |
| Impact Resistance           | : IK08                       |
| Led Life Time - L70         | : > 145.000 hours @Ta= 60 °C |

Optional Features

|                               |                    |
|-------------------------------|--------------------|
| Correlated Color Temperatures | : 5000K, 6500K     |
| DALI                          | : Yes , RF Control |


Dimensions (mm)

|          |     |     |     |    |
|----------|-----|-----|-----|----|
|          | a   | b   | h   | d  |
| Standard | 639 | 310 | 104 | 85 |


Weight (kg)

|          |     |
|----------|-----|
| Standard | 6,7 |
|----------|-----|

Photometric Curve

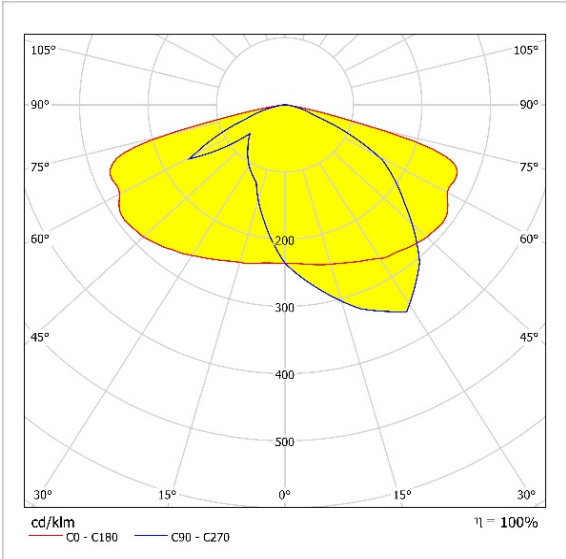

Vertical Installation Brackets

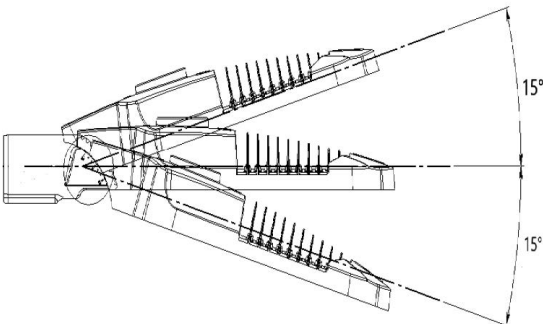

30W / 54W / 65W / 103W AVAILABLE.

