



360W LED PENDANT LUMINAIRE;

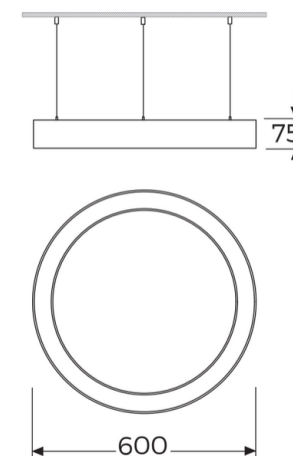

LTL-60-P

Photometric Curve

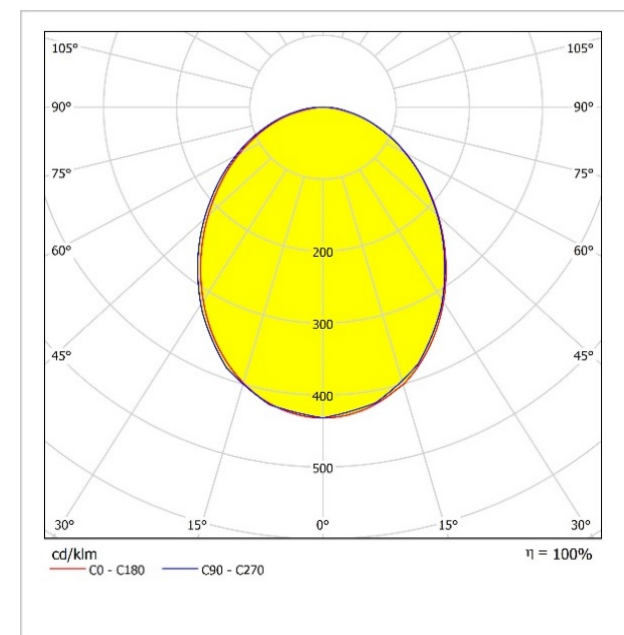

Standard Features

Housing	: RAL 9035 Powder finished aluminium extrusion housing, aluminium injection cover
Diffuser	: Glare minimizing highly permeable diffuser
IP Grade	: IP40
Installation	: Pendant
Light Source	: Mid Power LED

Optical & Electrical Features

Power Consumption	: 60W
Final Luminous Flux	: 4200 lm
Efficacy	: 70 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 1055mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

*There is $\pm 10\%$ tolerance in the technical values.

Other Features & Conditions

Operating Temperature Range	: -20 °C/+35 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+30 °C
Impact Resistance	: IK02
Led Life Time - L80	: > 50.000 hours @Ta= 25 °C

Optional Features

Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: 1-3 Hours
DALI Option	: Yes
Color Option	: RAL 7035

