


6W SPOT LIGHT;

PSL01-6R



Photometric Curve

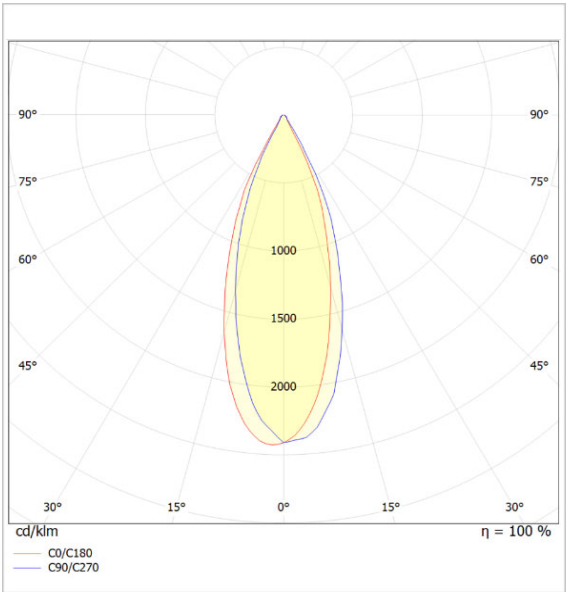

Standard Features

Housing	: Aluminium housing
Diffuser	: Transparent diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: COB LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 6 W
Final Luminous Flux	: 677 lm
Efficacy	: 103,89 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos ϕ > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80


* There is $\pm$ 10% Tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -5 °C/+45 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 50.000 hours @Ta= 45 °C

Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 4000K / 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Degree Option	: 24°- 36°

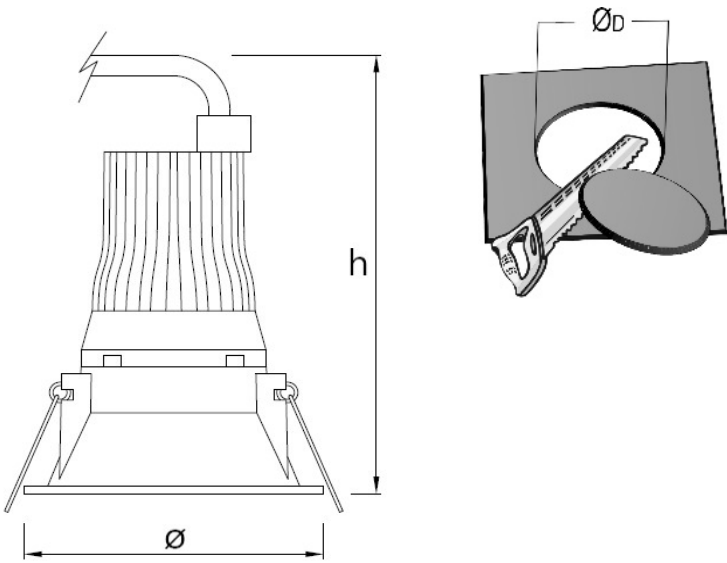

Dimensions (mm)

	Ø	h	ØD
Standard	85	115	76



6W SPOT LIGHT;

PSL02-6S



Standard Features

Housing	: Aluminium housing
Diffuser	: Transparent diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: COB LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 6 W
Final Luminous Flux	: 677 lm
Efficacy	: 103,89 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos ϕ > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is $\pm$ 10% Tolerance in Technical Values.



Other Features & Conditions

Operating Temperature Range	: -5 °C/+45 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 50.000 hours @Ta= 45 °C

Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 4000K / 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Degree Option	: 24°- 36°

Photometric Curve

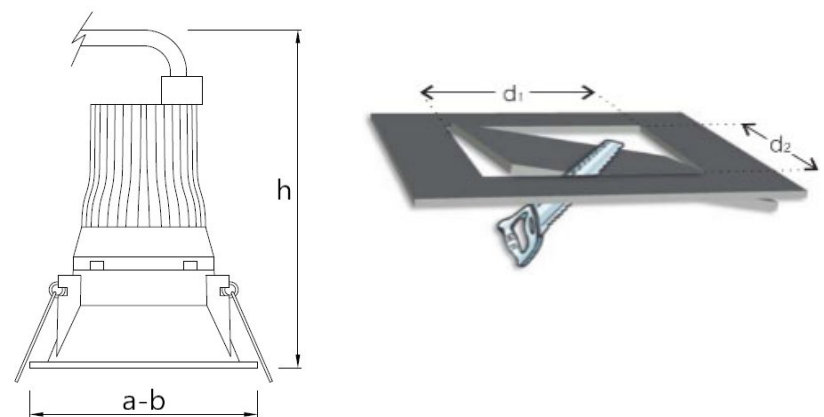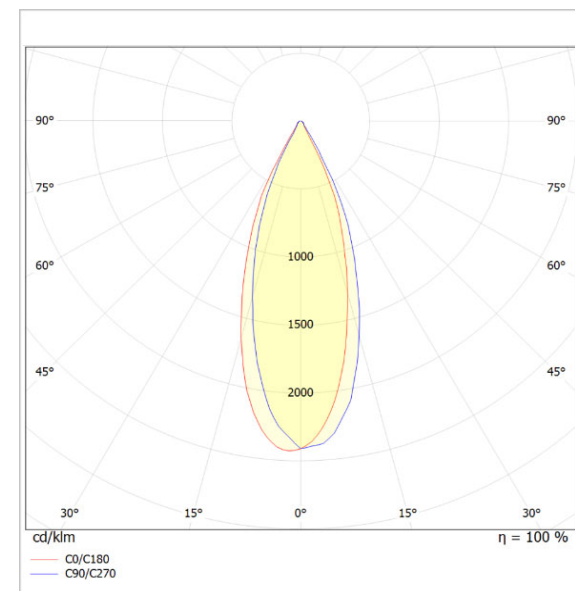

Dimensions (mm)

	a	b	h	d ¹ ,d ²
Standart	85	85	115	75x75



7W SPOT LIGHT;



PSL03-6R

Standard Features

Housing	: Aluminium housing
Diffuser	: Acrylic
Ceiling Type	: Plasterboard
IP Grade	: IP44
Installation	: Recessed mounted
Light Source	: COB LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 7W-250mA
Final Luminous Flux	: 590 lm
Efficiency	: 103,89 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80



* There is ± 10% Tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -5 °C/+30 °C
-----------------------------	----------------

Optional Features

Correlated Color Temperatures	: 3000K / 4000K
Emergency Kit Options	: NA
DALI Option	: NA
Degree Option	: NA

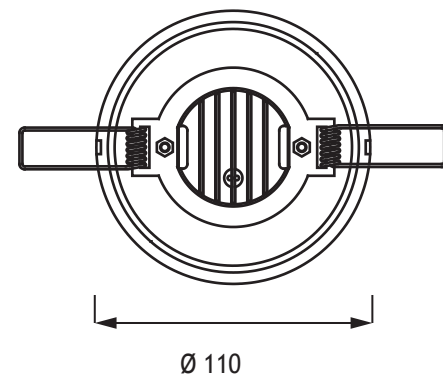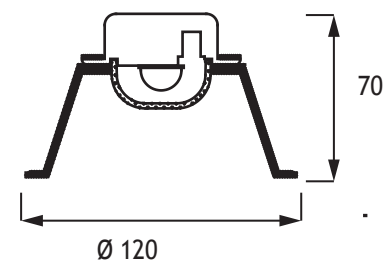

7W SPOT LIGHT;



PSL04-6S

Standard Features

Housing	: Aluminium housing
Diffuser	: Acrylic
Ceiling Type	: Plasterboard
IP Grade	: IP44
Installation	: Recessed mounted
Light Source	: COB LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 7W-250mA
Final Luminous Flux	: 590 lm
Efficiency	: 103,89 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos ϕ > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is $\pm$ 10% Tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -5 °C/+30 °C
-----------------------------	----------------

Optional Features

Correlated Color Temperatures	: 3000K / 4000K
Emergency Kit Options	: NA
DALI Option	: NA
Degree Option	: NA

