



### 38W PENDANT LED FRAME LUMINAIRE;

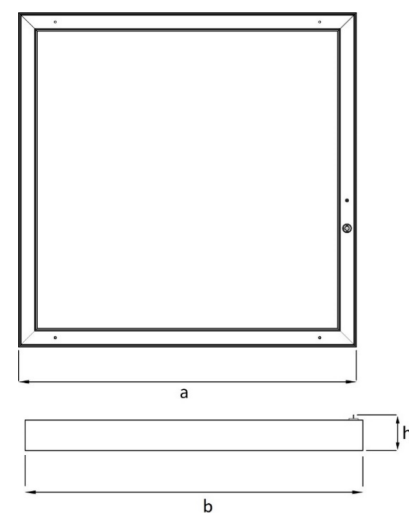

## LTL-38-F

Photometric Curve

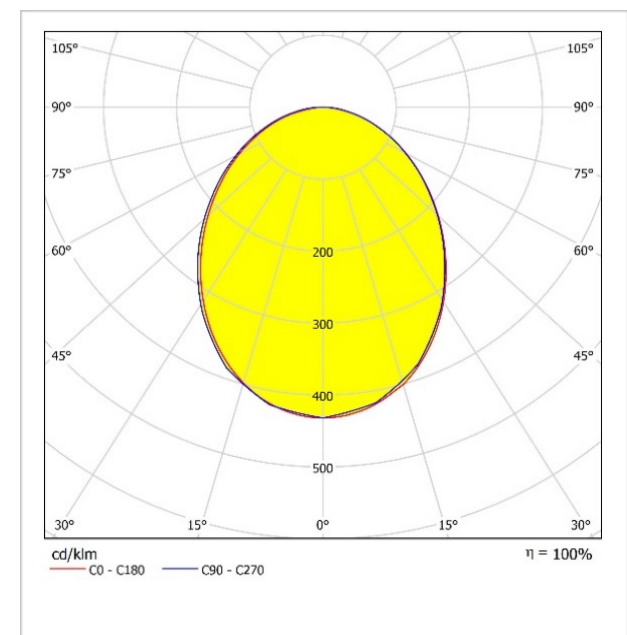

#### Standard Features

|              |                                                                                   |
|--------------|-----------------------------------------------------------------------------------|
| Housing      | : RAL 7047 Powder finished aluminium extrusion housing, aluminium injection cover |
| Diffuser     | : Glare minimizing highly permeable diffuser                                      |
| IP Grade     | : IP20                                                                            |
| Installation | : Pendant                                                                         |
| Light Source | : Mid Power LED                                                                   |

#### Optical & Electrical Features

|                              |                |
|------------------------------|----------------|
| Power Consumption            | : 37.5 W       |
| Final Luminous Flux          | : 3970.5 lm    |
| Efficacy                     | : 105.2 lm/W   |
| Input Voltage                | : 220-240 V AC |
| Frequency                    | : 50-60 Hz     |
| Power Factor                 | : > 0,9        |
| Surge Transient Protection   | : 1 kV         |
| Drive Current                | : 1055mA       |
| Correlated Color Temperature | : 4000K        |
| Color Rendering Index        | : >80          |

\*There is ±%10 tolerance in the technical values.

#### Other Features & Conditions

|                                                |                             |
|------------------------------------------------|-----------------------------|
| Operating Temperature Range                    | : -25 °C/+40 °C             |
| Operating Temperature Range With Emergency Kit | : +5 °C/+35 °C              |
| Impact Resistance                              | : IK02                      |
| Led Life Time - L70                            | : > 60.000 hours @Ta= 40 °C |

#### Optional Features

|                               |                |
|-------------------------------|----------------|
| Correlated Color Temperatures | : 3000K, 6500K |
| Emergency Kit Options         | : 1-3 Hours    |
| DALI Option                   | : Yes          |
| Color Option                  | : RAL 9005     |

#### Dimensions (mm)

|          | a   | b   | h   |
|----------|-----|-----|-----|
| Standard | 658 | 658 | 105 |

#### Weight (kg)

|                             |     |
|-----------------------------|-----|
| Standard                    | 6,3 |
| With Emergency Kit (1 hr.)  | 6,5 |
| With Emergency Kit (3 hrs.) | 6,5 |

